



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 441

SPECspeed®2017\_fp\_peak = 462

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

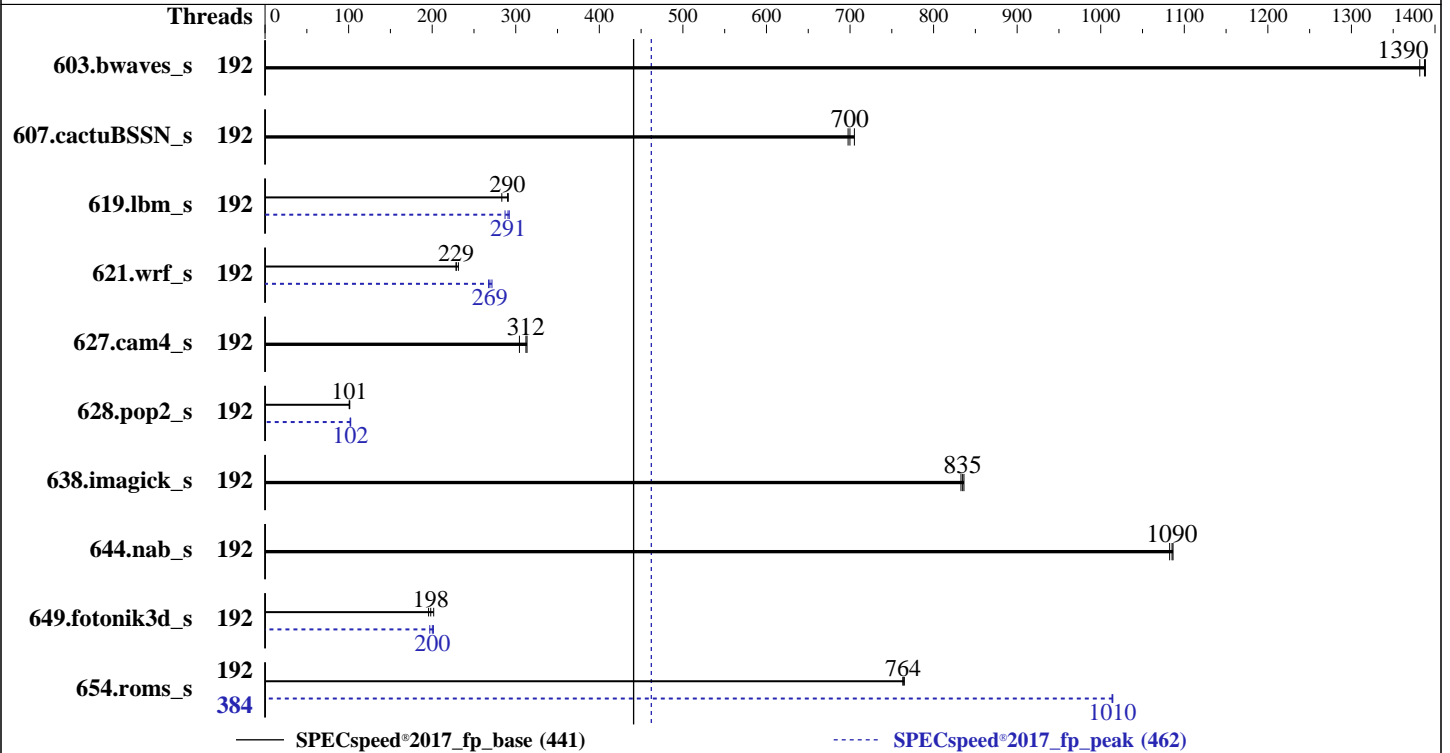

### Hardware

CPU Name: AMD EPYC 9654  
 Max MHz: 3700  
 Nominal: 2400  
 Enabled: 192 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip,  
 32 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 3.84 TB NVME SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version QGE115H 3.10 released Sep-2023  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECSpeed®2017\_fp\_base = 441

SPECSpeed®2017\_fp\_peak = 462

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	<b><u>42.5</u></b>	<b><u>1390</u></b>	42.7	1380	42.5	1390	192	<b><u>42.5</u></b>	<b><u>1390</u></b>	42.7	1380	42.5	1390
607.cactuBSSN_s	192	23.9	698	23.6	705	<b><u>23.8</u></b>	<b><u>700</u></b>	192	23.9	698	23.6	705	<b><u>23.8</u></b>	<b><u>700</u></b>
619.lbm_s	192	<b><u>18.0</u></b>	<b><u>290</u></b>	18.5	283	18.0	291	192	17.9	292	18.2	287	<b><u>18.0</u></b>	<b><u>291</u></b>
621.wrf_s	192	<b><u>57.8</u></b>	<b><u>229</u></b>	57.8	229	57.2	231	192	48.7	272	<b><u>49.2</u></b>	<b><u>269</u></b>	49.4	267
627.cam4_s	192	<b><u>28.4</u></b>	<b><u>312</u></b>	29.1	304	28.3	313	192	<b><u>28.4</u></b>	<b><u>312</u></b>	29.1	304	28.3	313
628.pop2_s	192	117	101	<b><u>118</u></b>	<b><u>101</u></b>	118	101	192	<b><u>116</u></b>	<b><u>102</u></b>	117	102	116	103
638.imagick_s	192	17.3	833	<b><u>17.3</u></b>	<b><u>835</u></b>	17.2	836	192	17.3	833	<b><u>17.3</u></b>	<b><u>835</u></b>	17.2	836
644.nab_s	192	16.1	1090	<b><u>16.1</u></b>	<b><u>1090</u></b>	16.1	1080	192	16.1	1090	<b><u>16.1</u></b>	<b><u>1090</u></b>	16.1	1080
649.fotonik3d_s	192	45.2	202	<b><u>46.0</u></b>	<b><u>198</u></b>	46.6	196	192	<b><u>45.5</u></b>	<b><u>200</u></b>	45.2	201	46.2	197
654.roms_s	192	20.6	765	<b><u>20.6</u></b>	<b><u>764</u></b>	20.6	763	384	15.5	1010	<b><u>15.5</u></b>	<b><u>1010</u></b>	15.5	1010

SPECSpeed®2017\_fp\_base = 441

SPECSpeed®2017\_fp\_peak = 462

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
To always enable THP for peak runs of:

603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 441

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

### Operating System Notes (Continued)

run as root.  
To disable THP for peak runs of 621.wrf\_s:  
'echo never > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.  
To enable THP only on request for peak runs of 654.roms\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-383"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/amd\_speed\_aocc400\_znver4\_A\_lib/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "384"

Environment variables set by runcpu during the 619.lbm\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-191"

Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-191"

Environment variables set by runcpu during the 628.pop2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-191"

Environment variables set by runcpu during the 649.fotonik3d\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-191"  
PGHPPF\_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms\_s peak run:  
GOMP\_CPU\_AFFINITY = "0 192 1 193 2 194 3 195 4 196 5 197 6 198 7 199 8 200 9 201 10 202 11 203 12 204 13  
205 14 206 15 207 16 208 17 209 18 210 19 211 20 212 21 213 22 214 23 215 24 216 25 217 26 218 27 219  
28 220 29 221 30 222 31 223 32 224 33 225 34 226 35 227 36 228 37 229 38 230 39 231 40 232 41 233 42  
234 43 235 44 236 45 237 46 238 47 239 48 240 49 241 50 242 51 243 52 244 53 245 54 246 55 247 56 248  
57 249 58 250 59 251 60 252 61 253 62 254 63 255 64 256 65 257 66 258 67 259 68 260 69 261 70 262 71  
263 72 264 73 265 74 266 75 267 76 268 77 269 78 270 79 271 80 272 81 273 82 274 83 275 84 276 85 277  
86 278 87 279 88 280 89 281 90 282 91 283 92 284 93 285 94 286 95 287 96 288 97 289 98 290 99 291 100  
292 101 293 102 294 103 295 104 296 105 297 106 298 107 299 108 300 109 301 110 302 111 303 112 304  
113 305 114 306 115 307 116 308 117 309 118 310 119 311 120 312 121 313 122 314 123 315 124 316 125  
317 126 318 127 319 128 320 129 321 130 322 131 323 132 324 133 325 134 326 135 327 136 328 137 329  
138 330 139 331 140 332 141 333 142 334 143 335 144 336 145 337 146 338 147 339 148 340 149 341 150  
342 151 343 152 344 153 345 154 346 155 347 156 348 157 349 158 350 159 351 160 352 161 353 162 354  
163 355 164 356 165 357 166 358 167 359 168 360 169 361 170 362 171 363 172 364 173 365 174 366 175  
367 176 368 177 369 178 370 179 371 180 372 181 373 182 374 183 375 184 376 185 377 186 378 187 379  
188 380 189 381 190 382 191 383"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 441

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
  
Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Oct 10 19:13:44 2023  
  
SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
19:13:44 up 2 min, 1 user, load average: 1.30, 1.02, 0.42  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 19:12 24.00s 1.33s 0.24s /bin/bash ./amd\_speed\_aocc400\_znver4\_A1.sh

-----

3. Username  
From environment variable \$USER: root

-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 441

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Nov-2022

### Platform Notes (Continued)

```

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 6190557
   max locked memory      (kbytes, -l) 2097152
   max memory size        (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size               (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes     (-u) 6190557
   virtual memory         (kbytes, -v) unlimited
   file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   -bash
   /bin/bash ./Run036-compliant-amd-speedfp.sh
   python3 ./run_amd_speed_aocc400_znver4_A1.py
   /bin/bash ./amd_speed_aocc400_znver4_A1.sh
   runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
   runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.059/templogs/preenv.fpspeed.059.0.log --lognum 059.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2

```

```

-----
6. /proc/cpuinfo
   model name      : AMD EPYC 9654 96-Core Processor
   vendor_id      : AuthenticAMD
   cpu family     : 25
   model          : 17
   stepping       : 1
   microcode      : 0xa10113b
   bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
   TLB size       : 3584 4K pages
   cpu cores      : 96
   siblings       : 192
   2 physical ids (chips)
   384 processors (hardware threads)
   physical id 0: core ids 0-95
   physical id 1: core ids 0-95
   physical id 0: apicids 0-191
   physical id 1: apicids 256-447
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu
   From lscpu from util-linux 2.37.2:
   Architecture:          x86_64

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 441

SPECspeed®2017\_fp\_peak = 462

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

CPU op-mode(s):          32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 384
On-line CPU(s) list:   0-383
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9654 96-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    96
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:            3707.8120
CPU min MHz:            1500.0000
BogoMIPS:               4792.90
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld

Virtualization:        AMD-V
L1d cache:             6 MiB (192 instances)
L1i cache:             6 MiB (192 instances)
L2 cache:              192 MiB (192 instances)
L3 cache:              768 MiB (24 instances)
NUMA node(s):          2
NUMA node0 CPU(s):    0-95,192-287
NUMA node1 CPU(s):    96-191,288-383
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                        filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 32K 6M 8 Data 1 64 1 64
L1i 32K 6M 8 Instruction 1 64 1 64
L2 1M 192M 8 Unified 2 2048 1 64
L3 32M 768M 16 Unified 3 32768 1 64

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 441

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-95,192-287
node 0 size: 773786 MB
node 0 free: 770154 MB
node 1 cpus: 96-191,288-383
node 1 size: 773878 MB
node 1 free: 772508 MB
node distances:
node  0  1
  0:  10  32
  1:  32  10
```

9. /proc/meminfo

```
MemTotal:      1584808240 kB
```

10. who -r

```
run-level 3 Oct 10 19:12
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
                issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix
                purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofsd autofsd-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmiev
                issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap ntp-wait
                ntpd nvme-f-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@
                smartd_generate_opts snmpd snmptrapd svnserv systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect       wickedd
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=57007a51-1b8d-4733-95f6-d7d0c84f41c9
splash=silent
quiet
security=apparmor
mitigations=auto
```

14. cpupower frequency-info

```
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                The governor "performance" may decide which speed to use
                within this range.
boost state support:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 441

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

Supported: yes  
Active: yes

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-znver4-A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2 btrfs 3.5T 186G 3.4T   6% /home

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR675 V3 System Board
Product Family:  ThinkSystem
Serial:          None

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 441

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

#### 21. dmidecode

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

24x SK Hynix HMC94MEBRA123N 64 GB 2 rank 4800

#### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: QGE115H-3.10  
BIOS Date: 09/07/2023  
BIOS Revision: 3.10  
Firmware Revision: 3.10

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 441

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 441

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 441

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Nov-2022

## Base Other Flags (Continued)

Fortran benchmarks:  
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:  
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:  
-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 441

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_peak = 462

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
654.roms_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

627.cam4\_s: basepeak = yes

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3  
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017\_fp\_base = 441

SPECspeed®2017\_fp\_peak = 462

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2023

**Hardware Availability:** Jul-2023

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

628.pop2\_s (continued):

```
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-T.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-10 07:13:44-0400.

Report generated on 2023-11-07 18:42:28 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-07.