



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = 401

CPU2017 License: 6573


Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

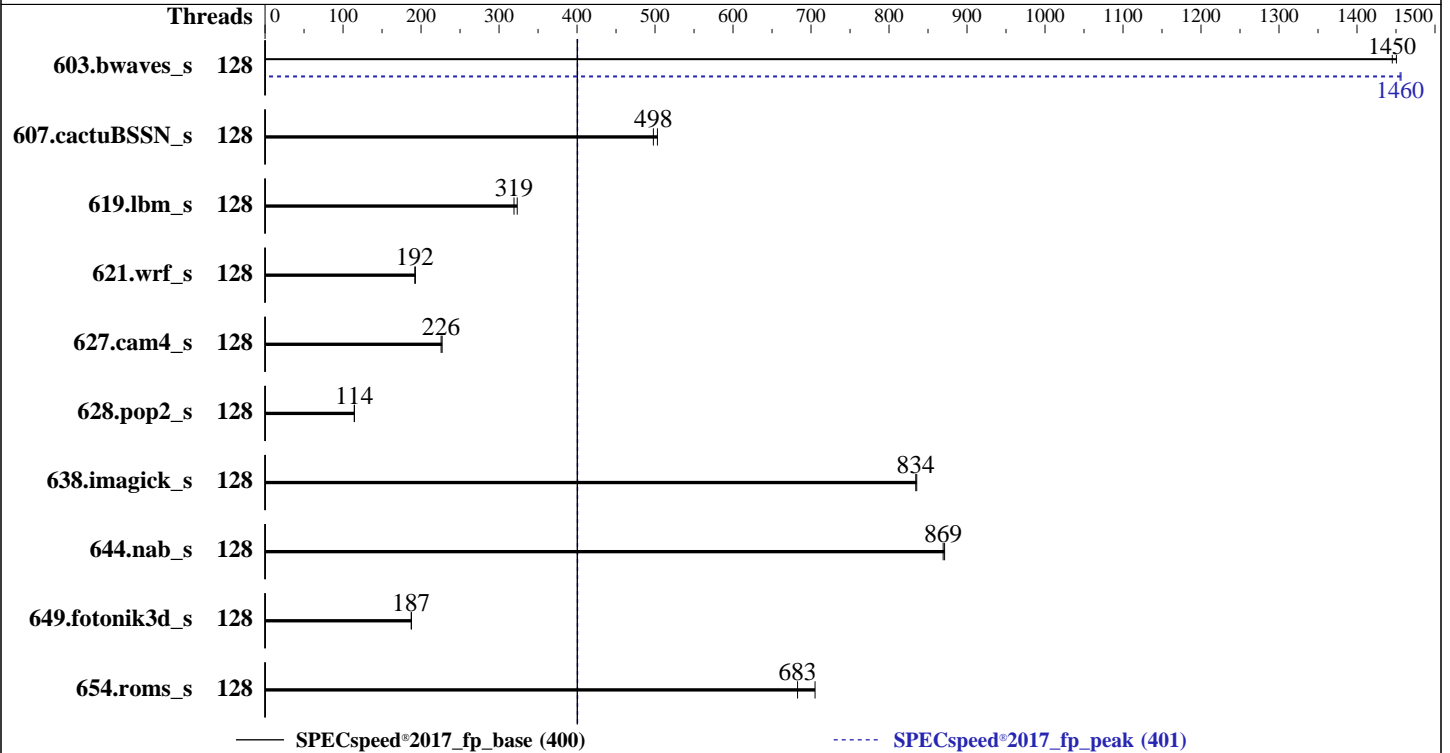

Hardware

CPU Name: Intel Xeon Platinum 8592+
 Max MHz: 3900
 Nominal: 1900
 Enabled: 128 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
 Storage: 80 GB on tmpfs
 Other: Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 2.0.0 released Nov-2023
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECSpeed®2017_fp_peak = 401

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | Peak | | | | | | | |
|-----------------|---------|--------------------|-------------------|--------------------|--------------------|---------|-------|---------|--------------------|--------------------|--------------------|-------------------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 128 | 40.7 | 1450 | <u>40.8</u> | <u>1450</u> | | | 128 | <u>40.5</u> | <u>1460</u> | 40.5 | 1460 | | |
| 607.cactuBSSN_s | 128 | <u>33.5</u> | <u>498</u> | 33.1 | 503 | | | 128 | <u>33.5</u> | <u>498</u> | 33.1 | 503 | | |
| 619.lbm_s | 128 | <u>16.4</u> | <u>319</u> | 16.2 | 323 | | | 128 | <u>16.4</u> | <u>319</u> | 16.2 | 323 | | |
| 621.wrf_s | 128 | <u>68.9</u> | <u>192</u> | 68.6 | 193 | | | 128 | <u>68.9</u> | <u>192</u> | 68.6 | 193 | | |
| 627.cam4_s | 128 | 39.0 | 227 | <u>39.3</u> | <u>226</u> | | | 128 | 39.0 | 227 | <u>39.3</u> | <u>226</u> | | |
| 628.pop2_s | 128 | 104 | 115 | <u>104</u> | <u>114</u> | | | 128 | 104 | 115 | <u>104</u> | <u>114</u> | | |
| 638.imagick_s | 128 | 17.3 | 836 | <u>17.3</u> | <u>834</u> | | | 128 | 17.3 | 836 | <u>17.3</u> | <u>834</u> | | |
| 644.nab_s | 128 | 20.1 | 871 | <u>20.1</u> | <u>869</u> | | | 128 | 20.1 | 871 | <u>20.1</u> | <u>869</u> | | |
| 649.fotonik3d_s | 128 | 48.6 | 188 | <u>48.6</u> | <u>187</u> | | | 128 | 48.6 | 188 | <u>48.6</u> | <u>187</u> | | |
| 654.roms_s | 128 | <u>23.1</u> | <u>683</u> | 22.3 | 705 | | | 128 | <u>23.1</u> | <u>683</u> | 22.3 | 705 | | |

SPECSpeed®2017_fp_base = **400**

SPECSpeed®2017_fp_peak = **401**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib_2023.0/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = 401

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Platform Notes

BIOS settings:

ADDC Setting : Disabled
DIMM Self Healing on
Uncorrectable Memory Error : Disabled

Logical Processor : Disabled
Virtualization Technology : Disabled
DCU Streamer Prefetcher : Disabled
Sub NUMA Cluster : 2-way Clustering
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
C1E : Disabled
C States : Autonomous
Memory Patrol Scrub : Disabled
Energy Efficiency Policy : Performance
PCI ASPM L1 Link
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Dec 15 15:41:13 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = 401

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
2. w
  15:41:13 up 5:27, 1 user, load average: 5.52, 4.55, 2.75
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1    -             10:14   2:11m  1.54s  0.00s  /bin/bash ./dell-run-speccpu.sh speed
--define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.5.1
--output_format html,pdf,txt --define DL-LQC=1
```

```
3. Username
   From environment variable $USER:  root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 4123945
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time              (seconds, -t) unlimited
max user processes     (-u) 4123945
virtual memory         (kbytes, -v) unlimited
file locks            (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 34
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=128 --tune base,peak -o all --define
drop_caches --define DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1 fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=128 --tune base,peak --output_format all
--define drop_caches --define DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.5.1 --output_format html,pdf,txt --define DL-LQC=1
--nopower --runmode speed --tune base:peak --size refspped fpspeed --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

```
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id      : GenuineIntel
cpu family     : 6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECSpeed®2017_fp_peak = 401

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores      : 64
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246,248,250,252,254

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) PLATINUM 8592+
CPU family:             6
Model:                  207
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):              2
Stepping:               2
BogoMIPS:               3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              256 MiB (128 instances)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = 401

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

L3 cache: 640 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68, 72, 76, 80, 84, 88, 92, 96, 100, 104, 108, 112, 116, 120, 124
NUMA node1 CPU(s): 2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62, 66, 70, 74, 78, 82, 86, 90, 94, 98, 102, 106, 110, 114, 118, 122, 126
NUMA node2 CPU(s): 1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 41, 45, 49, 53, 57, 61, 65, 69, 73, 77, 81, 85, 89, 93, 97, 101, 105, 109, 113, 117, 121, 125
NUMA node3 CPU(s): 3, 7, 11, 15, 19, 23, 27, 31, 35, 39, 43, 47, 51, 55, 59, 63, 67, 71, 75, 79, 83, 87, 91, 95, 99, 103, 107, 111, 115, 119, 123, 127

Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d | 48K | 6M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 4M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 256M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 320M | 640M | 20 | Unified | 3 | 262144 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus:
0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68, 72, 76, 80, 84, 88, 92, 96, 100, 104, 108, 112, 116, 120, 124
node 0 size: 257256 MB
node 0 free: 254670 MB
node 1 cpus:
2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62, 66, 70, 74, 78, 82, 86, 90, 94, 98, 102, 106, 110, 114, 118, 122, 126
node 1 size: 258039 MB
node 1 free: 257627 MB
node 2 cpus:
1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 41, 45, 49, 53, 57, 61, 65, 69, 73, 77, 81, 85, 89, 93, 97, 101, 105, 109, 113, 117, 121, 125
node 2 size: 258039 MB
node 2 free: 232000 MB
node 3 cpus:
3, 7, 11, 15, 19, 23, 27, 31, 35, 39, 43, 47, 51, 55, 59, 63, 67, 71, 75, 79, 83, 87, 91, 95, 99, 103, 107, 111, 115, 119, 123, 127
node 3 size: 257673 MB
node 3 free: 257036 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1055754612 kB

10. who -r

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECSpeed®2017_fp_peak = 401

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Platform Notes (Continued)

run-level 3 Dec 15 10:14

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

| STATE | UNIT FILES |
|-----------------|--|
| enabled | YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny |
| enabled-runtime | systemd-remount-fs |
| disabled | accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid iscsiuiio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 upower |
| indirect | wickedd |

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=825c10fd-7ec5-4674-a94f-b7ae4890083d
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=319M,high
crashkernel=72M,low

14. cpupower frequency-info

analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl

| | |
|------------------------------|-------|
| kernel.numa_balancing | 1 |
| kernel.randomize_va_space | 2 |
| vm.compaction_proactiveness | 20 |
| vm.dirty_background_bytes | 0 |
| vm.dirty_background_ratio | 10 |
| vm.dirty_bytes | 0 |
| vm.dirty_expire_centisecs | 3000 |
| vm.dirty_ratio | 20 |
| vm.dirty_writeback_centisecs | 500 |
| vm.dirtytime_expire_seconds | 43200 |
| vm.extfrag_threshold | 500 |
| vm.min_unmapped_ratio | 1 |
| vm.nr_hugepages | 0 |

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = 401

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
Filesystem  Type  Size  Used Avail Use% Mounted on
tmpfs       tmpfs 80G  4.1G  76G   6% /mnt/ramdisk

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R760xa
Product Family: PowerEdge
Serial:      1234567

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x 00AD063200AD HMC94AGBRA181N 64 GB 2 rank 5600

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     2.0.0
BIOS Date:        11/23/2023
BIOS Revision:    2.0

```




SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = 401

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = 401

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = 401

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 400

PowerEdge R760xa (Intel Xeon Platinum 8592+)

SPECspeed®2017_fp_peak = 401

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Dec-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-15 02:41:13-0500.

Report generated on 2024-02-28 19:14:22 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.