



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660xs (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_base = 471

SPECrate®2017\_fp\_peak = 484

CPU2017 License: 6573


Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

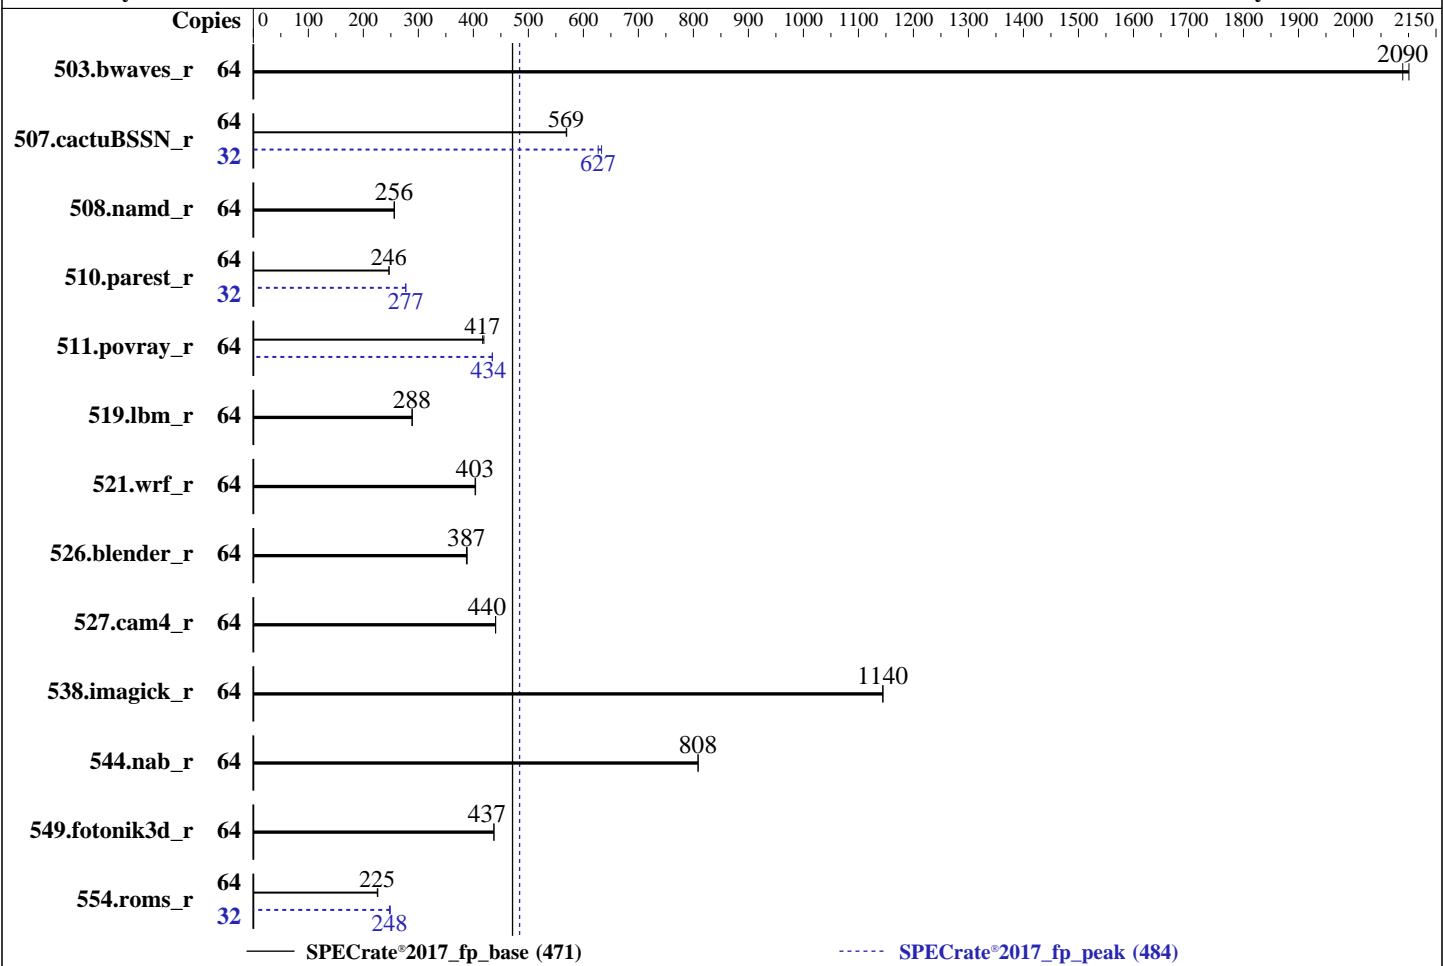

## Hardware

CPU Name: Intel Xeon Gold 6526Y  
 Max MHz: 3900  
 Nominal: 2800  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 37.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
 Storage: 125 GB on tmpfs  
 Other: Cooling: Air

## OS:

SUSE Linux Enterprise Server 15 SP5  
 5.14.21-150500.53-default

## Compiler:

C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;

## Parallel:

No

## Firmware:

Version 2.0.0 released Nov-2023

## File System:

tmpfs

## System State:

Run level 3 (multi-user)

## Base Pointers:

64-bit

## Peak Pointers:

64-bit

## Other:

jemalloc memory allocator V5.0.1

## Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage.

## Software



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 471

PowerEdge R660xs (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 484

CPU2017 License: 6573

Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	305	2100	<b>307</b>	<b>2090</b>			64	305	2100	<b>307</b>	<b>2090</b>		
507.cactusBSSN_r	64	<b>142</b>	<b>569</b>	142	570			32	64.0	633	<b>64.6</b>	<b>627</b>		
508.namd_r	64	237	257	<b>238</b>	<b>256</b>			64	237	257	<b>238</b>	<b>256</b>		
510.parest_r	64	<b>679</b>	<b>246</b>	678	247			32	302	277	<b>302</b>	<b>277</b>		
511.povray_r	64	356	419	<b>359</b>	<b>417</b>			64	344	434	<b>344</b>	<b>434</b>		
519.lbm_r	64	233	289	<b>234</b>	<b>288</b>			64	233	289	<b>234</b>	<b>288</b>		
521.wrf_r	64	<b>356</b>	<b>403</b>	355	404			64	<b>356</b>	<b>403</b>	355	404		
526.blender_r	64	<b>252</b>	<b>387</b>	251	389			64	<b>252</b>	<b>387</b>	251	389		
527.cam4_r	64	<b>254</b>	<b>440</b>	254	441			64	<b>254</b>	<b>440</b>	254	441		
538.imagick_r	64	<b>139</b>	<b>1140</b>	139	1140			64	<b>139</b>	<b>1140</b>	139	1140		
544.nab_r	64	<b>133</b>	<b>808</b>	133	809			64	<b>133</b>	<b>808</b>	133	809		
549.fotonik3d_r	64	570	437	<b>570</b>	<b>437</b>			64	570	437	<b>570</b>	<b>437</b>		
554.roms_r	64	449	226	<b>451</b>	<b>225</b>			32	204	249	<b>205</b>	<b>248</b>		

SPECrate®2017\_fp\_base = 471

SPECrate®2017\_fp\_peak = 484

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
`sync; echo 3 > /proc/sys/vm/drop_caches`  
 runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`  
`jemalloc`, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 471

PowerEdge R660xs (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 484

CPU2017 License: 6573

Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

- ADDDC Setting : Disabled
- DIMM Self Healing on
- Uncorrectable Memory Error : Disabled
  
- Virtualization Technology : Disabled
- DCU Streamer Prefetcher : Disabled
- Sub NUMA Cluster : 2-way Clustering
- LLC Prefetch : Disabled
- Dead Line LLC Alloc : Disabled
  
- System Profile : Custom
- CPU Power Management : Maximum Performance
- C1E : Disabled
- C States : Autonomous
- Memory Patrol Scrub : Disabled
- Energy Efficiency Policy : Performance
- PCI ASPM L1 Link
- Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Jan 8 22:15:38 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660xs (Intel Xeon Gold 6526Y)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_fp\_base = 471

SPECrate®2017\_fp\_peak = 484

Test Date: Jan-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

```
16. /sys/kernel/mm/transparent_hugepage  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
18. OS release  
19. Disk information  
20. /sys/devices/virtual/dmi/id  
21. dmidecode  
22. BIOS
```

---

```
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86_64 x86_64 x86_64 GNU/Linux
```

---

```
2. w  
22:15:38 up 3:40, 1 user, load average: 38.72, 57.55, 61.33  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 18:35 3:40m 1.09s 0.00s /bin/bash ./dell-run-speccpu.sh rate  
--define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define  
DL-VERS=v4.8.6 --output_format html,pdf,txt
```

---

```
3. Username  
From environment variable $USER: root
```

---

```
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 4124418  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority      (-r) 0  
stack size              (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 4124418  
virtual memory           (kbytes, -v) unlimited  
file locks              (-x) unlimited
```

---

```
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 34  
login -- root  
-bash  
/bin/bash ./DELL_rate.sh  
/bin/bash ./dell-run-main.sh rate  
/bin/bash ./dell-run-main.sh rate  
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1  
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt  
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1  
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=32 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --define DL-BIOS-SNC=2
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660xs (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_base = 471

SPECrate®2017\_fp\_peak = 484

CPU2017 License: 6573

Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
--iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define
DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

```
-----  
6. /proc/cpuinfo  
model name      : INTEL(R) XEON(R) GOLD 6526Y  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 207  
stepping        : 2  
microcode       : 0x21000200  
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss  
cpu cores       : 16  
siblings        : 32  
2 physical ids (chips)  
64 processors (hardware threads)  
physical id 0: core ids 0-15  
physical id 1: core ids 0-15  
physical id 0: apicids 0-31  
physical id 1: apicids 128-159
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.4:  
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         46 bits physical, 57 bits virtual  
Byte Order:            Little Endian  
CPU(s):                64  
On-line CPU(s) list:  0-63  
Vendor ID:             GenuineIntel  
Model name:            INTEL(R) XEON(R) GOLD 6526Y  
CPU family:            6  
Model:                 207  
Thread(s) per core:   2  
Core(s) per socket:   16  
Socket(s):             2  
Stepping:              2  
BogoMIPS:              5600.00  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology  
nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor  
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2  
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm  
abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single  
cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle  
avx2 smep bmi2 erms invpcid rtm cqmq rdt_a avx512f avx512dq rdseed adx smap
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660xs (Intel Xeon Gold 6526Y)

**SPECrate®2017\_fp\_base = 471**

**SPECrate®2017\_fp\_peak = 484**

CPU2017 License: 6573

Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
```

L1d cache:	1.5 MiB (32 instances)
L1i cache:	1 MiB (32 instances)
L2 cache:	64 MiB (32 instances)
L3 cache:	75 MiB (2 instances)
NUMA node(s):	4
NUMA node0 CPU(s):	0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60
NUMA node1 CPU(s):	2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62
NUMA node2 CPU(s):	1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61
NUMA node3 CPU(s):	3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	37.5M	75M	15	Unified	3	40960	1	64

-----

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60
node 0 size: 257424 MB
node 0 free: 256501 MB
node 1 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62
node 1 size: 258043 MB
node 1 free: 249003 MB
node 2 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61
node 2 size: 258043 MB
node 2 free: 257174 MB
node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63
node 3 size: 257622 MB
node 3 free: 256542 MB
node distances:
node 0 1 2 3
 0: 10 12 21 21
 1: 12 10 21 21
 2: 21 21 10 12
 3: 21 21 12 10
```

-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660xs (Intel Xeon Gold 6526Y)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_fp\_base = 471

SPECrate®2017\_fp\_peak = 484

Test Date: Jan-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

```
9. /proc/meminfo
MemTotal:      1055881540 kB

-----
10. who -r
    run-level 3 Jan  8 18:35

-----
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
    Default Target  Status
    multi-user      running

-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
    enabled-runtime systemd-remount-fs
    disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root instsvcdrv ipmi ipmievrd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
    indirect       wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
    root=UUID=a2071361-7500-4d59-ac2e-a3222a0598a9
    splash=silent
    mitigations=auto
    quiet
    security=apparmor
    crashkernel=36M,high
    crashkernel=72M,low

-----
14. cpupower frequency-info
    analyzing CPU 0:
    Unable to determine current policy
    boost state support:
    Supported: yes
    Active: yes

-----
15. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space      2
    vm.compaction_proactiveness   20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio     10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs     3000
    vm.dirty_ratio                 20
    vm.dirty_writeback_centisecs  500
    vm.dirtytime_expire_seconds   43200
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 471

PowerEdge R660xs (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 484

CPU2017 License: 6573

Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
vm.extfrag_threshold      500
vm.min_unmapped_ratio    1
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness             60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode      0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP5

-----
19. Disk information
    SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
    Filesystem      Type  Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  125G  4.1G  121G   4% /mnt/ramdisk

-----
20. /sys/devices/virtual/dmi/id
    Vendor:        Dell Inc.
    Product:       PowerEdge R660xs
    Product Family: PowerEdge
    Serial:        1234567

-----
21. dmidecode
    Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        16x 00AD069D00AD HMCG94AGBRA182N 64 GB 2 rank 5600, configured at 5200

-----
22. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:        Dell Inc.
    BIOS Version:       2.0.0
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660xs (Intel Xeon Gold 6526Y)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_fp\_base = 471

SPECrate®2017\_fp\_peak = 484

Test Date: Jan-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

BIOS Date: 11/23/2023  
BIOS Revision: 2.0

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660xs (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_base = 471

SPECrate®2017\_fp\_peak = 484

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2024

Hardware Availability: Nov-2023

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017\_fp\_base = 471

PowerEdge R660xs (Intel Xeon Gold 6526Y)

SPECCrate®2017\_fp\_peak = 484

CPU2017 License: 6573

Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 471

PowerEdge R660xs (Intel Xeon Gold 6526Y)

SPECrate®2017\_fp\_peak = 484

CPU2017 License: 6573

Test Date: Jan-2024

Test Sponsor: Dell Inc.

Hardware Availability: Nov-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-08 17:15:38-0500.

Report generated on 2024-02-28 19:26:11 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.