



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016


Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

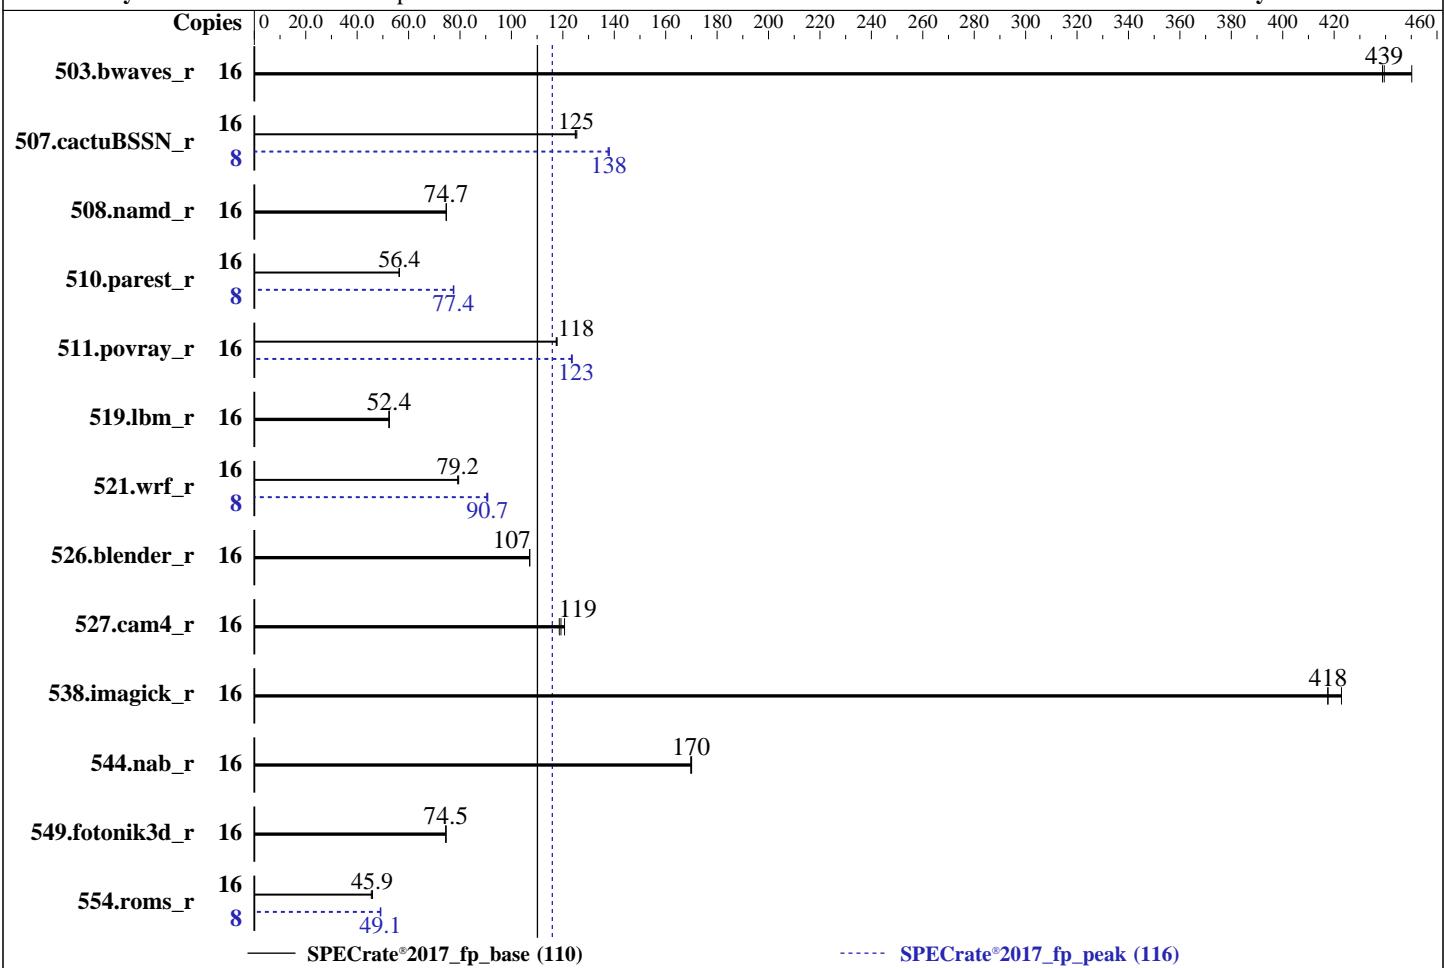

Hardware		Software	
CPU Name:	Intel Xeon E-2468	OS:	SUSE Linux Enterprise Server 15 SP5 (x86_64)
Max MHz:	5200	Compiler:	Kernel 5.14.21-150500.53-default
Nominal:	2600		C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	8 cores, 1 chip, 2 threads/core		Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
Orderable:	1 chip	Parallel:	No
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	Version 0502 released Dec-2023
L2:	2 MB I+D on chip per core	File System:	xfs
L3:	24 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)	Peak Pointers:	64-bit
Storage:	1 x 1 TB SATA SSD	Other:	jemalloc memory allocator V5.0.1
Other:	CPU Cooling: Air	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	356	450	366	439	<u>365</u>	<u>439</u>	16	356	450	366	439	<u>365</u>	<u>439</u>
507.cactuBSSN_r	16	162	125	<u>162</u>	<u>125</u>	161	125	8	<u>73.5</u>	<u>138</u>	73.3	138	<u>73.6</u>	<u>138</u>
508.namd_r	16	<u>204</u>	<u>74.7</u>	204	74.6	203	74.7	16	<u>204</u>	<u>74.7</u>	204	74.6	<u>203</u>	<u>74.7</u>
510.parest_r	16	<u>742</u>	<u>56.4</u>	744	56.3	742	56.4	8	270	77.6	270	77.4	<u>270</u>	<u>77.4</u>
511.povray_r	16	317	118	318	117	<u>318</u>	<u>118</u>	16	<u>303</u>	<u>123</u>	303	123	<u>302</u>	<u>124</u>
519.lbm_r	16	<u>322</u>	<u>52.4</u>	322	52.5	322	52.4	16	<u>322</u>	<u>52.4</u>	322	52.5	<u>322</u>	<u>52.4</u>
521.wrf_r	16	451	79.5	<u>453</u>	<u>79.2</u>	453	79.1	8	<u>198</u>	<u>90.7</u>	198	90.4	<u>197</u>	<u>90.8</u>
526.blender_r	16	<u>228</u>	<u>107</u>	228	107	228	107	16	<u>228</u>	<u>107</u>	228	107	<u>228</u>	<u>107</u>
527.cam4_r	16	236	119	232	121	<u>235</u>	<u>119</u>	16	236	119	232	121	<u>235</u>	<u>119</u>
538.imagick_r	16	94.1	423	95.3	417	<u>95.3</u>	<u>418</u>	16	94.1	423	95.3	417	<u>95.3</u>	<u>418</u>
544.nab_r	16	158	170	159	170	<u>158</u>	<u>170</u>	16	158	170	159	170	<u>158</u>	<u>170</u>
549.fotonik3d_r	16	837	74.5	837	74.5	<u>837</u>	<u>74.5</u>	16	837	74.5	837	74.5	<u>837</u>	<u>74.5</u>
554.roms_r	16	<u>554</u>	<u>45.9</u>	553	46.0	559	45.5	8	<u>259</u>	<u>49.1</u>	258	49.2	<u>259</u>	<u>49.0</u>

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/ic24u0/lib/intel64:/ic24u0/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

VT-d = Disabled

Package C State Limit = C0/C1

AES = Disabled

Engine Boost = Level3(Max)

SR-IOV Support = Disabled

Energy Efficient Turbo = Enabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /ic24u0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Mar 26 19:21:58 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```
19:21:58 up 4:30, 2 users, load average: 11.73, 15.03, 15.68
USER      TTY      FROM           LOGIN@     IDLE     JCPU    PCPU WHAT
root      tty1      -           14:52      4:29m   0.58s   0.00s /bin/bash ./rate.sh
root      tty2      -           15:04      4:17m   0.01s   0.01s -bash
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 256577
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes       (-u) 256577
virtual memory           (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 -c
  ic2024.0.2-lin-xeon_e-core-avx2-rate-20231213.cfg --define smt-on --define cores=8 --define
  physicallogical --define no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 --configfile
  ic2024.0.2-lin-xeon_e-core-avx2-rate-20231213.cfg --define smt-on --define cores=8 --define
  physicallogical --define no-numa --tune base,peak --output_format all --define drop_caches --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.095/templogs/preenv.fprate.095.0.log --lognum 095.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic24u0
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) E E-2468
vendor_id       : GenuineIntel
cpu family     : 6
model          : 183
stepping        : 1
microcode       : 0x11f
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss
cpu cores       : 8
siblings        : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

physical id 0: apicids 0-15

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 48 bits virtual
Byte Order:	Little Endian
CPU(s):	16
On-line CPU(s) list:	0-15
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) E E-2468
CPU family:	6
Model:	183
Thread(s) per core:	2
Core(s) per socket:	8
Socket(s):	1
Stepping:	1
CPU max MHz:	6700.0000
CPU min MHz:	800.0000
BogoMIPS:	5222.40
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrm pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsaves split_lock_detect avx_vnni dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp hwp_pkg_req hfi umip pku ospke waitpkg gfni vpclmulqdq tme rdpid movdir64b fsrm md_clear serialize pconfig arch_lbr flush_lld arch_capabilities
Virtualization:	VT-x
L1d cache:	384 KiB (8 instances)
L1i cache:	256 KiB (8 instances)
L2 cache:	16 MiB (8 instances)
L3 cache:	24 MiB (1 instance)
NUMA node(s):	1
NUMA node0 CPU(s):	0-15
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	2M	16M	16	Unified	2	2048	1	64
L3	24M	24M	12	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-15

node 0 size: 64174 MB

node 0 free: 51396 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 65714412 kB

10. who -r

run-level 3 Mar 26 14:51

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronynd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default

root=UUID=c7ea704b-969d-4a21-bb75-dacf025811fc

splash=silent

mitigations=auto

quiet

security=apparmor

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 800 MHz and 6.40 GHz.

The governor "performance" may decide which speed to use
within this range.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```
boost state support:  
Supported: yes  
Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing          0  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs        60000  
defrag                      1  
max_ptes_none                511  
max_ptes_shared              256  
max_ptes_swap                64  
pages_to_scan                4096  
scan_sleep_millisecs         10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP5
```

```
-----  
19. Disk information  
SPEC is set to: /ic24u0  
Filesystem  Type  Size  Used  Avail Use% Mounted on  
/dev/sda8    xfs   763G  34G  730G  5% /
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:      ASUSTeK COMPUTER INC.  
Product:     RS300-E12-RS4  
Product Family: Server  
Serial:      865236000406
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x SK Hynix HMCG88MEBEA081N 32 GB 2 rank 4800, configured at 4400
1x SK Hynix HMCG88MEBEA084N 32 GB 2 rank 4800, configured at 4400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 0502
BIOS Date: 12/28/2023
BIOS Revision: 5.2

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Base Portability Flags (Continued)

544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p13-V1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p13-V1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(2.60 GHz, Intel Xeon E-2468)

SPECrate®2017_fp_base = 110

SPECrate®2017_fp_peak = 116

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-26 07:21:57-0400.

Report generated on 2024-04-24 14:31:12 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-24.