



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECSpeed®2017_fp_base = 82.5

SPECSpeed®2017_fp_peak = 82.5

CPU2017 License: 9016


Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

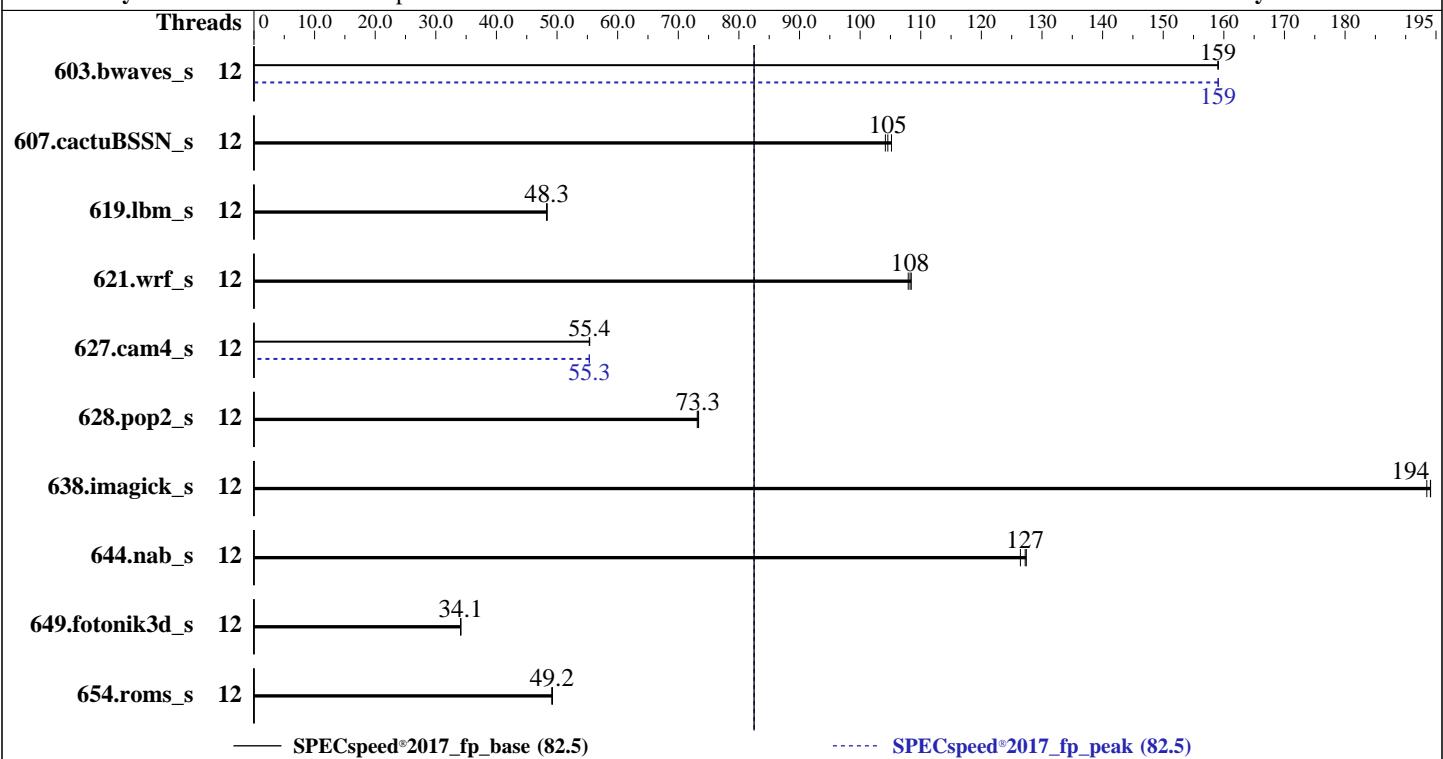

— SPECSpeed®2017_fp_base (82.5)

----- SPECSpeed®2017_fp_peak (82.5)

Hardware

CPU Name: Intel Xeon E-2486
Max MHz: 5600
Nominal: 3500
Enabled: 6 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 18 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)
Storage: 1 x 1 TB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5 (x86_64)
Kernel 5.14.21-150500.53-default
Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 0502 released Dec-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_fp_base = 82.5

SPECspeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	12	371	159	371	159	371	159	12	371	159	371	159	371	159
607.cactuBSSN_s	12	159	105	159	105	160	104	12	159	105	159	105	160	104
619.lbm_s	12	108	48.3	108	48.4	109	48.3	12	108	48.3	108	48.4	109	48.3
621.wrf_s	12	122	108	122	108	123	108	12	122	108	122	108	123	108
627.cam4_s	12	160	55.4	160	55.4	160	55.3	12	160	55.3	160	55.3	160	55.3
628.pop2_s	12	162	73.4	162	73.3	162	73.1	12	162	73.4	162	73.3	162	73.1
638.imagick_s	12	74.3	194	74.6	193	74.3	194	12	74.3	194	74.6	193	74.3	194
644.nab_s	12	138	126	137	127	137	127	12	138	126	137	127	137	127
649.fotonik3d_s	12	267	34.1	267	34.1	267	34.1	12	267	34.1	267	34.1	267	34.1
654.roms_s	12	320	49.3	320	49.1	320	49.2	12	320	49.3	320	49.1	320	49.2
SPECspeed®2017_fp_base = 82.5							SPECspeed®2017_fp_peak = 82.5							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/ic24u0/lib/intel64:/ic24u0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_fp_base = 82.5

SPECspeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes

BIOS Configuration:

VT-d = Disabled

Package C State Limit = C0/C1

AES = Disabled

Engine Boost = Level3(Max)

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /ic24u0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Mar 28 18:48:43 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
18:48:43 up 8:42, 2 users, load average: 3.04, 4.53, 3.19
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 10:10 8:37m 0.57s 0.00s /bin/bash ./speed.sh
root tty2 - 13:18 2:15m 0.02s 0.02s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_fp_base = 82.5

SPECspeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 256581
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 256581
virtual memory            (kbytes, -v) unlimited
file locks                  (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./speed.sh
/bin/bash ./speed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.0.2-lin-core-avx2-speed-20231213.cfg --define cores=12 --tune base,peak -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.0.2-lin-core-avx2-speed-20231213.cfg --define cores=12 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.103/templogs/preenv.fpspeed.103.0.log --lognum 103.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic24u0
```

```
-----
6. /proc/cpuinfo
  model name      : Intel(R) Xeon(R) E E-2486
  vendor_id       : GenuineIntel
  cpu family      : 6
  model           : 183
  stepping         : 1
  microcode        : 0x11f
  bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_pbrsb
  cpu cores        : 6
  siblings          : 12
  1 physical ids (chips)
  12 processors (hardware threads)
  physical id 0: core ids 0-5
  physical id 0: apicids 0-11
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
```

```
From lscpu from util-linux 2.37.4:
  Architecture:          x86_64
  CPU op-mode(s):        32-bit, 64-bit
  Address sizes:         48 bits physical, 48 bits virtual
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_fp_base = 82.5

SPECspeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```

Byte Order: Little Endian
CPU(s): 12
On-line CPU(s) list: 0-11
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) E E-2486
CPU family: 6
Model: 183
Thread(s) per core: 2
Core(s) per socket: 6
Socket(s): 1
Stepping: 1
CPU max MHz: 7200.0000
CPU min MHz: 800.0000
BogoMIPS: 6988.80
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
       x2apic movbe popcnt tsc_deadline_timer xsave avx f16c rdrand lahf_lm abm
       3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
       ibrs_enhanced tpr_shadow vmmi flexpriority ept vpid ept_ad fsgsbase
       tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
       clwb intel_pt sha_ni xsaveopt xsavexc xgetbv1 xsaves split_lock_detect
       avx_vnni dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
       hwp_pkg_req hfi umip pku ospke waitpkg gfni vpclmulqdq tme rdpid movdiri
       movdir64b fsrm md_clear serialize pconfig arch_lbr flush_lll
       arch_capabilities

Virtualization: VT-x
L1d cache: 288 KiB (6 instances)
L1i cache: 192 KiB (6 instances)
L2 cache: 12 MiB (6 instances)
L3 cache: 18 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-11
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-11

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECSpeed®2017_fp_base = 82.5

SPECSpeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```
node 0 size: 64175 MB
node 0 free: 55721 MB
node distances:
node 0
0: 10

-----
9. /proc/meminfo
MemTotal: 65715428 kB

-----
10. who -r
run-level 3 Mar 28 10:06

-----
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user running

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load
lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=c7ea704b-969d-4a21-bb75-dacf025811fc
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 6.90 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

-----
15. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_fp_base = 82.5

SPECspeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```
vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio          20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness            60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP5

-----
19. Disk information
    SPEC is set to: /ic24u0
    Filesystem  Type  Size  Used Avail Use% Mounted on
    /dev/sda8    xfs  763G  29G  735G  4%  /

-----
20. /sys/devices/virtual/dmi/id
    Vendor: ASUSTeK COMPUTER INC.
    Product: RS300-E12-RS4
    Product Family: Server
    Serial: 865236000406

-----
21. dmidecode
    Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        1x SK Hynix HMCG88MEBEA081N 32 GB 2 rank 4800, configured at 4400
        1x SK Hynix HMCG88MEBEA084N 32 GB 2 rank 4800, configured at 4400
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECSpeed®2017_fp_base = 82.5

SPECSpeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 0502
BIOS Date: 12/28/2023
BIOS Revision: 5.2

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 607.cactubssn_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_fp_base = 82.5

SPECspeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-fno-standard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -fno-standard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECSpeed®2017_fp_base = 82.5

SPECSpeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast  
-ffast-math -futto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E12-RS4
(3.50 GHz, Intel Xeon E-2486)

SPECspeed®2017_fp_base = 82.5

SPECspeed®2017_fp_peak = 82.5

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

603.bwaves_s (continued):

-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p13-V1.2.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p13-V1.2.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-28 06:48:43-0400.

Report generated on 2024-04-24 14:31:44 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-24.