



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2024

Hardware Availability: Mar-2024

Software Availability: Mar-2024

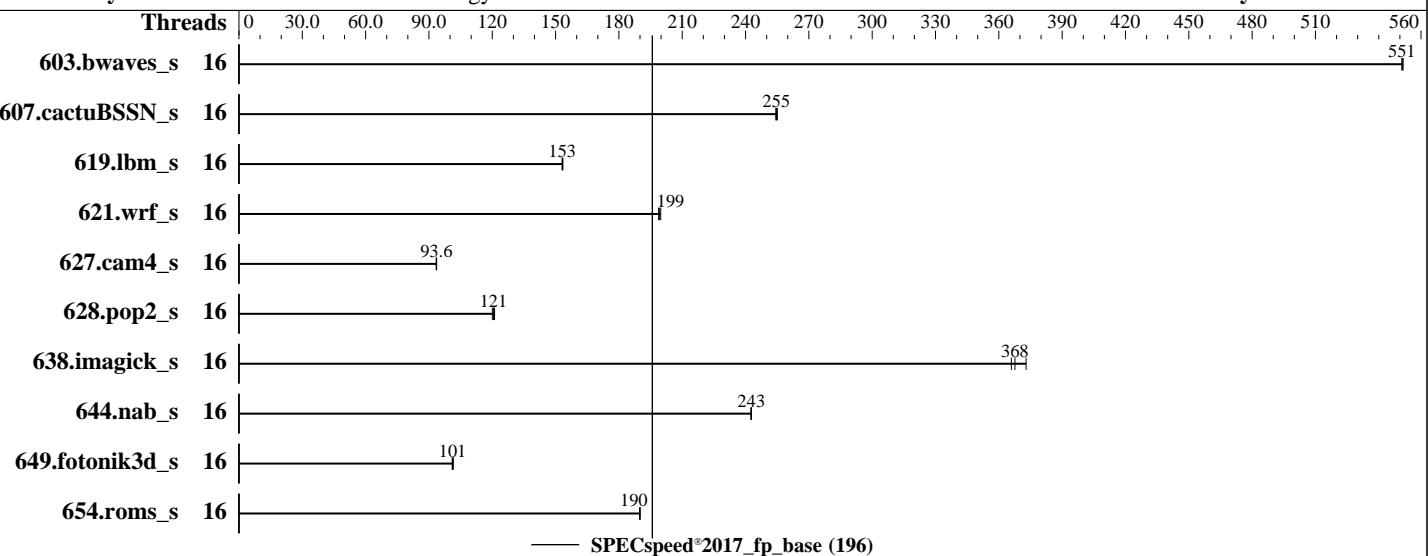

### Hardware

CPU Name: Intel Xeon Gold 6544Y  
Max MHz: 4100  
Nominal: 3600  
Enabled: 16 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 45 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
Storage: 1 x 480 GB M.2 SATA SSD  
Other: CPU Cooling: Air

### OS:

Red Hat Enterprise Linux 9.3 (Plow)

Kernel 5.14.0-362.8.1.el9\_3.x86\_64

C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;

Parallel: Yes

Firmware: Lenovo BIOS Version FNE113F 2.20 released Jan-2024

File System: xfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: Not Applicable

Other: jemalloc memory allocator V5.0.1

Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds
603.bwaves_s	16	107	552	107	551	<b>107</b>	<b>551</b>							
607.cactuBSSN_s	16	65.4	255	65.5	254	<b>65.5</b>	<b>255</b>							
619.lbm_s	16	<b>34.2</b>	<b>153</b>	34.1	153	34.2	153							
621.wrf_s	16	<b>66.4</b>	<b>199</b>	66.5	199	66.2	200							
627.cam4_s	16	<b>94.7</b>	<b>93.6</b>	94.6	93.6	94.9	93.4							
628.pop2_s	16	<b>98.4</b>	<b>121</b>	98.0	121	98.9	120							
638.imagick_s	16	39.4	366	<b>39.2</b>	<b>368</b>	38.7	373							
644.nab_s	16	72.0	243	<b>72.0</b>	<b>243</b>	72.1	242							
649.fotonik3d_s	16	<b>90.0</b>	<b>101</b>	90.3	101	89.8	102							
654.roms_s	16	83.0	190	82.8	190	<b>82.9</b>	<b>190</b>							
SPECspeed®2017_fp_base = 196														
SPECspeed®2017_fp_peak = Not Run														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.0.2/lib/intel64:/home/cpu2017-1.1.9-ic2024.0.2/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes

### BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

Hyper-Threading set to Disabled

Adjacent Cache Prefetch set to Disabled

AMP Prefetch set to Enable

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.0.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Mar 25 05:58:36 2024
```

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 252 (252-18.el9)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-362.8.1.el9_3.x86_64 #1 SMP PREEMPT_DYNAMIC Tue Oct 3 11:12:36 EDT 2023
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
05:58:36 up 3 min, 1 user, load average: 0.01, 0.02, 0.00
USER      TTY      LOGIN@    IDLE      JCPU      PCPU WHAT
root      tty1      05:57    12.00s  0.71s  0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time  (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

```
scheduling priority          (-e) 0
file size                  (blocks, -f) unlimited
pending signals             (-i) 2061868
max locked memory          (kbytes, -l) 64
max memory size            (kbytes, -m) unlimited
open files                 (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues       (bytes, -q) 819200
real-time priority          (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes          (-u) 2061868
virtual memory              (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

---

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=16 --tune base -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=16 --tune base --output_format all
  --define drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.102/templogs/preenv.fpspeed.102.0.log --lognum 102.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.0.2
```

---

### 6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) GOLD 6544Y
vendor_id       : GenuineIntel
cpu family     : 6
model          : 207
stepping        : 2
microcode       : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brsb
cpu cores      : 16
siblings        : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apic_ids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

---

### 7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                16
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

On-line CPU(s) list:

0-15

Vendor ID:

GenuineIntel

BIOS Vendor ID:

Intel(R) Corporation

Model name:

INTEL(R) XEON(R) GOLD 6544Y

BIOS Model name:

INTEL(R) XEON(R) GOLD 6544Y

CPU family:

6

Model:

207

Thread(s) per core:

1

Core(s) per socket:

16

Socket(s):

1

Stepping:

2

BogoMIPS:

7200.00

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq
dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsaves xgetbv1 xsaves cqmq_llc cqmq_occp_llc
cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16
wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi umip pkru ospke
waitpkg avx512_vbmi2 gfnii vaes vpclmulqdq avx512_vnmi avx512_bitalg tme
avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdir64b
enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
avx512_fp16 amx_tile amx_int8 flush_lld arch_capabilities
```

Virtualization:

VT-x

L1d cache:

768 KiB (16 instances)

L1i cache:

512 KiB (16 instances)

L2 cache:

32 MiB (16 instances)

L3 cache:

45 MiB (1 instance)

NUMA node(s):

1

NUMA node0 CPU(s):

0-15

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	45M	45M	15	Unified	3	49152	1	64

-----  
8. numactl --hardware

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 515506 MB
node 0 free: 514558 MB
node distances:
node 0
 0: 10
```

```
-----  
9. /proc/meminfo
MemTotal:      527878504 kB
```

```
-----  
10. who -r
run-level 3 Mar 25 05:55
```

```
-----  
11. Systemd service manager version: systemd 252 (252-18.el9)
Default Target     Status
multi-user         running
```

```
-----  
12. Services, from systemctl list-unit-files
STATE            UNIT FILES
enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited crond
                  dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
                  mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark
                  sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
enabled-runtime   systemd-remount-fs
disabled         canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                  console-getty cpupower debug-shell dnf-system-upgrade kvm_stat man-db-restart-cache-update
                  nftables pesgin rdisc rhcd rhsm-facts rpmdb-rebuild selinux-check-proper-disable
                  serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                  systemd-sysupdate-reboot
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-362.8.1.el9_3.x86_64
root=UUID=be3ee7bd-6dba-4efc-8d0a-4f4f123b4865
ro
resume=UUID=8de8c2d1-84ee-4c60-9038-a9elae2929c4
```

```
-----  
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

```
-----  
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

```
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag           always defer defer+madvise [madvise] never
    enabled          [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                  1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap          64
    pages_to_scan          4096
    scan_sleep_millisecs  10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.3 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.3 (Plow)
    system-release  Red Hat Enterprise Linux release 9.3 (Plow)

-----
19. Disk information
    SPEC is set to: /home/cpu2017-1.1.9-ic2024.0.2
    Filesystem      Type  Size  Used  Avail Use% Mounted on
    /dev/sda4       xfs   372G  40G  332G  11%  /home

-----
20. /sys/devices/virtual/dmi/id
    Vendor:          Lenovo
    Product:         ThinkSystem SD530 V3
    Product Family:  ThinkSystem
    Serial:          PASDVMK006

-----
21. dmidecode
    Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        7x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 5200
        1x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 5200
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

```
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
BIOS Version:     FNE113F-2.20
BIOS Date:        01/02/2024
BIOS Revision:    2.20
Firmware Revision: 1.10
```

## Compiler Version Notes

```
=====
C           | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C, Fortran | 607.cactubSSN_s(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran      | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran, C   | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD530 V3  
(3.60 GHz, Intel Xeon Gold 6544Y)

SPECspeed®2017\_fp\_base = 196

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-24 17:58:36-0400.

Report generated on 2024-04-24 14:32:43 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-24.