



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Date: Apr-2024

Test Sponsor: Fujitsu

Hardware Availability: Apr-2024

Tested by: Fujitsu

Software Availability: Dec-2023

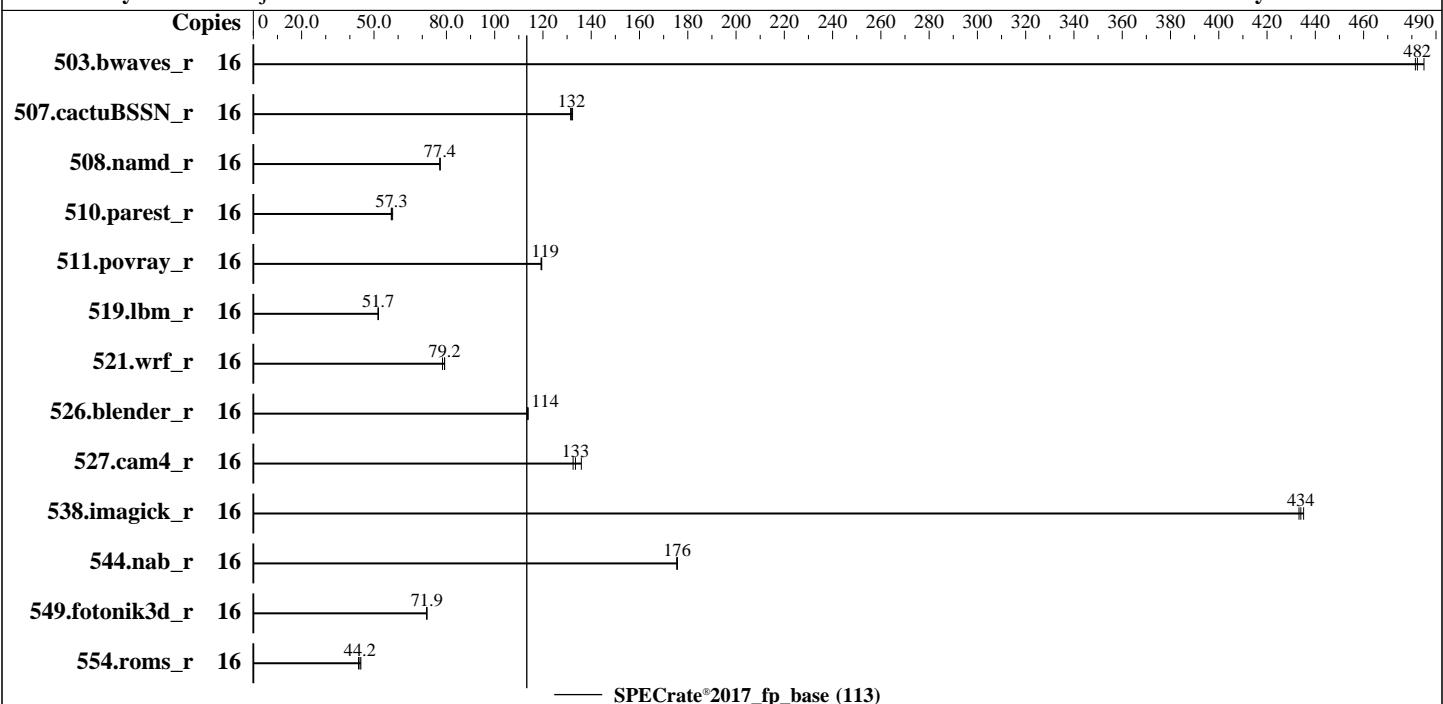

Hardware

CPU Name: Intel Xeon E-2488
Max MHz: 5600
Nominal: 3200
Enabled: 8 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 24 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)
Storage: 1 x SATA M.2 SSD, 960 GB
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default
Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Fujitsu BIOS Version V5.0.0.27 R1.5.0 for D4133-A1x. Released Jul-2024 tested as V5.0.0.27 R1.0.0 for D4133-A1x Mar-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2024

Test Sponsor: Fujitsu

Hardware Availability: Apr-2024

Tested by: Fujitsu

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	331	485	333	481	<u>333</u>	<u>482</u>							
507.cactuBSSN_r	16	153	132	<u>154</u>	<u>132</u>	154	131							
508.namd_r	16	<u>196</u>	<u>77.4</u>	196	77.4	197	77.3							
510.parest_r	16	725	57.7	732	57.2	<u>730</u>	<u>57.3</u>							
511.povray_r	16	<u>313</u>	<u>119</u>	313	119	313	119							
519.lbm_r	16	326	51.8	326	51.7	<u>326</u>	<u>51.7</u>							
521.wrf_r	16	<u>452</u>	<u>79.2</u>	452	79.2	457	78.4							
526.blender_r	16	214	114	<u>214</u>	<u>114</u>	214	114							
527.cam4_r	16	211	132	206	136	<u>210</u>	<u>133</u>							
538.imagick_r	16	91.4	435	91.8	433	<u>91.7</u>	<u>434</u>							
544.nab_r	16	<u>153</u>	<u>176</u>	153	176	153	175							
549.fotonik3d_r	16	<u>868</u>	<u>71.9</u>	868	71.9	867	71.9							
554.roms_r	16	583	43.6	571	44.6	<u>576</u>	<u>44.2</u>							

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2024

Test Sponsor: Fujitsu

Hardware Availability: Apr-2024

Tested by: Fujitsu

Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

C-State Auto Demotion = Disabled

CState Pre-Wake = Disabled

DMI Max Link Speed = Gen1

Fan Control = Full

Intel(R) Turbo Boost Max Technology 3.0 = Disabled

Total Memory Encryption = Disabled

```
Sysinfo program /home/Benchmark/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 1 07:04:13 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
07:04:13 up 1 day, 16:15, 2 users, load average: 4.76, 12.42, 14.55
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```
root      tty1      -          Sat14   40:07m  1.26s  0.53s -bash
root      tty2      -          Sat15   18:34m  0.03s  0.03s -bash
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 254564
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes       (-u) 254564
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 -c
  ic2024.0.2-lin-core-avx2-rate-20231213.cfg --define smt-on --define cores=8 --define physicallogical
  --define no-numa --tune base -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 --configfile
  ic2024.0.2-lin-core-avx2-rate-20231213.cfg --define smt-on --define cores=8 --define physicallogical
  --define no-numa --tune base --output_format all --define drop_caches --nopower --runmode rate --tune base
  --size reffrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) E E-2488
vendor_id       : GenuineIntel
cpu family     : 6
model          : 183
stepping        : 1
microcode       : 0x121
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss
cpu cores       : 8
siblings        : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0-15
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) E E-2488
CPU family: 6
Model: 183
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 1
Stepping: 1
CPU max MHz: 7200.0000
CPU min MHz: 800.0000
BogoMIPS: 6374.40
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
      abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
      ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
      tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
      clwb intel_pt sha_ni xsaveopt xsaved xgetbv1 xsaves split_lock_detect
      avx_vnni dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
      hwp_pkg_req hfi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
      movdiri movdir64b fsrm md_clear serialize pconfig arch_lbr flush_lll
      arch_capabilities
Virtualization: VT-x
L1d cache: 384 KiB (8 instances)
L1i cache: 256 KiB (8 instances)
L2 cache: 16 MiB (8 instances)
L3 cache: 24 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-15
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:
  NAME  ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K    384K    12 Data        1       64        1          64
  L1i     32K    256K     8 Instruction  1       64        1          64
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

Platform Notes (Continued)

L2	2M	16M	16 Unified	2	2048	1	64
L3	24M	24M	12 Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 63670 MB
node 0 free: 63122 MB
node distances:
node 0
0: 10

9. /proc/meminfo
MemTotal: 65198988 kB

10. who -r
run-level 3 Mar 30 14:49

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog libvirtd lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-haveged-switch-root ipmi ipmievd iscsi-init iscsid issue-add-ssh-keys kexec-load ksm kvm kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnservice systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcasd udisks2 virtinterfaced virtnetworkd virtnodeudev virtnwfilterd virtproxyd virtgemud virtsecretfd virtstoraged vncserver@ pcscd virtlockd virtlogd wickedd
indirect	

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=b3265823-ba87-4e42-87d0-25e99edb5ca6
splash=silent
resume=/dev/disk/by-uuid/a5855c9d-a4a0-4b74-baec-bd075bde416b
mitigations=auto
quiet
security=apparmor
crashkernel=309M,high
crashkernel=72M,low

14. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 6.90 GHz.  
        The governor "powersave" may decide which speed to use  
        within this range.
```

```
boost state support:  
    Supported: yes  
    Active: yes
```

```
-----  
15. sysctl  
    kernel.numa_balancing          0  
    kernel.randomize_va_space      2  
    vm.compaction_proactiveness   20  
    vm.dirty_background_bytes     0  
    vm.dirty_background_ratio     10  
    vm.dirty_bytes                0  
    vm.dirty_expire_centisecs    3000  
    vm.dirty_ratio                20  
    vm.dirty_writeback_centisecs  500  
    vm.dirtytime_expire_seconds   43200  
    vm.extfrag_threshold         500  
    vm.min_unmapped_ratio        1  
    vm.nr_hugepages              0  
    vm.nr_hugepages_mempolicy    0  
    vm.nr_overcommit_hugepages   0  
    vm.swappiness                 60  
    vm.watermark_boost_factor    15000  
    vm.watermark_scale_factor    10  
    vm.zone_reclaim_mode         0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
    defrag           always defer defer+madvise [madvise] never  
    enabled          [always] madvise never  
    hpage_pmd_size  2097152  
    shmem_enabled   always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs  60000  
    defrag               1  
    max_ptes_none       511  
    max_ptes_shared     256  
    max_ptes_swap       64  
    pages_to_scan       4096  
    scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
    From /etc/*-release /etc/*-version  
    os-release SUSE Linux Enterprise Server 15 SP5
```

```
-----  
19. Disk information  
    SPEC is set to: /home/Benchmark/speccpu  
    Filesystem      Type  Size  Used  Avail Use% Mounted on  
    /dev/sda3        xfs   791G  21G   771G   3%  /home
```

```
-----  
20. /sys/devices/virtual/dmi/id
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

Platform Notes (Continued)

Vendor: FUJITSU
Product: PRIMERGY RX1330 M6
Product Family: SERVER
Serial: xxxxxxxxxx

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Samsung M324R4GA3BB0-CQKOD 32 GB 2 rank 4800, configured at 4400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: FUJITSU // American Megatrends International, LLC.
BIOS Version: V5.0.0.27 R1.0.0 for D4133-Alx
BIOS Date: 03/13/2024
BIOS Revision: 1.0

Compiler Version Notes

=====

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

Base Portability Flags (Continued)

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M6,
Intel Xeon E-2488, 3.2 GHz

SPECrate®2017_fp_base = 113

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RPL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RPL-RevA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-31 18:04:12-0400.

Report generated on 2024-04-24 14:36:38 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-24.