



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221


Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

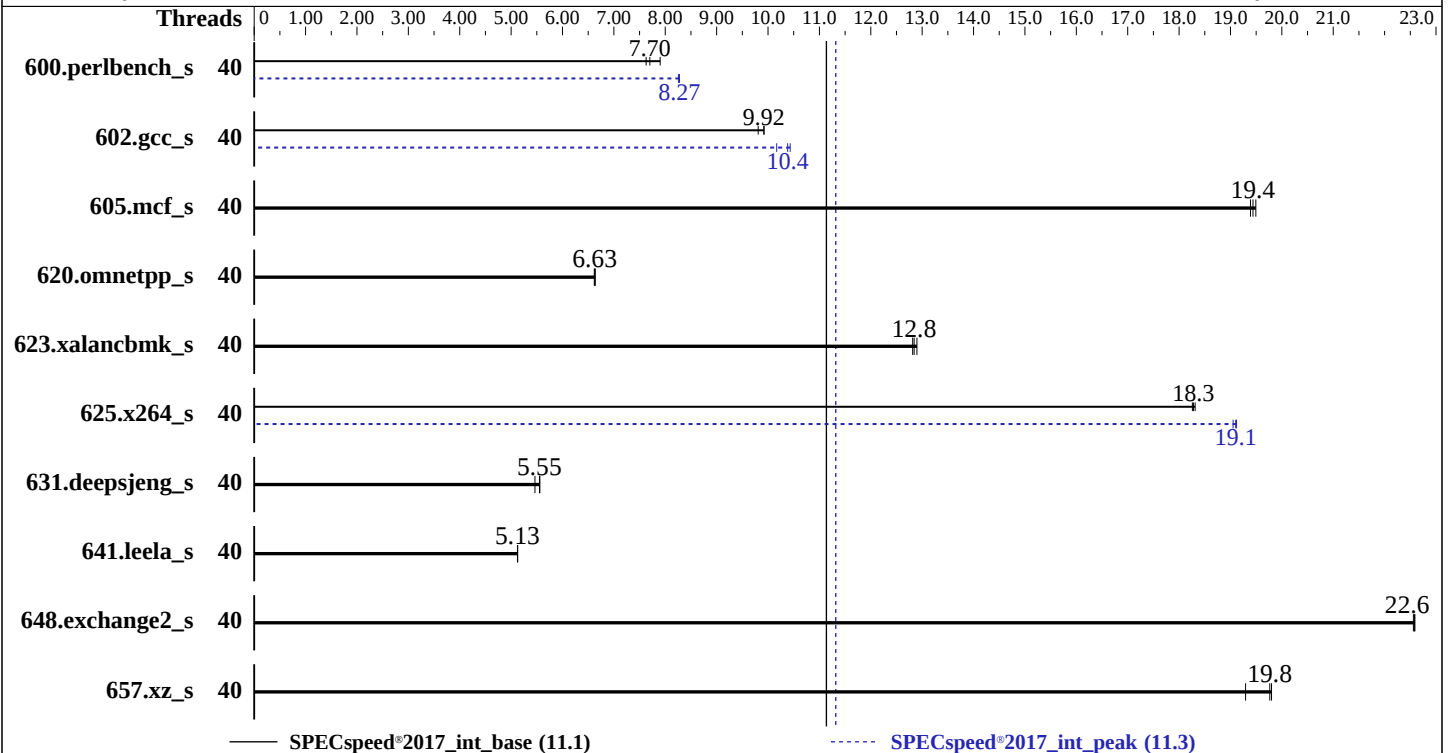

Hardware

CPU Name: Intel Xeon Silver 4410T
Max MHz: 4000
Nominal: 2700
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 26.25 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)
Storage: 960 GB SATA SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.5 LTS
6.8.0-49-generic
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version EG0.10.01 released Mar-2024
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the expense of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	40	<u>231</u>	<u>7.70</u>	233	7.63	225	7.90	40	215	8.26	<u>215</u>	<u>8.27</u>	214	8.28
602.gcc_s	40	406	9.81	401	9.92	<u>402</u>	<u>9.92</u>	40	392	10.2	382	10.4	<u>384</u>	<u>10.4</u>
605.mcf_s	40	243	19.4	242	19.5	<u>243</u>	<u>19.4</u>	40	243	19.4	242	19.5	<u>243</u>	<u>19.4</u>
620.omnetpp_s	40	246	6.62	<u>246</u>	<u>6.63</u>	246	6.64	40	246	6.62	<u>246</u>	<u>6.63</u>	246	6.64
623.xalancbmk_s	40	110	12.9	111	12.8	<u>110</u>	<u>12.8</u>	40	110	12.9	111	12.8	<u>110</u>	<u>12.8</u>
625.x264_s	40	<u>96.5</u>	<u>18.3</u>	96.3	18.3	96.6	18.3	40	92.3	19.1	<u>92.3</u>	<u>19.1</u>	92.6	19.1
631.deepsjeng_s	40	<u>258</u>	<u>5.55</u>	258	5.56	262	5.46	40	<u>258</u>	<u>5.55</u>	258	5.56	262	5.46
641.leela_s	40	333	5.12	<u>333</u>	<u>5.13</u>	333	5.13	40	333	5.12	<u>333</u>	<u>5.13</u>	333	5.13
648.exchange2_s	40	<u>130</u>	<u>22.6</u>	130	22.6	130	22.6	40	<u>130</u>	<u>22.6</u>	130	22.6	130	22.6
657.xz_s	40	312	19.8	<u>313</u>	<u>19.8</u>	320	19.3	40	312	19.8	<u>313</u>	<u>19.8</u>	320	19.3

SPECspeed®2017_int_base = 11.1

SPECspeed®2017_int_peak = 11.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/lib/ia32:/home/speccpu/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings

Enable SNC2 (2-Clusters)

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on intel Thu Feb 6 11:02:29 2025

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 249 (249.11-0ubuntu3.12)`
12. Failed units, from `systemctl list-units --state=failed`
13. Services, from `systemctl list-unit-files`
14. Linux kernel boot-time arguments, from `/proc/cmdline`
15. `cpupower frequency-info`
16. `sysctl`
17. `/sys/kernel/mm/transparent_hugepage`
18. `/sys/kernel/mm/transparent_hugepage/khugepaged`
19. OS release
20. Disk information
21. `/sys/devices/virtual/dmi/id`
22. `dmidecode`
23. BIOS

```
1. uname -a
Linux intel 6.8.0-49-generic #49~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Nov 6 17:42:15 UTC 2 x86_64 x86_64
x86_64 GNU/Linux
```

```
2. w
11:02:29 up 3 days, 17 min, 2 users, load average: 0.18, 0.29, 0.17
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
intel    :1        :1              Mon10    ?xdm?  2:05m  0.00s  /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
intel    pts/1    -               11:02   2.00s  0.90s  0.02s  sudo
./reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
```

```
3. Username
From environment variable $USER:  root
From the command 'logname':      intel
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 132062276
process            4126642
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Platform Notes (Continued)

nfiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0

5. sysinfo process ancestry

```
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
sh ./reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=20 --tune base,peak -o all --define
intspeedaffinity --define smt-on --define drop_caches intspeerd
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=20 --tune base,peak --output_format all
--define intspeerdaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak
--size refspeerd intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.041/temlogs/preenv.intspeerd.041.0.log --lognum 041.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Silver 4410T
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000603
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores       : 10
siblings        : 20
2 physical ids (chips)
40 processors (hardware threads)
physical id 0:  core ids 0-9
physical id 1:  core ids 0-9
physical id 0:  apicids 0-19
physical id 1:  apicids 128-147
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                40
On-line CPU(s) list:   0-39
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Silver 4410T
CPU family:            6
Model:                 143
Thread(s) per core:    2
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Platform Notes (Continued)

Core(s) per socket: 10
Socket(s): 2
Stepping: 8
CPU max MHz: 4000.0000
CPU min MHz: 800.0000
BogoMIPS: 5400.00
Flags: fpv vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities

Virtualization: VT-x
L1d cache: 960 KiB (20 instances)
L1i cache: 640 KiB (20 instances)
L2 cache: 40 MiB (20 instances)
L3 cache: 52.5 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-4,20-24
NUMA node1 CPU(s): 5-9,25-29
NUMA node2 CPU(s): 10-14,30-34
NUMA node3 CPU(s): 15-19,35-39
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	960K	12	Data	1	64	1	64
L1i	32K	640K	8	Instruction	1	64	1	64
L2	2M	40M	16	Unified	2	2048	1	64
L3	26.3M	52.5M	15	Unified	3	28672	1	64

8. numactl --hardware

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Platform Notes (Continued)

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-4,20-24
node 0 size: 257650 MB
node 0 free: 244789 MB
node 1 cpus: 5-9,25-29
node 1 size: 258044 MB
node 1 free: 249570 MB
node 2 cpus: 10-14,30-34
node 2 size: 258044 MB
node 2 free: 249249 MB
node 3 cpus: 15-19,35-39
node 3 size: 257997 MB
node 3 free: 248301 MB
node distances:
node    0    1    2    3
  0:   10   12   21   21
  1:   12   10   21   21
  2:   21   21   10   12
  3:   21   21   12   10
```

```
9. /proc/meminfo
   MemTotal:      1056498212 kB
```

```
10. who -r
    run-level 5 Feb 3 10:46
```

```
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
    Default Target    Status
    graphical         degraded
```

```
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
    * NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online
```

```
13. Services, from systemctl list-unit-files
    STATE    UNIT FILES
    enabled  ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
    accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups
    cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
    irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
    rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oond systemd-pstore
    systemd-resolved systemd-timesyncd teamviewerd thermald ua-reboot-cmds ubuntu-advantage
    udisks2 ufw unattended-upgrades wpa_supplicant
    enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
    disabled  acpid brltty console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@
    rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures
    systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysex
    systemd-time-wait-sync tlp upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
    wpa_supplicant@
    generated apport cpufrequtils loadcpufreq speech-dispatcher
    indirect  saned@ spice-vdagentd uuid
    masked    alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
    screen-cleanup sudo systemd-rfkill x11-common
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-49-generic
root=UUID=073562bb-1438-42b9-adfa-6a6f7f3d3559
ro
quiet
splash
vt.handoff=7
```

15. cpupower frequency-info

```
analyzing CPU 21:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer defer+madvice [madvice] never
enabled         always [madvice] never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

19. OS release

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Platform Notes (Continued)

From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.5 LTS

20. Disk information

SPEC is set to: /home/speccpu/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	879G	686G	149G	83%	/

21. /sys/devices/virtual/dmi/id

Vendor: Fusionstor
Product: Invento_i6000
Product Family: SG_Intel_EagleStream
Serial: HQ3110001BDA03CD0002

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x NO DIMM NO DIMM

16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800, configured at 4000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: EG0.10.01
BIOS Date: 03/22/2024
BIOS Revision: 5.32

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)  
      | 657.xz_s(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

```
=====  
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)  
      | 641.leela_s(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

```
=====  
Fortran | 648.exchange2_s(base, peak)  
=====
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl, -z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -w -std=c11 -m64 -Wl, -z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

SPECspeed®2017_int_base = 11.1

Invento i6000 (Intel Xeon Silver 4410T)

SPECspeed®2017_int_peak = 11.3

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Feb-2025

Hardware Availability: Dec-2022

Software Availability: Nov-2024

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-06 00:32:29-0500.

Report generated on 2025-04-22 12:00:02 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-22.