



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

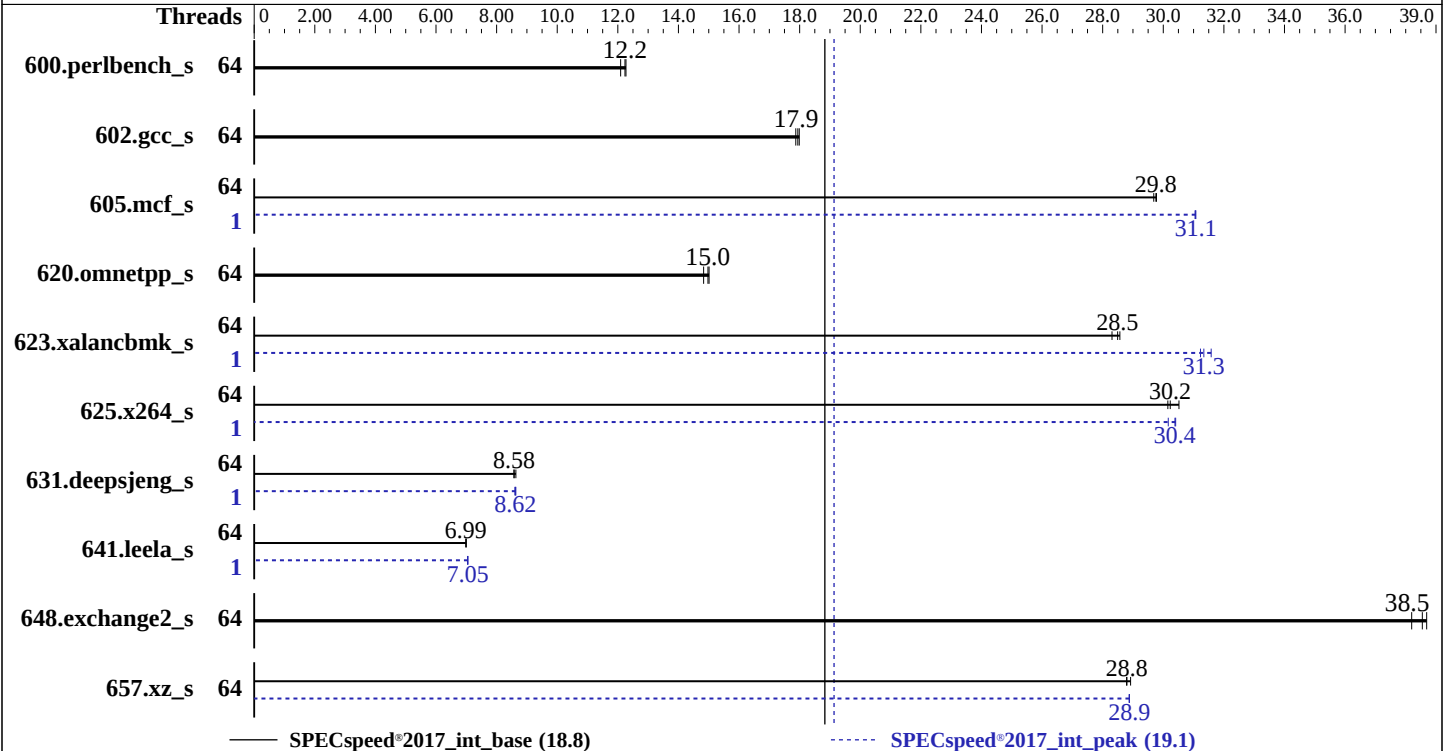

### Hardware

CPU Name: AMD EPYC 9335  
Max MHz: 4400  
Nominal: 3000  
Enabled: 64 cores, 2 chips  
Orderable: 2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 128 MB I+D on chip per chip,  
32 MB shared / 8 cores  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)  
Storage: 1 x 3.84 TB NVME SSD  
Other: CPU Cooling: DLC

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
Kernel 6.4.0-150600.21-default  
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
Parallel: Yes  
Firmware: Lenovo BIOS Version QGE139G 8.20 released Apr-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Results Table

| Benchmark       | Base    |             |             |             |             |            |             | Peak    |             |             |            |             |            |             |
|-----------------|---------|-------------|-------------|-------------|-------------|------------|-------------|---------|-------------|-------------|------------|-------------|------------|-------------|
|                 | Threads | Seconds     | Ratio       | Seconds     | Ratio       | Seconds    | Ratio       | Threads | Seconds     | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 600.perlbench_s | 64      | <b>145</b>  | <b>12.2</b> | 147         | 12.1        | 145        | 12.3        | 64      | <b>145</b>  | <b>12.2</b> | 147        | 12.1        | 145        | 12.3        |
| 602.gcc_s       | 64      | <b>222</b>  | <b>17.9</b> | 221         | 18.0        | 223        | 17.9        | 64      | <b>222</b>  | <b>17.9</b> | 221        | 18.0        | 223        | 17.9        |
| 605.mcf_s       | 64      | <b>159</b>  | <b>29.8</b> | 159         | 29.8        | 159        | 29.7        | 1       | <b>152</b>  | <b>31.1</b> | 152        | 31.0        | 152        | 31.1        |
| 620.omnetpp_s   | 64      | 109         | 15.0        | <b>109</b>  | <b>15.0</b> | 110        | 14.8        | 64      | 109         | 15.0        | <b>109</b> | <b>15.0</b> | 110        | 14.8        |
| 623.xalancbmk_s | 64      | 49.6        | 28.6        | <b>49.7</b> | <b>28.5</b> | 50.1       | 28.3        | 1       | <b>45.2</b> | <b>31.3</b> | 44.9       | 31.6        | 45.4       | 31.2        |
| 625.x264_s      | 64      | <b>58.4</b> | <b>30.2</b> | 57.8        | 30.5        | 58.5       | 30.2        | 1       | <b>58.1</b> | <b>30.4</b> | 58.0       | 30.4        | 58.5       | 30.2        |
| 631.deepsjeng_s | 64      | 166         | 8.64        | <b>167</b>  | <b>8.58</b> | 167        | 8.57        | 1       | 167         | 8.60        | 166        | 8.63        | <b>166</b> | <b>8.62</b> |
| 641.leela_s     | 64      | 244         | 7.00        | 244         | 6.99        | <b>244</b> | <b>6.99</b> | 1       | 242         | 7.05        | 242        | 7.04        | <b>242</b> | <b>7.05</b> |
| 648.exchange2_s | 64      | <b>76.3</b> | <b>38.5</b> | 76.0        | 38.7        | 77.0       | 38.2        | 64      | <b>76.3</b> | <b>38.5</b> | 76.0       | 38.7        | 77.0       | 38.2        |
| 657.xz_s        | 64      | <b>215</b>  | <b>28.8</b> | 215         | 28.8        | 214        | 28.9        | 64      | <b>214</b>  | <b>28.9</b> | 214        | 28.9        | 214        | 28.9        |

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

cpupower set to performance mode  
cpupower frequency-set -r -g performance  
To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-63"

LD\_LIBRARY\_PATH =

"/home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/amd\_speed\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/amd\_speed\_aocc500\_znver5\_A\_lib/lib32:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:

GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-63"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

P-State set to Enabled

NUMA Nodes per Socket set to NPS4

SMT Mode set to Disabled

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue May 13 07:10:02 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
07:10:02 up 2:41, 1 user, load average: 1.64, 4.33, 3.25  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 3094279  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 3094279  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeerd intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.275/temlogs/preenv.intspeerd.275.0.log --lognum 275.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9335 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002147
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55
physical id 1: core ids 0-7,16-23,32-39,48-55
physical id 0: apicids 0-7,16-23,32-39,48-55
physical id 1: apicids 64-71,80-87,96-103,112-119
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      64
On-line CPU(s) list:         0-63
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9335 32-Core Processor
BIOS Model name:             AMD EPYC 9335 32-Core Processor
BIOS CPU family:             107
CPU family:                  26
Model:                       2
Thread(s) per core:          1
Core(s) per socket:          32
Socket(s):                   2
Stepping:                    1
Frequency boost:              enabled
CPU(s) scaling MHz:          105%

Unknown CPU @ 3.0GHz
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

CPU max MHz: 3000.0000  
CPU min MHz: 1500.0000  
BogoMIPS: 6000.74  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good amd\_lbr\_v2 nopl nonstop\_tsc cpuid extd\_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb cat\_l3 cdp\_l3 hw\_pstate ssbd mba perfmon\_v2 ibrs ibpb stibp ibrs\_enhanced vmmcall fsgsbase tsc\_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local user\_shstk avx\_vnni avx512\_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd\_ppin cppc arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_vmsave\_vmload vgif x2avic v\_spec\_ctrl vnmi avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57 rdpid bus\_lock\_detect movdiri movdir64b overflow\_recov succor smca fsrm avx512\_vp2intersect flush\_lld debug\_swap  
AMD-V  
3 MiB (64 instances)  
2 MiB (64 instances)  
64 MiB (64 instances)  
256 MiB (8 instances)  
8  
0-7  
8-15  
16-23  
24-31  
32-39  
40-47  
48-55  
56-63  
Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 3M       | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 2M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 64M      | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 32M      | 256M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-7

node 0 size: 96347 MB

node 0 free: 96021 MB

node 1 cpus: 8-15

node 1 size: 96765 MB

node 1 free: 96529 MB

node 2 cpus: 16-23

node 2 size: 96765 MB

node 2 free: 96530 MB

node 3 cpus: 24-31

node 3 size: 96765 MB

node 3 free: 96191 MB

node 4 cpus: 32-39

node 4 size: 96765 MB

node 4 free: 96406 MB

node 5 cpus: 40-47

node 5 size: 96765 MB

node 5 free: 96460 MB

node 6 cpus: 48-55

node 6 size: 96727 MB

node 6 free: 96473 MB

node 7 cpus: 56-63

node 7 size: 96693 MB

node 7 free: 96404 MB

node distances:

| node | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  |
|------|----|----|----|----|----|----|----|----|
| 0:   | 10 | 12 | 12 | 12 | 32 | 32 | 32 | 32 |
| 1:   | 12 | 10 | 12 | 12 | 32 | 32 | 32 | 32 |
| 2:   | 12 | 12 | 10 | 12 | 32 | 32 | 32 | 32 |
| 3:   | 12 | 12 | 12 | 10 | 32 | 32 | 32 | 32 |
| 4:   | 32 | 32 | 32 | 32 | 10 | 12 | 12 | 12 |
| 5:   | 32 | 32 | 32 | 32 | 12 | 10 | 12 | 12 |
| 6:   | 32 | 32 | 32 | 32 | 12 | 12 | 10 | 12 |
| 7:   | 32 | 32 | 32 | 32 | 12 | 12 | 12 | 10 |

9. /proc/meminfo

MemTotal: 792162464 kB

10. who -r

run-level 3 May 13 04:29

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator  
kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-fc-autoconnect postfix  
purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4  
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

disabled      autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
                 chrynd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
                 firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdt issue-add-ssh-keys  
                 kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd  
                 serial-getty@ smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures  
                 systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync  
                 systemd-timesyncd  
indirect      systemd-userdbd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=9444ad63-6600-41de-9db7-026811eaf134  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

-----  
14. cpupower frequency-info  
analyzing CPU 40:  
current policy: frequency should be within 1.50 GHz and 3.00 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

-----  
15. sysctl  
kernel.numa\_balancing                    1  
kernel.randomize\_va\_space               0  
vm.compaction\_proactiveness             20  
vm.dirty\_background\_bytes                0  
vm.dirty\_background\_ratio                10  
vm.dirty\_bytes                            0  
vm.dirty\_expire\_centisecs                3000  
vm.dirty\_ratio                            8  
vm.dirty\_writeback\_centisecs             500  
vm.dirtytime\_expire\_seconds              43200  
vm.extfrag\_threshold                     500  
vm.min\_unmapped\_ratio                    1  
vm.nr\_hugepages                           0  
vm.nr\_hugepages\_mempolicy                0  
vm.nr\_overcommit\_hugepages               0  
vm.swappiness                             1  
vm.watermark\_boost\_factor                15000  
vm.watermark\_scale\_factor                10  
vm.zone\_reclaim\_mode                     1

-----  
16. /sys/kernel/mm/transparent\_hugepage  
defrag                    [always] defer defer+madvise madvise never  
enabled                   [always] madvise never  
hpage\_pmd\_size           2097152  
shmem\_enabled            always within\_size advise [never] deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs    60000

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Platform Notes (Continued)

```
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs   3.5T  97G  3.4T   3% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SD665 V3
Product Family: ThinkSystem
Serial:      1234567890
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  12x SK Hynix HMC88AHB471N 32 GB 2 rank 6400
  2x SK Hynix HMC88AHB472N 32 GB 2 rank 6400
  10x SK Hynix HMC88AHB478N 32 GB 2 rank 6400
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:      Lenovo
  BIOS Version:     QGE139G-8.20
  BIOS Date:        04/28/2025
  BIOS Revision:    8.20
  Firmware Revision: 13.10
-----
```

## Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
-----
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Compiler Version Notes (Continued)

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

-----  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

=====

Fortran | 648.exchange2\_s(base, peak)  
-----  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP  
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm  
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

625.x264\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

657.xz\_s: Same as 625.x264\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIB -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIB -ffast-math -fopenmp  
-flto -DSPEC\_OPENMP -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=100 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela\_s: Same as 631.deepsjeng\_s

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD665 V3  
(3.00 GHz, AMD EPYC 9335)

SPECspeed®2017\_int\_base = 18.8

SPECspeed®2017\_int\_peak = 19.1

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2025

**Hardware Availability:** Jul-2025

**Software Availability:** Oct-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-F.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-F.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-12 19:10:01-0400.

Report generated on 2025-06-03 15:44:33 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-03.