




# CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

## Hewlett-Packard Company AlphaServer ES80 7/1000

**SPECint2000 =** 761  
**SPECint\_base2000 =** 689

SPEC license #: 2 | Tested by: HP | Test date: Dec-2002 | Hardware Avail: Jan-2003 | Software Avail: Jan-2003

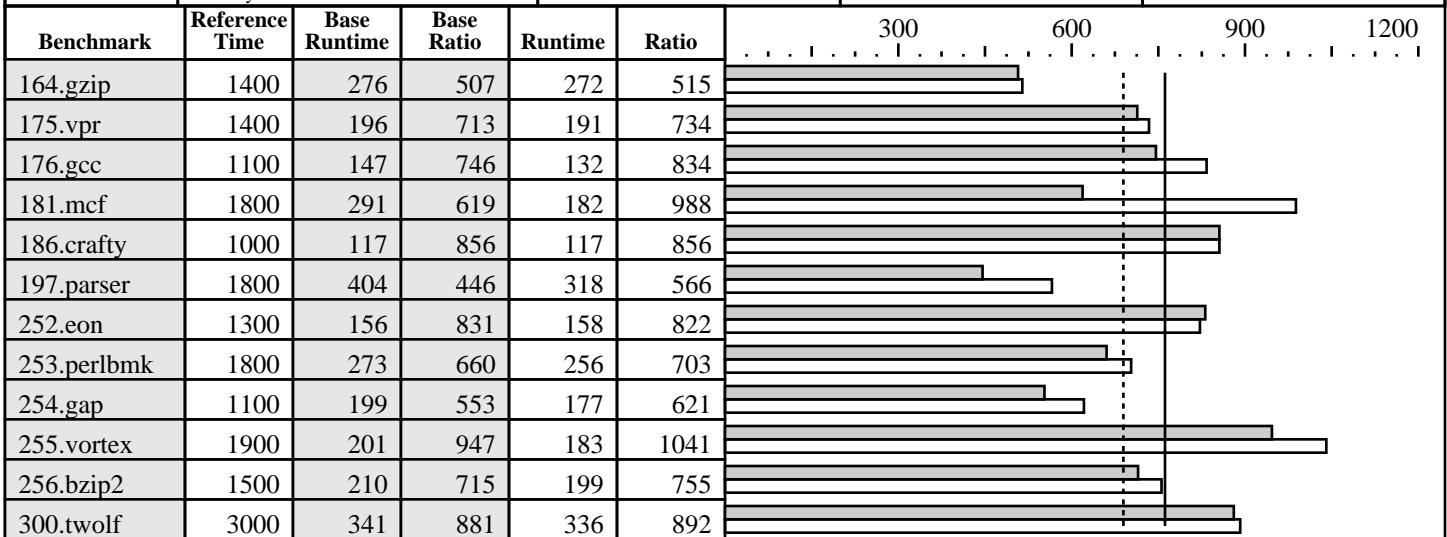

### Hardware

CPU: Alpha 21364  
CPU MHz: 1000  
FPU: Integrated  
CPU(s) enabled: 1 core, 1 chip, 1 core/chip  
CPU(s) orderable: 2 to 8  
Parallel: No  
Primary Cache: 64KB(I)+64KB(D) on chip  
Secondary Cache: 1.75MB on chip per CPU  
L3 Cache: None  
Other Cache: None  
Memory: 4GB  
Disk Subsystem:  
Other Hardware: None

### Software

Operating System: Tru64 UNIX V5.1B (Rev. 2650)  
+IPK  
Compiler: Compaq C V6.5-011-48C5K  
Program Analysis Tools V2.0  
Spike V5.2 (506A)  
Compaq C++ V6.5-028  
File System: ufs  
System State: Multi-user

### Notes/Tuning Information

Baseline C : cc -arch ev7 -fast +CFB ONESTEP  
C++: cxx -arch ev7 -O2 ONESTEP

#### Peak:

The following use: -g3 -arch ev7 ONESTEP  
175.vpr 181.mcf 197.parser 253.perlbench

The following use: -g3 -arch ev6 ONESTEP  
164.gzip 176.gcc 254.gap 255.vortex 256.bzip2 300.twolf

#### Individual benchmark tuning:

```

164.gzip: -fast -O4 -non_shared +CFB
175.vpr: -fast -O4 -assume restricted_pointers +CFB
176.gcc: -fast -O4 -xtaso_short -all -ldensemalloc -none
          +CFB +IFB
181.mcf: -fast -xtaso_short +CFB +IFB +PFB
186.crafty: same as base
197.parser: -fast -O4 -xtaso_short -non_shared +CFB
252.eon: -arch ev7 -O2 -all -ldensemalloc -none
253.perlbench: -fast -non_shared +CFB +IFB

```



# CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company  
AlphaServer ES80 7/1000

SPECint2000 = 761  
SPECint\_base2000 = 689

SPEC license #: 2

Tested by: HP

Test date:

Dec-2002

Hardware Avail:

Jan-2003

Software Avail:

Jan-2003

## Notes/Tuning Information (Continued)

```
254.gap: -fast -O4 -non_shared +CFB +IFB +PFB
255.vortex: -fast -non_shared +CFB +IFB
256.bzip2: -fast -O4 -non_shared +CFB
300.twolf: -fast -O4
           -ldensemalloc -non_shared +CFB +IFB
```

Most benchmarks are built using one or more types of profile-driven feedback. The types used are designated by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using feedback from a training run. These commands are done before the first compile (in phase "fdo\_pre0"):

```
mkdir /tmp/pp
rm -f /tmp/pp/${baseexe}*
```

and these flags are added to the first and second compiles:

```
PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
PASS2_CFLAGS = -prof_use      -prof_dir /tmp/pp
```

(Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer Spike, using feedback from a training run. These commands are used (in phase "fdo\_postN"):

```
mv ${baseexe} oldexe
spike oldexe -feedback oldexe -o ${baseexe}
```

+PFB: Prefetches are improved by the post-link-time optimizer Spike, using feedback from a training run. These commands are used (in phase "fdo\_post\_makeN"):

```
rm -f *Counts*
mv ${baseexe} oldexe
pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
mv oldexe.pixie ${baseexe}
```

A training run is carried out (in phase "fdo\_runN"), and then this command (in phase "fdo\_postN"):

```
spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}
```

When Spike is used for both Icache and Prefetch improvements, only one spike command is actually issued, with the Icache options followed by the Prefetch options.

Portability: gcc: -Dalloca=\_\_builtin\_alloca; crafty: -DALPHA  
perlbench: -DSPEC\_CPU2000\_DUNIX; vortex: -DSPEC\_CPU2000\_LP64  
gap: -DSYS\_HAS\_CALLOC\_PROTO -DSYS\_IS\_BSD -DSYS\_HAS\_IOCTL\_PROTO  
-DSPEC\_CPU2000\_LP64

Information on UNIX V5.1B Patches can be found at  
<http://ftp1.service.digital.com/public/unix/v5.1b/>



# CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company  
AlphaServer ES80 7/1000

SPECint2000 = 761  
SPECint\_base2000 = 689

SPEC license #: 2

Tested by:

HP

Test date:

Dec-2002

Hardware Avail:

Jan-2003

Software Avail:

Jan-2003

## Notes/Tuning Information (Continued)

vm:

```
vm_bigpg_enabled = 1
vm_bigpg_thresh=16
vm_swap_eager = 0
```

proc:

```
max_per_proc_address_space = 0x400000000000
max_per_proc_data_size = 0x400000000000
max_per_proc_stack_size = 0x400000000000
max_proc_per_user = 2048
max_threads_per_user = 0
maxusers = 16384
per_proc_address_space = 0x400000000000
per_proc_data_size = 0x400000000000
per_proc_stack_size = 0x400000000000
```

In the ES80, there are two cpus per shelf. Each cpu has its own 4GB of memory. Neither of the cpus can be physically removed. For 1 cpu results measured on a 2 cpu system, one cpu was turned off at boot time using the /etc/sysconfigtab setting "cpu\_enabled\_mask=0". The cpu's 4GB of memory was also physically removed.