




CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V40z

SPECint_rate2000 = 20.2
SPECint_rate_base2000 = 18.1

SPEC license #: 6 Tested by: Sun Microsystems, Santa Clara Test date: Feb-2005 Hardware Avail: Apr-2005 Software Avail: Jan-2005

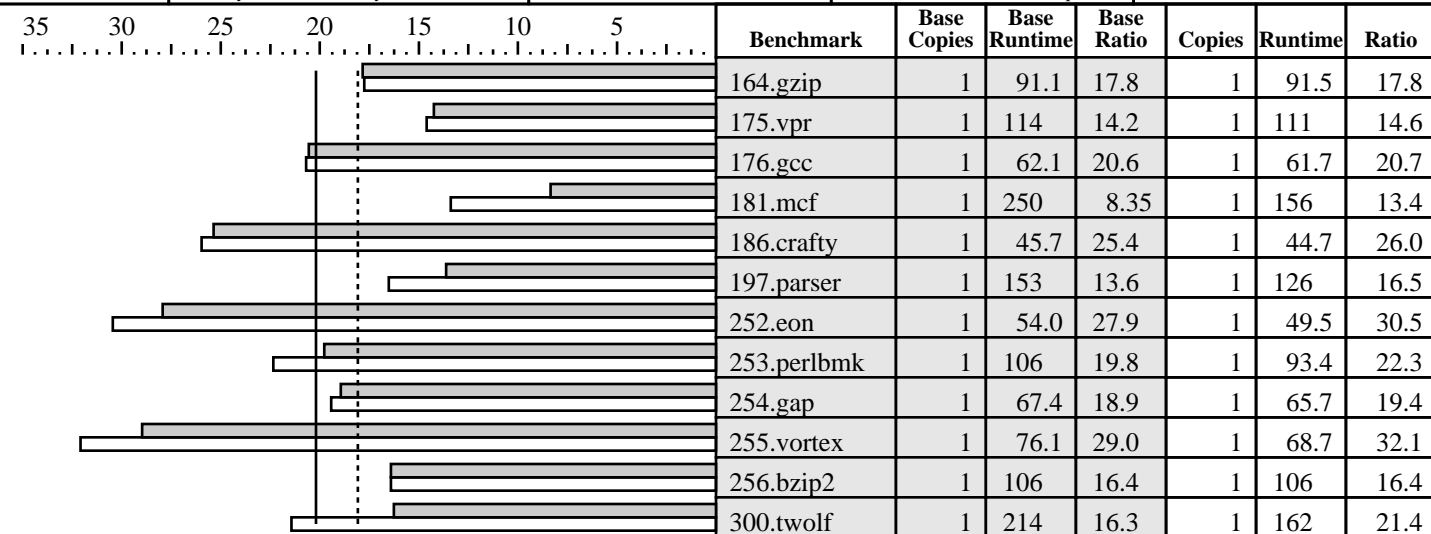

Hardware

CPU: AMD Opteron (TM) 852
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 1 core/chip
 CPU(s) orderable: 1,2,4
 Parallel: No
 Primary Cache: 64KBI + 64KBD on chip
 Secondary Cache: 1024KB (I+D) on chip
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 4GB (4x1GB, PC3200 CL3 DDR)
 Disk Subsystem: SCSI, 73GB, 10K RPM
 Other Hardware: None

Software

Operating System: SUSE LINUX Enterprise Server 9
 Compiler: PathScale EKOPath Compiler Suite, Release 2.0
 File System: Linux/ext3
 System State: Multi-user, Run level 3

Notes/Tuning Information

+FDO: PASS1= -fb_create fbdata PASS2= -fb_opt fbdata

Baseline optimization flags:

C programs: -Ofast +FDO
 C++ programs: -Ofast +FDO

Portability Flags and Alternate Source:

176.gcc : srcalt=64bitgcc
 186.crafty : -DLINUX_i386
 252.eon : -DHAS_ERRLIST -DSPEC_CPU2000_LP64 srcalt=fmax_errno
 253.perlbnk : -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
 -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
 254.gap : -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
 -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
 -DSPEC_CPU2000_LP64
 255.vortex : -DSPEC_CPU2000_LP64

Peak Tuning:

164.gzip : -O3 -ipa -m3dnow -WOPT:val=0 +FDO



CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V40z

SPECint_rate2000 = 20.2
SPECint_rate_base2000 = 18.1

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Feb-2005 | Hardware Avail: Apr-2005 | Software Avail: Jan-2005

Notes/Tuning Information (Continued)

```
175.vpr      : -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000 -INLINE:aggressive=on
              -IPA:space=300:plimit=10000:callee_limit=5000:linear=on +FDO
176.gcc      : -O3 -ipa -OPT:goto=off +FDO
181.mcf      : -O3 -ipa -IPA:field_reorder=on -m32 +FDO
186.crafty   : -O3 -OPT:goto=off +FDO
197.parser   : -O3 -ipa -m32 -IPA:ctype=on +FDO
252.eon      : -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -OPT:treeheight=on
              -TENV:X=4:frame_pointer=off -fno-exceptions
              -LNO:fu=10:full_unroll_outer=on -IPA:plimit=4000 +FDO
253.perlbmk  : -Ofast -OPT:transform_to_memlib=off -IPA:plimit=10000 +FDO
254.gap      : -Ofast -WOPT:aggstr=0 +FDO
255.vortex   : -Ofast -OPT:goto=off -IPA:plimit=1800 -CG:p2align=on +FDO
256.bzip2    : basepeak = true
300.twolf    : -O2 -CG:gcm=off:p2align_freq=100000
              -OPT:Ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
              -WOPT:mem_opnds=on -m32 +FDO
```

Note: The config file requested the vortex "closed_files" srcalt, but that srcalt was not in fact installed, so it was not used.
Default BIOS setting was used; Only one CPU was present on the system