



CINT2000 Result


Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro H8DS8 Motherboard

SPECint_rate2000 = 73.0

SPECint_rate_base2000 = 68.7

SPEC license #01176 | Tested by: Supermicro | Test date: Oct-2005 | Hardware Avail: Oct-2005 | Software Avail: Apr-2004

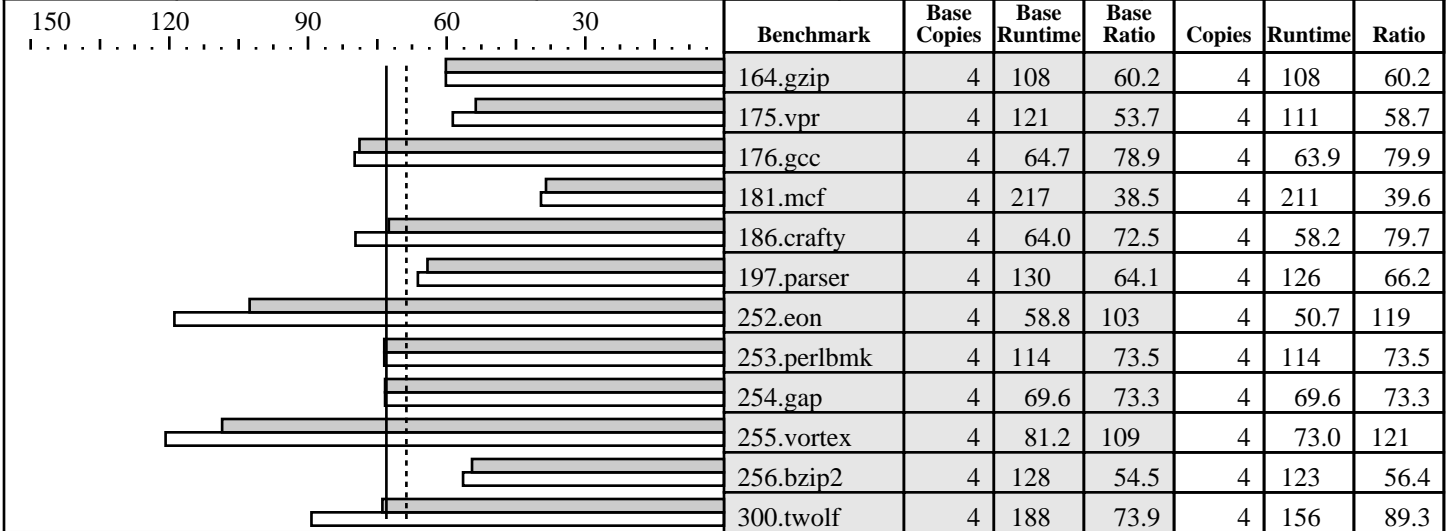

Hardware

CPU: AMD Opteron (TM) 280
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2
 Parallel: no
 Primary Cache: 64KBI + 64KBD per core on chip
 Secondary Cache: 1024KB (I+D) per core on chip
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 4x Kingston 2GB, Registered, ECC, DDR400, CL3
 Disk Subsystem: 1X Hitachi SATA 400 GB 7200RPM
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition w/ SP1
 Compiler: Intel C++ 8.0 build 20040415Z for IA32
 Microsoft Visual Studio .NET 7.0.9466 (libraries)
 MicroQuill Smartheap Library 7.0
 File System: NTFS
 System State: default

Notes/Tuning Information

shlw32M.lib is the SmartHeap library V7.0 from MicroQuill www.microquill.com

+FDO: PASS1=-Qprof_gen PASS2=-Qprof_use

Portability:

176.gcc: -Dalloca=_alloca /F10000000

186.crafty: -DNT_i386

253.perlbnk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT

254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Baseline C: -fast -arch:SSE2 -Oi- +FDO

Baseline C++: -fast -arch:SSE2 -GX -GR

Peak Tuning:

164.gzip: basepeak=yes

175.vpr: -fast -arch:SSE2 +FDO

-Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500

176.gcc: -fast -arch:SSE2 -Oi- -Qunroll3 +FDO

181.mcf: -fast -QaxN +FDO

186.crafty: -fast -arch:SSE2 +FDO

197.parser: -arch:SSE2 -Oi- -Qipo +FDO

252.eon: -fast -arch:SSE2 -Qansi_alias +FDO

-Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500

253.perlbnk: basepeak=yes

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org>



CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro
H8DS8 Motherboard

SPECint_rate2000 = 73.0
SPECint_rate_base2000 = 68.7

SPEC license #01176 | Tested by: Supermicro | Test date: Oct-2005 | Hardware Avail: Oct-2005 | Software Avail: Apr-2004

Notes/Tuning Information (Continued)

```
254.gap:      basepeak=yes
255.vortex:   -fast -arch:SSE -Oi- +FDO shlW32M.lib
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
256.bzip2:    -fast -Qunroll2
300.twolf:    -fast -arch:SSE2 -Qunroll3 -Qansi_alias +FDO shlW32M.lib
The system under test can be built with an ATX 500W power supply
```