



CINT2000 Result


Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation
IBM System p5 595 (2300 MHz, 64 CPU)

SPECint_rate2000 = 1513
SPECint_rate_base2000 = 1488

SPEC license #: 11 | Tested by: IBM Austin | Test date: Jun-2006 | Hardware Avail: Aug-2006 | Software Avail: Aug-2006

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.zip	128	210	989	128	215	966
175.vpr	128	167	1242	128	167	1242
176.gcc	128	96.0	1701	128	96.0	1701
181.mcf	128	127	2102	128	126	2127
186.crafty	128	127	1173	128	106	1397
197.parser	128	185	1441	128	187	1428
252.eon	128	109	1764	128	109	1776
253.perlbnk	128	229	1165	128	237	1130
254.gap	128	112	1464	128	112	1459
255.vortex	128	120	2347	128	116	2437
256.bzip2	128	137	1620	128	132	1687
300.twolf	128	322	1384	128	322	1385

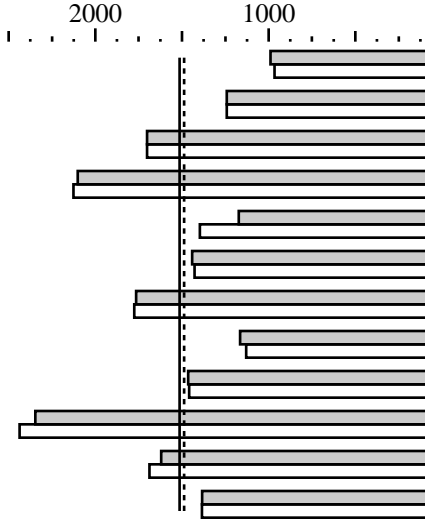

Hardware

CPU: POWER5+
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 64 cores, 32 chips, 2 cores/chip (SMT on)
 CPU(s) orderable: 16,32,48,64 cores
 Parallel: No
 Primary Cache: 64 KB I + 32 KB D on chip per core
 Secondary Cache: 1920 KB I+D on chip per chip
 L3 Cache: 36 MB I+D off chip per chip, 32 chips per SUT
 Other Cache: None
 Memory: 256 GB (64x4 GB)
 Disk Subsystem: 2x73GB SCSI, 15K RPM
 Other Hardware: None

Software

Operating System: AIX 5L V5.3
 Compiler: XL C/C++ Enterprise Edition Version 8.0 for AIX
 XL Fortran Enterprise Edition Version 10.1 for AIX
 Other Software: ESSL 4.2.0.4
 File System: AIX/JFS2
 System State: Multi-user

Notes/Tuning Information

Portability Flags:

```
176.gcc: -ma -DHOST_WORDS_BIG_ENDIAN
186.crafty: -DAIX
253.perlbnk: -DSPEC_CPU2000_AIX
254.gap: -DSYS_IS_BSD -DSYS_STRING_H
          -DSYS_HAS_MALLOC_PROTO -DSYS_HAS_CALLOC_PROTO
300.twolf: -DHAVE_SIGNED_CHAR
```

Base Optimization Flags:

```
C: -qpdf1/pdf2
   -O5 -blpdata -D_ILS_MACROS
C++: -qpdf1/pdf2
      -O4 -qalign=natural
```

Peak Optimization Flags

```
164.zip: -qpdf1/pdf2
         -O4 -qfdpr -blpdata
         fdpr -q -O3
175.vpr: basepeak=1
176.gcc: basepeak=1
```



CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation
IBM System p5 595 (2300 MHz, 64 CPU)

SPECint_rate2000 = 1513
SPECint_rate_base2000 = 1488

SPEC license #: 11 | Tested by: IBM Austin | Test date: Jun-2006 | Hardware Avail: Aug-2006 | Software Avail: Aug-2006

Notes/Tuning Information (Continued)

```

181.mcf:      -qpdf1/pdf2
              -O5 -blpdata -qalign=natural -qhot=arraypad -qfdpr -Q -qmaxmem=-1
              fdpr -q -O3
186.crafty:   -qpdf1/pdf2
              -O4 -qalign=natural -q64 -lhmu -blpdata
197.parser:   -qpdf1/pdf2
              -O4 -qfdpr -D_ILS_MACROS -blpdata
              fdpr -q -O3
252.eon:      -qpdf1/pdf2
              -O4 -qarch=pwr4 -qtune=pwr4 -qalign=natural
253.perlbnk:  -qpdf1/pdf2
              -O4 -qarch=pwr4 -qtune=pwr4 -qalign=natural -blpdata -lhmu
254.gap:      -qpdf1/pdf2
              -O4 -qarch=pwr4 -qtune=pwr4 -qalign=natural -blpdata
255.vortex:   -qpdf1/pdf2
              -O4 -qfdpr -lhmu -blpdata
              fdpr -q -O3
256.bzip2:    -qpdf1/pdf2
              -O5 -qfdpr -blpdata
              fdpr -q -O3
300.twolf:    -O5 -qfdpr -blpdata
              fdpr -q -O3

```

The installed OS level is AIX 5L for POWER Version 5.3 with the 5300-05 Recommended Technology Level.
 The installed C/C++ compiler is XL C/C++ Enterprise Edition Version 8.0 for AIX with the March 2006 PTF.
 The installed Fortran copiler is XL Fortran Enterprise Edition Version 10.1 with the May 2006 AIX PTF.

SMT: Acronym for "Simultaneous Multi-Threading". A processor technology that allows the simultaneous execution of multiple thread contexts within a single processor core. (Enabled by default)

SUT: Acronym for "System Under Test"

PTF: IBM identifier for "Program Fix Level"

```

Extended C:   IBM XL C for AIX invoked as cc
ANSI C89:     IBM XL C for AIX invoked as xlc
C++:         IBM XL C for AIX invoked as xlc

```

ulimits set to unlimited.

Large page mode and memory affinity were set as follows:

```

vmo -r -o lpgg_regions=12800 -o lpgg_size=16777216
chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
bosboot -aD
shutdown -rF
export MEMORY_AFFINITY=MCM

```

The following config-file entry was used to assign each benchmark process to a core:

```
submit = bindprocessor \$\$ \$SPECUSERNUM; $command
```

The "bindprocessor" AIX command binds a process to a CPU core.