



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation


Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7130M, 3.20 GHz

SPECfp_rate2000 = 38.4

SPECfp_rate_base2000 = 38.4

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Sep-2006 | Hardware Avail: Aug-2006 | Software Avail: Feb-2006

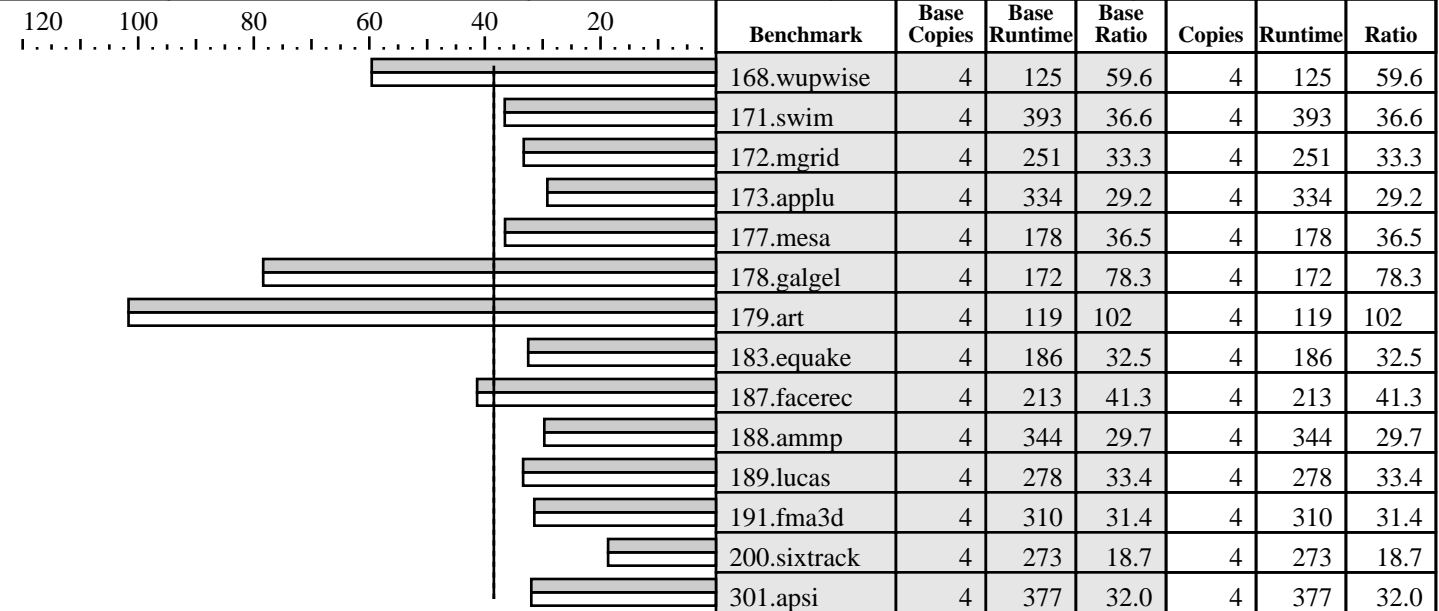

Hardware

CPU: Intel Xeon processor 7130M (3.20 GHz, 2x1MB L2, 8MB L3, 800 MHz system bus)
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip (Hyper-Threading Technology enabled)
 CPU(s) orderable: 1,2,4 chips
 Parallel: No
 Primary Cache: 12k micro-ops(I) + 16KB(D) on chip, per core
 Secondary Cache: 1024KB(I+D) on chip, per core
 L3 Cache: 8MB on chip, per chip
 Other Cache: N/A
 Memory: 16x1GB DDRII-RAM PC2-3200R (CAS 3-3-3)
 Disk Subsystem: Fujitsu MAS3367NC (SCSI, 15krpm, 36GB)
 Other Hardware: none

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 9 with SP3
 Kernel 2.6.5-7.244-smp on an x86_64
 Compiler: Intel C++ and Fortran Compiler 9.0 for EM64T
 Build 20060120 (for 64-bit applications)
 File System: ext3
 System State: Multi-user run level 3

Notes/Tuning Information

GENERAL

+FDO implies feedback-directed optimization
 PASS1: -prof_gen PASS2: -prof_use

Optimization flags

ONESTEP=yes set for all benchmarks

Portability flags

-DSPEC_CPU2000_LP64 applied to all benchmarks
 178.galgel: -FI for fixed-format Fortran

Base tuning flags

for Fortran and C programs: -fast +FDO

Peak tuning flags

same as baseline (basepeak=true set globally)



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7130M, 3.20 GHz

SPECfp_rate2000 = 38.4

SPECfp_rate_base2000 = 38.4

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Sep-2006 | Hardware Avail: Aug-2006 | Software Avail: Feb-2006

Notes/Tuning Information (Continued)

The system bus runs at 800 MHz

This result was measured with 64-bit binaries using the 64-bit version of the operating system.

This result was measured on the PRIMERGY TX600 S3. The PRIMERGY TX600 S3 and the PRIMERGY RX600 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>