



SPEC ACCEL™ ACC Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Lenovo

(Test Sponsor: Indiana University)

Intel Xeon E5-2680 v3

Lenovo NeXtScale nx360 M5

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 1.71

ACCEL license: 3440A


Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2017

Hardware Availability: Sep-2014

Software Availability: Mar-2017

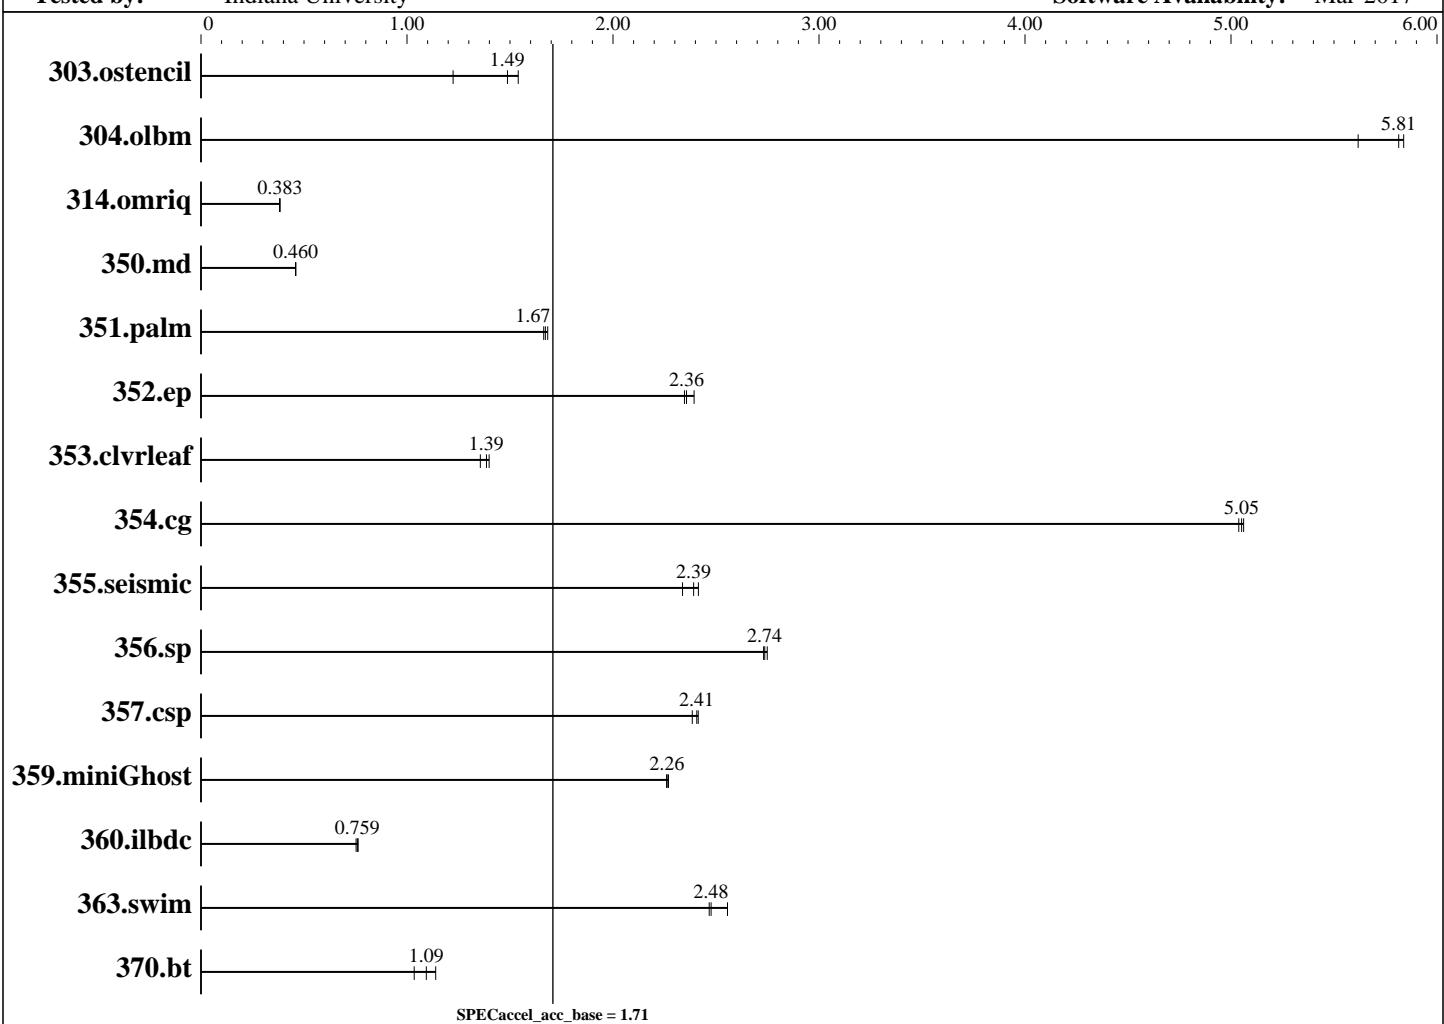

Hardware

CPU Name: Intel Xeon E5-2680 v3
 CPU Characteristics: Intel Turbo Boost Technology on,
 Hyper-threading off.
 CPU MHz: 2500
 CPU MHz Maximum: 3300
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1-2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip

Accelerator

Accel Model Name: Intel Xeon E5-2680 v3
 Accel Vendor: Intel
 Accel Name: Intel Xeon E5-2680 v3
 Type of Accel: CPU
 Accel Connection: N/A
 Does Accel Use ECC: yes
 Accel Description: Intel Xeon E5-2680 v3 @2.5~3.3GHz
 Accel Driver: None

Continued on next page



SPEC ACCEL ACC Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Lenovo

(Test Sponsor: Indiana University)

Intel Xeon E5-2680 v3

Lenovo NeXtScale nx360 M5

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 1.71

ACCEL license: 3440A

Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2017

Hardware Availability: Sep-2014

Software Availability: Mar-2017

Hardware (Continued)

Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: None
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.26.1.el7.x86_64
 Compiler: PGI Professional Edition, Release 17.3
 File System: Lustre 2.5 (DDN SFA12K) over 10Gb ethernet
 System State: Run level 3 (multi-user)
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
303.ostencil	118	1.22	<u>97.5</u>	<u>1.49</u>	94.2	1.54						
304.olbm	81.0	5.62	77.9	5.84	<u>78.3</u>	<u>5.81</u>						
314.omriq	2496	0.383	<u>2496</u>	<u>0.383</u>	2504	0.382						
350.md	548	0.460	<u>548</u>	<u>0.460</u>	548	0.460						
351.palm	222	1.66	220	1.68	<u>221</u>	<u>1.67</u>						
352.ep	226	2.35	<u>225</u>	<u>2.36</u>	221	2.39						
353.clvrleaf	328	1.36	<u>321</u>	<u>1.39</u>	318	1.40						
354.cg	<u>80.8</u>	<u>5.05</u>	81.0	5.04	80.6	5.06						
355.seismic	158	2.34	153	2.41	<u>155</u>	<u>2.39</u>						
356.sp	101	2.73	<u>101</u>	<u>2.74</u>	100	2.75						
357.csp	113	2.38	112	2.41	<u>112</u>	<u>2.41</u>						
359.miniGhost	163	2.26	<u>163</u>	<u>2.26</u>	163	2.27						
360.ilbdc	481	0.763	487	0.753	<u>483</u>	<u>0.759</u>						
363.swim	93.2	2.47	90.0	2.56	<u>92.9</u>	<u>2.48</u>						
370.bt	<u>204</u>	<u>1.09</u>	196	1.14	215	1.03						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program
/N/dc2/projects/hpc/lijunj/SPEC/accel-1.2-run/carbonate/Docs/sysinfo
$Rev: 6965 $ $Date:: 2015-04-21 #$
c05a7f14b1b1765e3fe1df68447e8a35
running on c11 Thu Aug 10 22:19:45 2017
```

Continued on next page



SPEC ACCEL ACC Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Lenovo

(Test Sponsor: Indiana University)

Intel Xeon E5-2680 v3

Lenovo NeXtScale nx360 M5

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 1.71

ACCEL license: 3440A

Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2017

Hardware Availability: Sep-2014

Software Availability: Mar-2017

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz
        2 "physical id"s (chips)
        24 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 12
        siblings : 12
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
    cache size : 30720 KB
```

```
From /proc/meminfo
    MemTotal:       263439912 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.3 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.3"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
    Linux c11 3.10.0-514.26.1.el7.x86_64 #1 SMP Tue Jun 20 01:16:02 EDT 2017
    x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 1 19:29
```

```
SPEC is set to: /N/dc2/projects/hpc/lijunj/SPEC/accel-1.2-run/carbonate
Filesystem           Type  Size  Used Avail Use% Mounted
on
10.10.0.171@o2ib:10.10.0.172@o2ib:/dc2 lustre  5.3P  5.0P  239T  96% /N/dc2
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program
Continued on next page



SPEC ACCEL ACC Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Lenovo

(Test Sponsor: Indiana University)

Intel Xeon E5-2680 v3

Lenovo NeXtScale nx360 M5

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 1.71

ACCEL license: 3440A

Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2017

Hardware Availability: Sep-2014

Software Availability: Mar-2017

Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(End of data from sysinfo program)

Base Compiler Invocation

C benchmarks:
pgcc

Fortran benchmarks:
pgfortran

Benchmarks using both Fortran and C:
pgcc pgfortran

Base Optimization Flags

C benchmarks:
-fast -Mfprelaxed -acc -ta=multicore

Fortran benchmarks:
-fast -Mfprelaxed -acc -ta=multicore

Benchmarks using both Fortran and C:

353.clvleaf: -fast -Mfprelaxed -acc -ta=multicore

359.miniGhost: -fast -Mfprelaxed -acc -ta=multicore -Mnomain

The flags file that was used to format this result can be browsed at

https://www.spec.org/accel/flags/pgi2017_flags.20170830.html

You can also download the XML flags source by saving the following link:

https://www.spec.org/accel/flags/pgi2017_flags.20170830.xml



SPEC ACCEL ACC Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Lenovo

(Test Sponsor: Indiana University)

Intel Xeon E5-2680 v3

Lenovo NeXtScale nx360 M5

SPECaccel_acc_peak = Not Run

SPECaccel_acc_base = 1.71

ACCEL license: 3440A

Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2017

Hardware Availability: Sep-2014

Software Availability: Mar-2017

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC ACCEL v1.2.

Report generated on Wed Aug 30 17:05:05 2017 by SPEC ACCEL PS/PDF formatter v1290.

Originally published on 30 August 2017.