CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

ASUS Computer International

Asus M2N32-SLI Deluxe, AMD Athlon (TM) 64 5000+

SPECfp2000 = 1786

SPECfp_base2000 = 1631

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jul-2006 | Hardware Avail: Jun-2006 | Software Avail: Jun-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	57.2	2797	57.5	2781
171.swim	3100	133	2325	126	2464
172.mgrid	1800	120	1496	120	1495
173.applu	2100	137	1532	122	1728
177.mesa	1400	151	928	74.2	1886
178.galgel	2900	112	2593	105	2750
179.art	2600	82.3	3159	82.3	3159
183.equake	1300	75.9	1712	74.7	1741
187.facerec	1900	95.8	1983	95.8	1984
188.ammp	2200	234	939	205	1075
189.lucas	2000	111	1806	94.5	2115
191.fma3d	2100	129	1628	127	1659
200.sixtrack	1100	139	792	139	794
301.apsi	2600	232	1120	233	1117

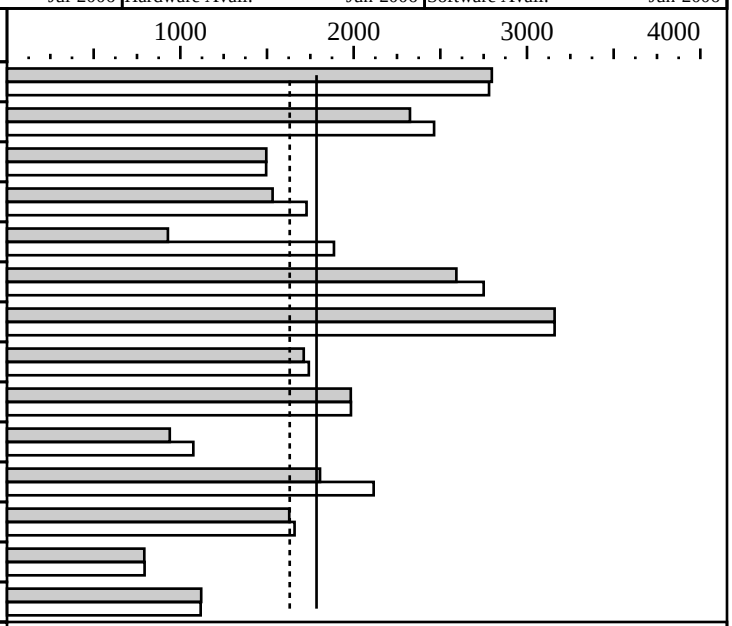

Hardware

CPU:	AMD Athlon (TM) 64 5000+
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	no
Primary Cache:	64KBI + 64KBD on chip, per core
Secondary Cache:	512KB (I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x1 GB, Corsair CM2X1024-8500C5 DDR2-1066 5-5-5-15
Disk Subsystem:	SATA, Western Digital WD740GD, 10000 rpm
Other Hardware:	None

Software

Operating System:	Microsoft Windows XP SP2
Compiler:	Intel C++ 9.1 build 20060519Z for IA32, Intel Fortran 9.1 build 20060519Z for IA32, PGI Fortran compiler 6.0-5 for Windows XP, PGI C compiler 6.0-5 for Windows XP, ACML Version 2.5.3 (bundled with PGI 6.0-5)
File System:	NTFS
System State:	default

Notes/Tuning Information

```
+FDO:
 icl, ifort  : PASS1=-Qprof_gen  PASS2=-Qprof_use
 pgf90       : PASS1=-Mpfi       PASS2=-Mpfo
ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
pgf90 is the PGI Fortran 90 compiler.
pgcc is the PGI C compiler.
ONESTEP is set to 1 for every compile with the PGI compilers.
Portability:
178.galgel:                 -Mfixed
Baseline: C      :  pgcc    -fastsse -Mipa=fast,inline
Baseline: Fortran:  pgf90   -fastsse -Mipa=fast,inline +FDO
Peak tuning:
168.wupwise:        pgf90   -fastsse -Mipa=fast,inline -Mnovect
171.swim:           ifort   -Qipo  -O3  -QaxN -QxW -Qunroll0 +FDO
172.mgrid:          pgf90   -fastsse -Mipa=fast,inline
173.applu:          ifort   -Qipo  -O3 -QaxN -QxW -auto +FDO
177.mesa:           icl     -Qipo -arch:SSE2 -Qunroll1 -Qansi_alias +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                        -Qoption,f,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:          pgf90   -fastsse -Mipa=fast,safe -Munix -lacml
                              RM_SOURCES=lapak.f90
 179.art:             pgcc     basepeak=yes
 183.equake:          icl     -fast -arch:SSE2 -QaxW +FDO
 187.facerec:         pgf90   -fastsse -Mipa=fast,inline +FDO
 188.ammp:            icl     -Oa   -arch:SSE2  -Zp4 -Qansi_alias
 189.lucas:           ifort   -Qipo -QxW -Qunroll1
 191.fma3d:           pgf90   -Mipa=fast,inline -fastsse -Mnovect +FDO
 200.sixtrack:        pgf90   -fastsse -Mipa=fast,inline
 301.apsi:            pgf90   -fastsse -Mipa=fast,inline
The system under test can be built with an ATI X1900 XTX graphics card and
an ATX APE-300x power supply.
```