



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp<sup>®</sup>\_rate2006 = 27.7

NovaScale B280 (Intel Xeon processor 5110,1.60GHz)

SPECfp\_rate\_base2006 = 27.2

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Jan-2007

Software Availability: Dec-2006

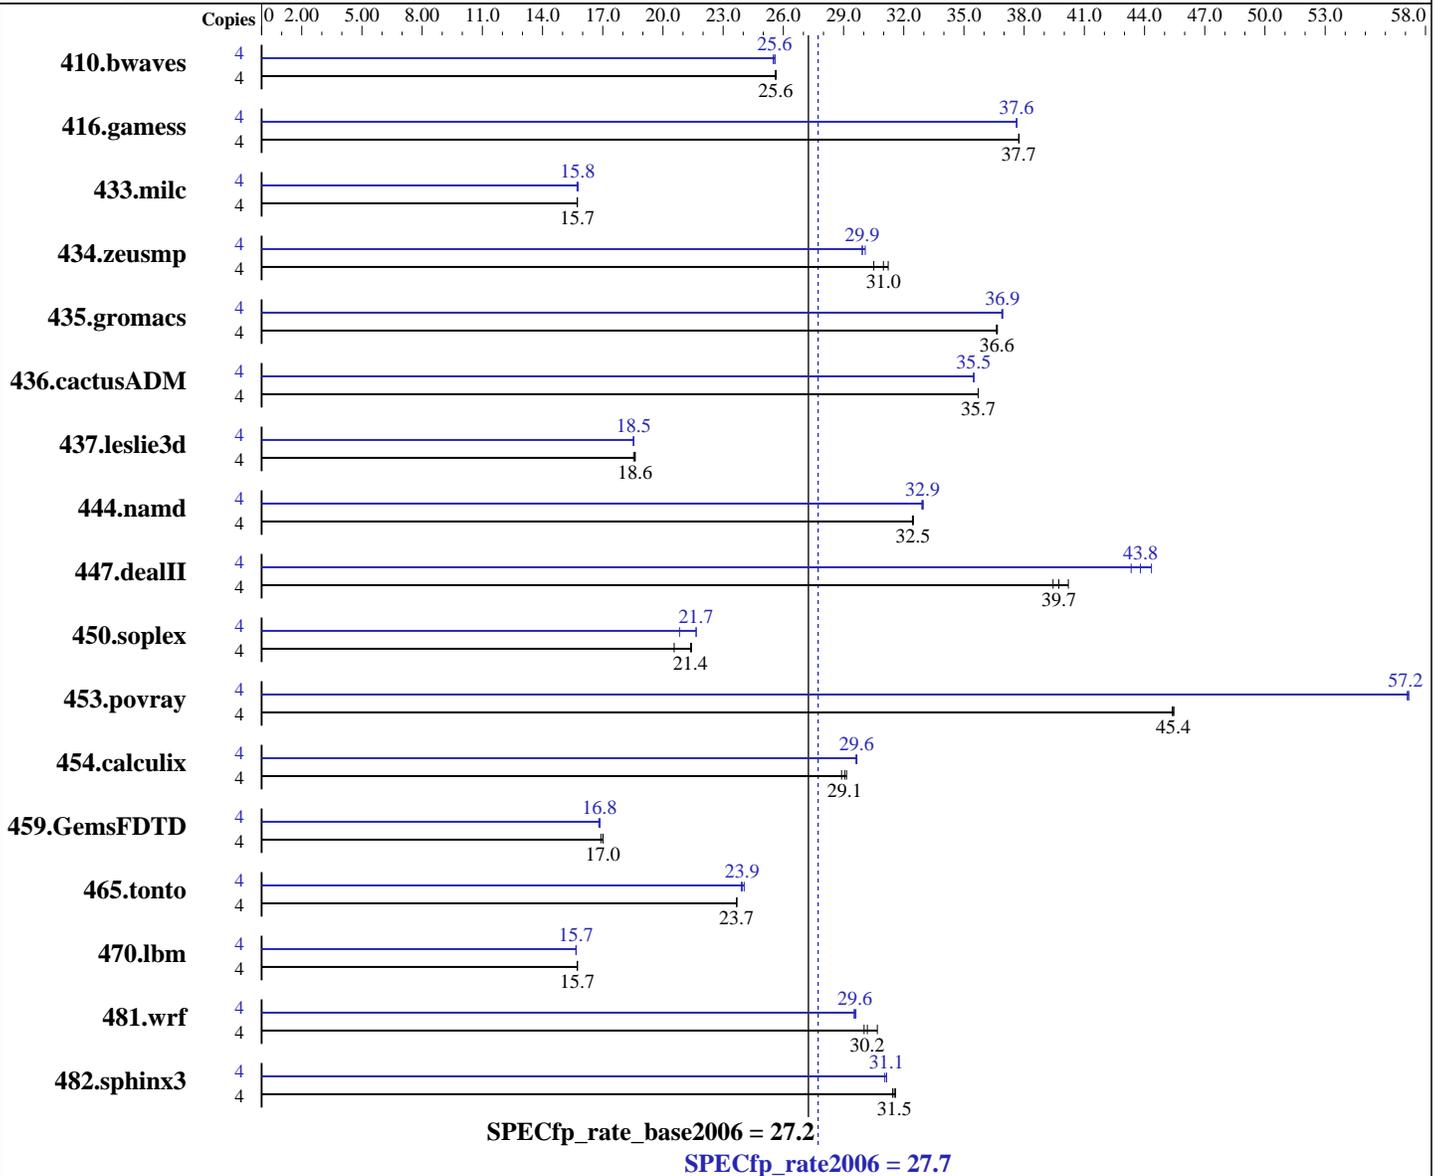

### Hardware

CPU Name: Intel Xeon 5110  
 CPU Characteristics: 1.60 GHz, 4MB L2, 1066MHz bus  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

### Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1  
 Compiler: Intel C++ Compiler for IA32 version 9.1  
 Package ID W\_CC\_C\_9.1.033 Build no 20061103Z  
 Intel Fortran Compiler for IA32 version 9.1  
 Package ID W\_FC\_C\_9.1.033 Build no 20061103Z  
 Microsoft Visual Studio .NET 2003 (lib & linker)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 27.7

NovaScale B280 (Intel Xeon processor 5110,1.60GHz)

SPECfp\_rate\_base2006 = 27.2

CPU2006 license: 20

Test date: Dec-2006

Test sponsor: Bull SAS

Hardware Availability: Jan-2007

Tested by: Bull SAS

Software Availability: Dec-2006

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (1GB DIMMx8, FB-DIMM PC2-5300F ECC CL5)  
Disk Subsystem: 73 GB SAS, 10000RPM  
Other Hardware: None

Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2120	25.6	<u>2122</u>	<u>25.6</u>	2124	25.6	4	2125	25.6	2132	25.5	<u>2126</u>	<u>25.6</u>
416.gamess	4	<u>2076</u>	<u>37.7</u>	2075	37.8	2076	37.7	4	2082	37.6	2081	37.6	<u>2081</u>	<u>37.6</u>
433.milc	4	<u>2335</u>	<u>15.7</u>	2335	15.7	2333	15.7	4	2336	15.7	2329	15.8	<u>2330</u>	<u>15.8</u>
434.zeusmp	4	1166	31.2	1193	30.5	<u>1175</u>	<u>31.0</u>	4	<u>1216</u>	<u>29.9</u>	1216	29.9	1210	30.1
435.gromacs	4	780	36.6	<u>779</u>	<u>36.6</u>	779	36.7	4	774	36.9	<u>774</u>	<u>36.9</u>	773	36.9
436.cactusADM	4	1339	35.7	1339	35.7	<u>1339</u>	<u>35.7</u>	4	1347	35.5	<u>1347</u>	<u>35.5</u>	1347	35.5
437.leslie3d	4	2028	18.5	2019	18.6	<u>2021</u>	<u>18.6</u>	4	2029	18.5	<u>2029</u>	<u>18.5</u>	2028	18.5
444.namd	4	989	32.4	988	32.5	<u>988</u>	<u>32.5</u>	4	975	32.9	<u>974</u>	<u>32.9</u>	973	33.0
447.dealII	4	<u>1152</u>	<u>39.7</u>	1160	39.4	1138	40.2	4	<u>1045</u>	<u>43.8</u>	1056	43.3	1032	44.3
450.soplex	4	1623	20.6	1557	21.4	<u>1561</u>	<u>21.4</u>	4	1602	20.8	1541	21.7	<u>1541</u>	<u>21.7</u>
453.povray	4	469	45.4	<u>468</u>	<u>45.4</u>	468	45.5	4	373	57.1	372	57.2	<u>372</u>	<u>57.2</u>
454.calculix	4	1142	28.9	<u>1136</u>	<u>29.1</u>	1132	29.1	4	1114	29.6	<u>1113</u>	<u>29.6</u>	1112	29.7
459.GemsFDTD	4	2510	16.9	2495	17.0	<u>2495</u>	<u>17.0</u>	4	2526	16.8	2517	16.9	<u>2520</u>	<u>16.8</u>
465.tonto	4	<u>1663</u>	<u>23.7</u>	1662	23.7	1663	23.7	4	<u>1644</u>	<u>23.9</u>	1647	23.9	1637	24.0
470.lbm	4	3494	15.7	3493	15.7	<u>3493</u>	<u>15.7</u>	4	3507	15.7	<u>3507</u>	<u>15.7</u>	3507	15.7
481.wrf	4	1488	30.0	<u>1480</u>	<u>30.2</u>	1456	30.7	4	1513	29.5	<u>1511</u>	<u>29.6</u>	1509	29.6
482.sphinx3	4	2479	31.4	<u>2473</u>	<u>31.5</u>	2468	31.6	4	2510	31.1	2503	31.1	<u>2503</u>	<u>31.1</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc7.1 -Qc99 ifort



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 27.7

NovaScale B280 (Intel Xeon processor 5110,1.60GHz)

SPECfp\_rate\_base2006 = 27.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Jan-2007

Software Availability: Dec-2006

## Base Portability Flags

```

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
           -DBOOST_NO_INTRINSIC_WCHAR_T
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

```

## Base Optimization Flags

```

C benchmarks:
  -fast /F950000000 shlw32m.lib          -link /FORCE:MULTIPLE

C++ benchmarks:
  -fast -Qcxx_features /F950000000 shlw32m.lib
  -link /FORCE:MULTIPLE

Fortran benchmarks:
  -fast /F950000000          -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
  -fast /F950000000          -link /FORCE:MULTIPLE

```

## Peak Compiler Invocation

```

C benchmarks:
  icl -Qvc7.1 -Qc99

C++ benchmarks:
  icl -Qvc7.1

Fortran benchmarks:
  ifort

Benchmarks using both Fortran and C:
  icl -Qvc7.1 -Qc99 ifort

```

## Peak Portability Flags

```

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
           -DBOOST_NO_INTRINSIC_WCHAR_T

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 27.7

NovaScale B280 (Intel Xeon processor 5110,1.60GHz)

SPECfp\_rate\_base2006 = 27.2

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Dec-2006  
Hardware Availability: Jan-2007  
Software Availability: Dec-2006

## Peak Portability Flags (Continued)

453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

C benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE

C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000  
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000  
-link /FORCE:MULTIPLE

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:17:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 February 2007.