



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®_rate2006 = 50.3

PRIMERGY RX200 S3, Intel Xeon processor 5140, 2.33 GHz

SPECint_rate_base2006 = 48.0

CPU2006 license: 22


Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jul-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

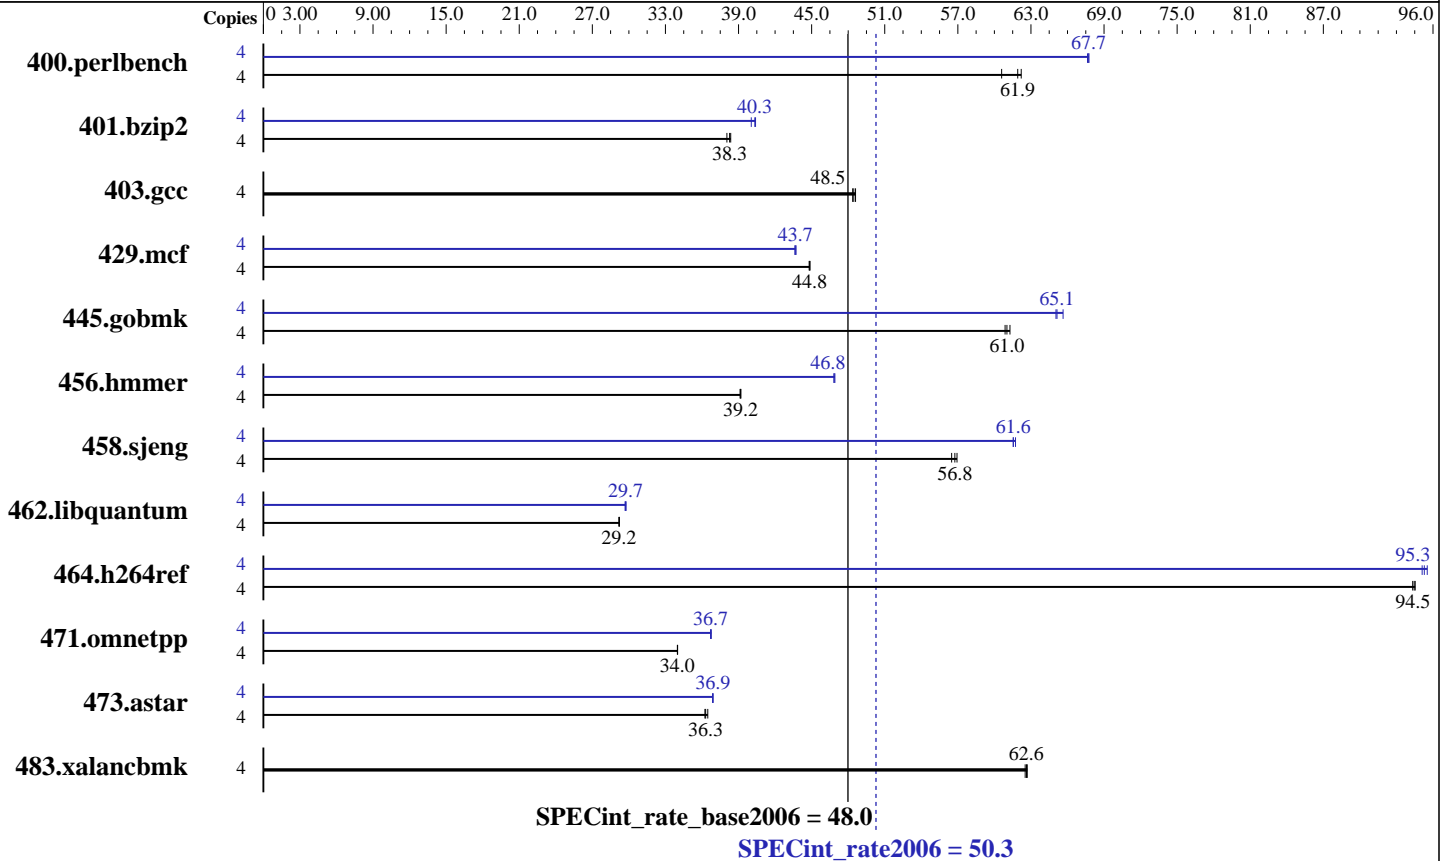

Hardware

CPU Name: Intel Xeon 5140
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 2333
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8x1 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
 Disk Subsystem: SAS (73GB 15400 rpm)
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l_cc_p_9.1.047
 Auto Parallel: No
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Smart Heap Library, Version 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S3, Intel Xeon processor 5140,
2.33 GHz

SPECint_rate2006 = 50.3

SPECint_rate_base2006 = 48.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Jul-2006

Software Availability: Feb-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	645	60.6	628	62.2	<u>631</u>	<u>61.9</u>	4	577	67.7	<u>577</u>	<u>67.7</u>	578	67.6
401.bzip2	4	1006	38.4	<u>1009</u>	<u>38.3</u>	1015	38.0	4	<u>957</u>	<u>40.3</u>	964	40.0	956	40.4
403.gcc	4	<u>664</u>	<u>48.5</u>	663	48.6	666	48.4	4	<u>664</u>	<u>48.5</u>	663	48.6	666	48.4
429.mcf	4	814	44.8	<u>814</u>	<u>44.8</u>	813	44.9	4	834	43.7	836	43.6	<u>835</u>	<u>43.7</u>
445.gobmk	4	685	61.3	689	60.9	<u>688</u>	<u>61.0</u>	4	639	65.6	645	65.1	<u>644</u>	<u>65.1</u>
456.hmmmer	4	954	39.1	952	39.2	<u>953</u>	<u>39.2</u>	4	796	46.9	<u>797</u>	<u>46.8</u>	797	46.8
458.sjeng	4	850	56.9	<u>853</u>	<u>56.8</u>	857	56.5	4	786	61.5	784	61.7	<u>786</u>	<u>61.6</u>
462.libquantum	4	2836	29.2	<u>2839</u>	<u>29.2</u>	2840	29.2	4	2784	29.8	<u>2788</u>	<u>29.7</u>	2792	29.7
464.h264ref	4	936	94.5	<u>937</u>	<u>94.5</u>	938	94.3	4	<u>929</u>	<u>95.3</u>	931	95.1	927	95.5
471.omnetpp	4	736	34.0	735	34.0	<u>736</u>	<u>34.0</u>	4	680	36.8	681	36.7	<u>681</u>	<u>36.7</u>
473.aster	4	<u>774</u>	<u>36.3</u>	770	36.5	775	36.2	4	761	36.9	<u>761</u>	<u>36.9</u>	762	36.9
483.xalancbmk	4	<u>441</u>	<u>62.6</u>	441	62.5	440	62.7	4	<u>441</u>	<u>62.6</u>	441	62.5	440	62.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

The system bus runs at 1333 MHz

All binaries were built with 32-bit Intel compiler except:
401.bzip2, 456.hmmmer and 462.libquantum in peak were built with
64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 50.3

PRIMERGY RX200 S3, Intel Xeon processor 5140,
2.33 GHz

SPECint_rate_base2006 = 48.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Jul-2006

Software Availability: Feb-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

456.hmmer: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

462.libquantum: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S3, Intel Xeon processor 5140,
2.33 GHz

SPECint_rate2006 = 50.3

SPECint_rate_base2006 = 48.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Jul-2006

Software Availability: Feb-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof_gen(pass 1) -prof_use(pass 2) -fast

401.bzip2: -fast

403.gcc: basepeak = yes

429.mcf: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmartheap

445.gobmk: Same as 429.mcf

456.hmmer: Same as 400.perlbench

458.sjeng: Same as 429.mcf

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 429.mcf

C++ benchmarks:

471.omnetpp: -prof_gen(pass 1) -prof_use(pass 2) -xP -O3 -ipo
-no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap

473.astar: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmartheap

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:07:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2007.