



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherboard X7DA8+

SPECint®_rate2006 = 55.6

SPECint_rate_base2006 = 53.7

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

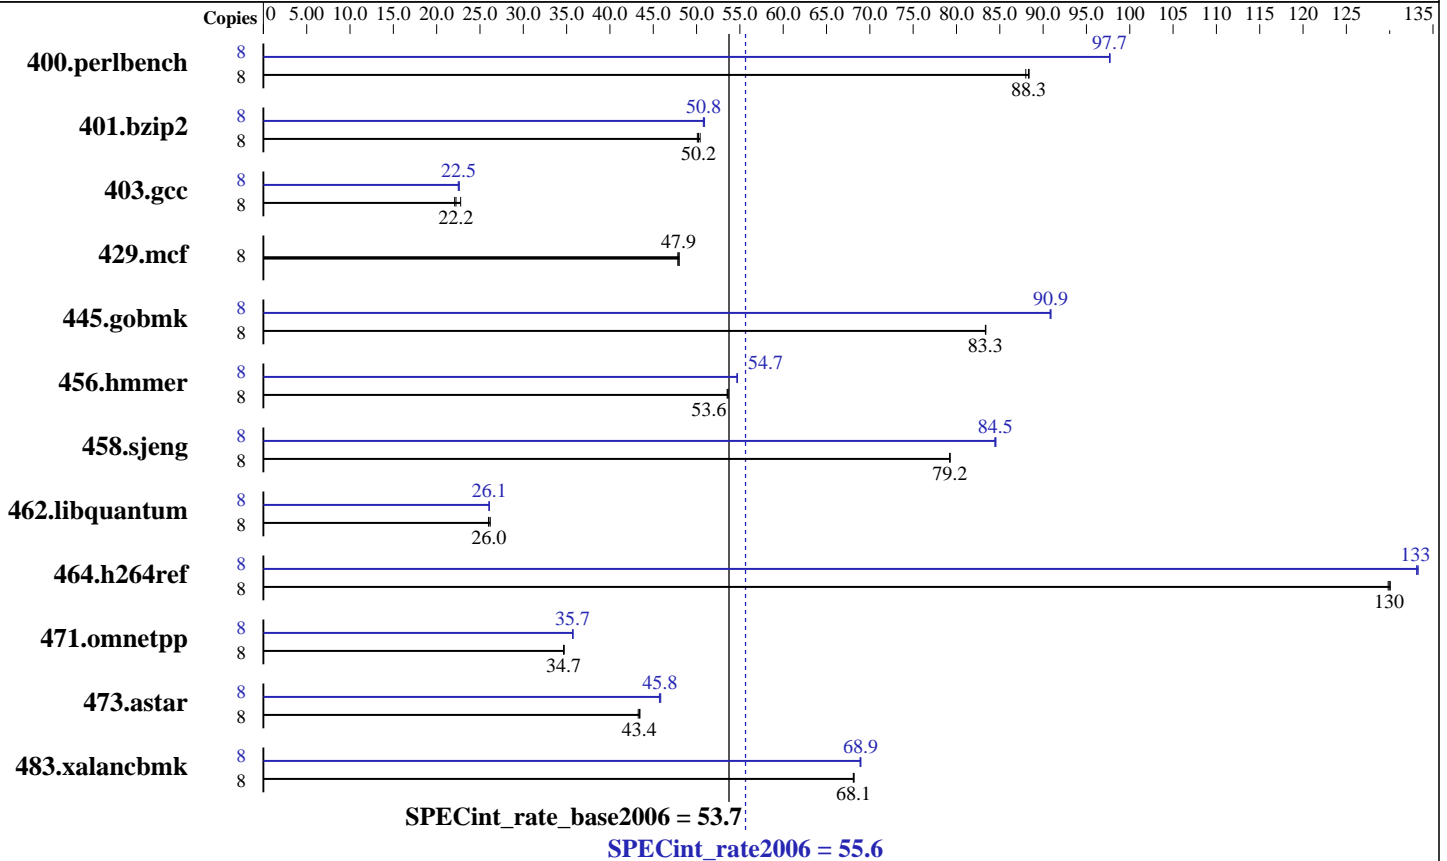

Hardware

CPU Name: Intel Xeon L5310
 CPU Characteristics: 1.60GHz, 1066 MHz Bus
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 X 2GB ECC PC2-5300, CL5, FBDIMM)
 Disk Subsystem: 750GB IDE, 7200RPM
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition W/ SP1
 Compiler: Intel C++ Compiler for IA32 version 9.1
 Build no 20070322Z
 Microsoft Visual Studio .Net 2003 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
Motherboard X7DA8+

SPECint_rate2006 = 55.6
SPECint_rate_base2006 = 53.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	888	88.0	885	88.3	884	88.4	8	800	97.7	800	97.7	800	97.7
401.bzip2	8	1541	50.1	1537	50.2	1531	50.4	8	1516	50.9	1520	50.8	1519	50.8
403.gcc	8	2828	22.8	2917	22.1	2897	22.2	8	2857	22.5	2847	22.6	2863	22.5
429.mcf	8	1520	48.0	1525	47.8	1522	47.9	8	1520	48.0	1525	47.8	1522	47.9
445.gobmk	8	1007	83.3	1007	83.3	1006	83.4	8	923	90.9	923	90.9	924	90.8
456.hammer	8	1392	53.6	1394	53.5	1392	53.6	8	1364	54.7	1366	54.7	1364	54.7
458.sjeng	8	1221	79.2	1222	79.2	1221	79.3	8	1145	84.6	1147	84.4	1146	84.5
462.libquantum	8	6329	26.2	6380	26.0	6367	26.0	8	6359	26.1	6358	26.1	6365	26.0
464.h264ref	8	1362	130	1364	130	1361	130	8	1330	133	1329	133	1328	133
471.omnetpp	8	1440	34.7	1443	34.7	1443	34.6	8	1399	35.7	1400	35.7	1400	35.7
473.astar	8	1292	43.5	1298	43.3	1294	43.4	8	1228	45.7	1227	45.8	1225	45.9
483.xalancbmk	8	811	68.1	810	68.1	810	68.2	8	801	68.9	802	68.9	800	69.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with CSE-833S-R760 case,
To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description located as of <http://www.supermicro.com/products/motherboard/Xeon1333/5000X/X7DA8+.cfm>
The system bus runs at 1066 MHz

Base Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99
C++ benchmarks:
icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
Motherboard X7DA8+

SPECint_rate2006 = 55.6

SPECint_rate_base2006 = 53.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Base Optimization Flags (Continued)

C++ benchmarks:
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Peak Optimization Flags

C benchmarks:
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
shlw32m.lib -link /FORCE:MULTIPLE
401.bzip2: Same as 400.perlbench
403.gcc: Same as 400.perlbench
429.mcf: basepeak = yes
445.gobmk: Same as 400.perlbench
456.hmmmer: Same as 400.perlbench
458.sjeng: Same as 400.perlbench

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro
Motherboard X7DA8+**

SPECint_rate2006 = 55.6

SPECint_rate_base2006 = 53.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Peak Optimization Flags (Continued)

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

471.omnetpp: `-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

473.astar: `-Qprof_gen(pass 1) -Qprof_use(pass 2) -QxP -O2 -Qipo
-Qprec-div- -Qunroll14 -Ob2 -Qsfa16 -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

483.xalancbmk: Same as 471.omnetpp

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 11:26:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 June 2007.