



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Rg-1  
(Intel Xeon processor X5355)

**SPECint<sup>®</sup>2006 = 16.3**

**SPECint\_base2006 = 15.5**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2007

Hardware Availability: Jan-2007

Software Availability: Jan-2007

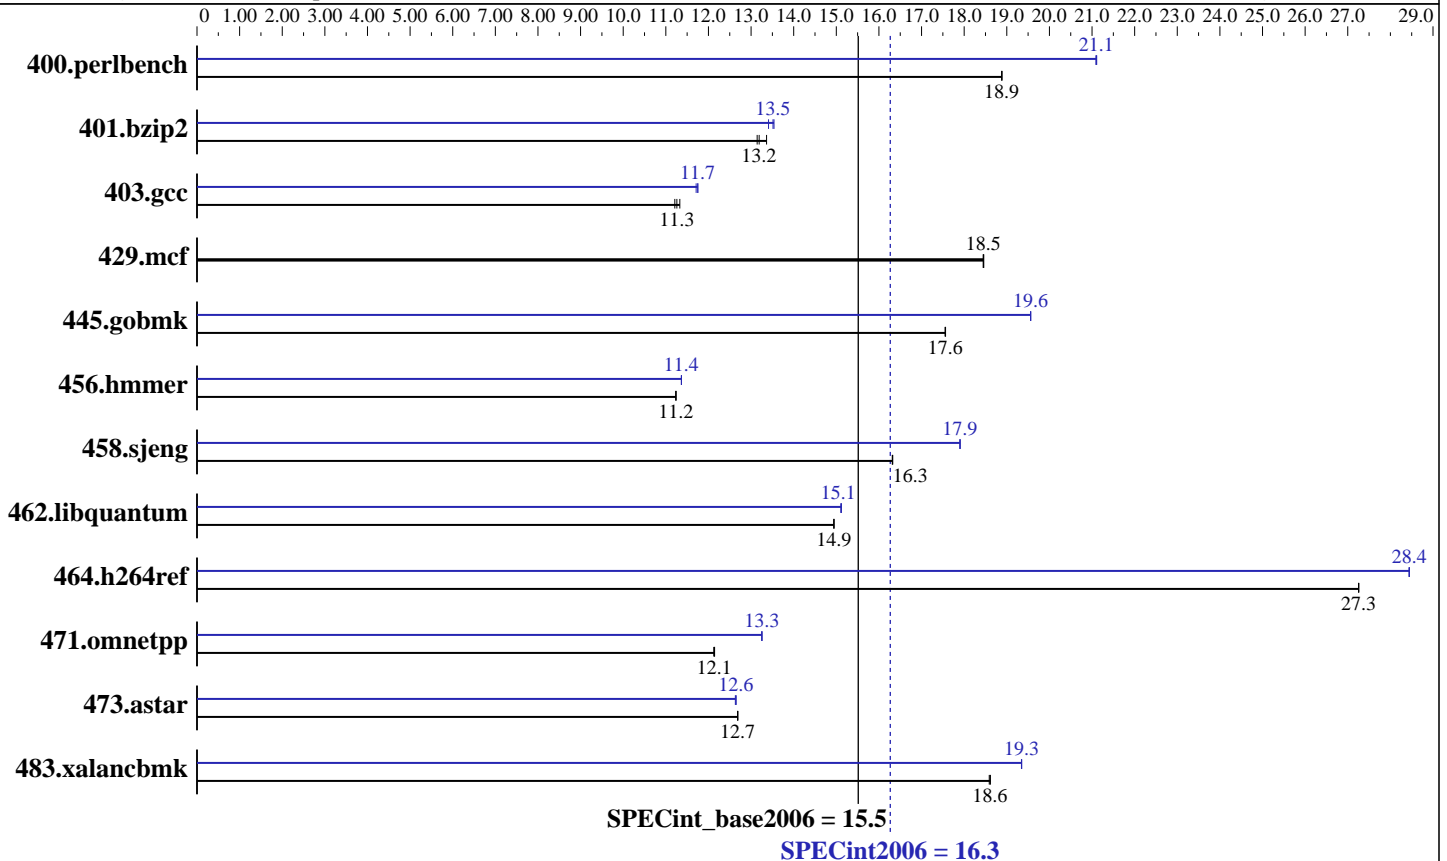

### Hardware

CPU Name: Intel Xeon X5355  
 CPU Characteristics: 2.66 GHz, 2x4 MB L2 shared, 1333 MHz bus  
 CPU MHz: 2666  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (8x1 GB DDR2 5300F, 2 rank, CL5-5-5, ECC)  
 Disk Subsystem: 1x73.2 GB SAS, 15000RPM  
 Other Hardware: None

### Software

Operating System: Windows Server 2003, Enterprise x64 Edition  
 Compiler: Intel C++ Compiler for 32bit version 9.1  
 Build 20070109, Package-ID W\_CC\_C\_9.1.034  
 Microsoft Visual Studio 2005 (libr. & linker)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Rg-1  
(Intel Xeon processor X5355)

SPECint2006 = 16.3

SPECint\_base2006 = 15.5

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2007

Hardware Availability: Jan-2007

Software Availability: Jan-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>517</u>	<u>18.9</u>	517	18.9	517	18.9	<u>463</u>	<u>21.1</u>	463	21.1	463	21.1
401.bzip2	<u>732</u>	<u>13.2</u>	734	13.1	722	13.4	720	13.4	<u>714</u>	<u>13.5</u>	713	13.5
403.gcc	<u>715</u>	<u>11.3</u>	718	11.2	711	11.3	<u>685</u>	<u>11.7</u>	685	11.8	687	11.7
429.mcf	494	18.5	494	18.4	<u>494</u>	<u>18.5</u>	494	18.5	494	18.4	<u>494</u>	<u>18.5</u>
445.gobmk	598	17.6	597	17.6	<u>597</u>	<u>17.6</u>	<u>536</u>	<u>19.6</u>	536	19.6	536	19.6
456.hammer	<u>830</u>	<u>11.2</u>	830	11.2	831	11.2	<u>821</u>	<u>11.4</u>	821	11.4	821	11.4
458.sjeng	742	16.3	741	16.3	<u>741</u>	<u>16.3</u>	676	17.9	676	17.9	<u>676</u>	<u>17.9</u>
462.libquantum	1386	14.9	<u>1387</u>	<u>14.9</u>	1387	14.9	1371	15.1	1372	15.1	<u>1371</u>	<u>15.1</u>
464.h264ref	812	27.3	812	27.3	<u>812</u>	<u>27.3</u>	778	28.4	<u>778</u>	<u>28.4</u>	778	28.4
471.omnetpp	<u>515</u>	<u>12.1</u>	515	12.1	515	12.1	472	13.3	472	13.3	<u>472</u>	<u>13.3</u>
473.astar	553	12.7	553	12.7	<u>553</u>	<u>12.7</u>	555	12.6	<u>555</u>	<u>12.6</u>	556	12.6
483.xalancbmk	<u>371</u>	<u>18.6</u>	371	18.6	371	18.6	357	19.3	<u>357</u>	<u>19.3</u>	357	19.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

The Express5800/120Rg-1 and the Express5800/120Ri-2 models are electronically equivalent.

The results have been measured on a Express5800/120Ri-2 model.

## Base Compiler Invocation

C benchmarks:  
icl -Qvc8 -Qc99

C++ benchmarks:  
icl -Qvc8

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:  
-fast -F512000000 shlw32M.lib -link -FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Rg-1  
(Intel Xeon processor X5355)

**SPECint2006 = 16.3**

**SPECint\_base2006 = 15.5**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** May-2007  
**Hardware Availability:** Jan-2007  
**Software Availability:** Jan-2007

## Base Optimization Flags (Continued)

C++ benchmarks:  
-fast -Qcxx-features -F512000000 shlW32M.lib  
-link -FORCE:MULTIPLE

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc8 -Qc99  
C++ benchmarks:  
icl -Qvc8

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:  
400.perlbench: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -F512000000  
shlW32M.lib -link -FORCE:MULTIPLE  
401.bzip2: Same as 400.perlbench  
403.gcc: Same as 400.perlbench  
429.mcf: basepeak = yes  
445.gobmk: Same as 400.perlbench  
456.hmmer: Same as 400.perlbench

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Rg-1  
(Intel Xeon processor X5355)

**SPECint2006 = 16.3**

**SPECint\_base2006 = 15.5**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Jan-2007

## Peak Optimization Flags (Continued)

458.sjeng: Same as 400.perlbench

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx-features  
-F512000000 shlw32M.lib -link -FORCE:MULTIPLE

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-cpu2006-ic91-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-cpu2006-ic91-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:59:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 July 2007.