



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5320,1.86GHz)

SPECfp[®]_rate2006 = 44.1

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Aug-2007

Hardware Availability: Mar-2007

Software Availability: May-2007

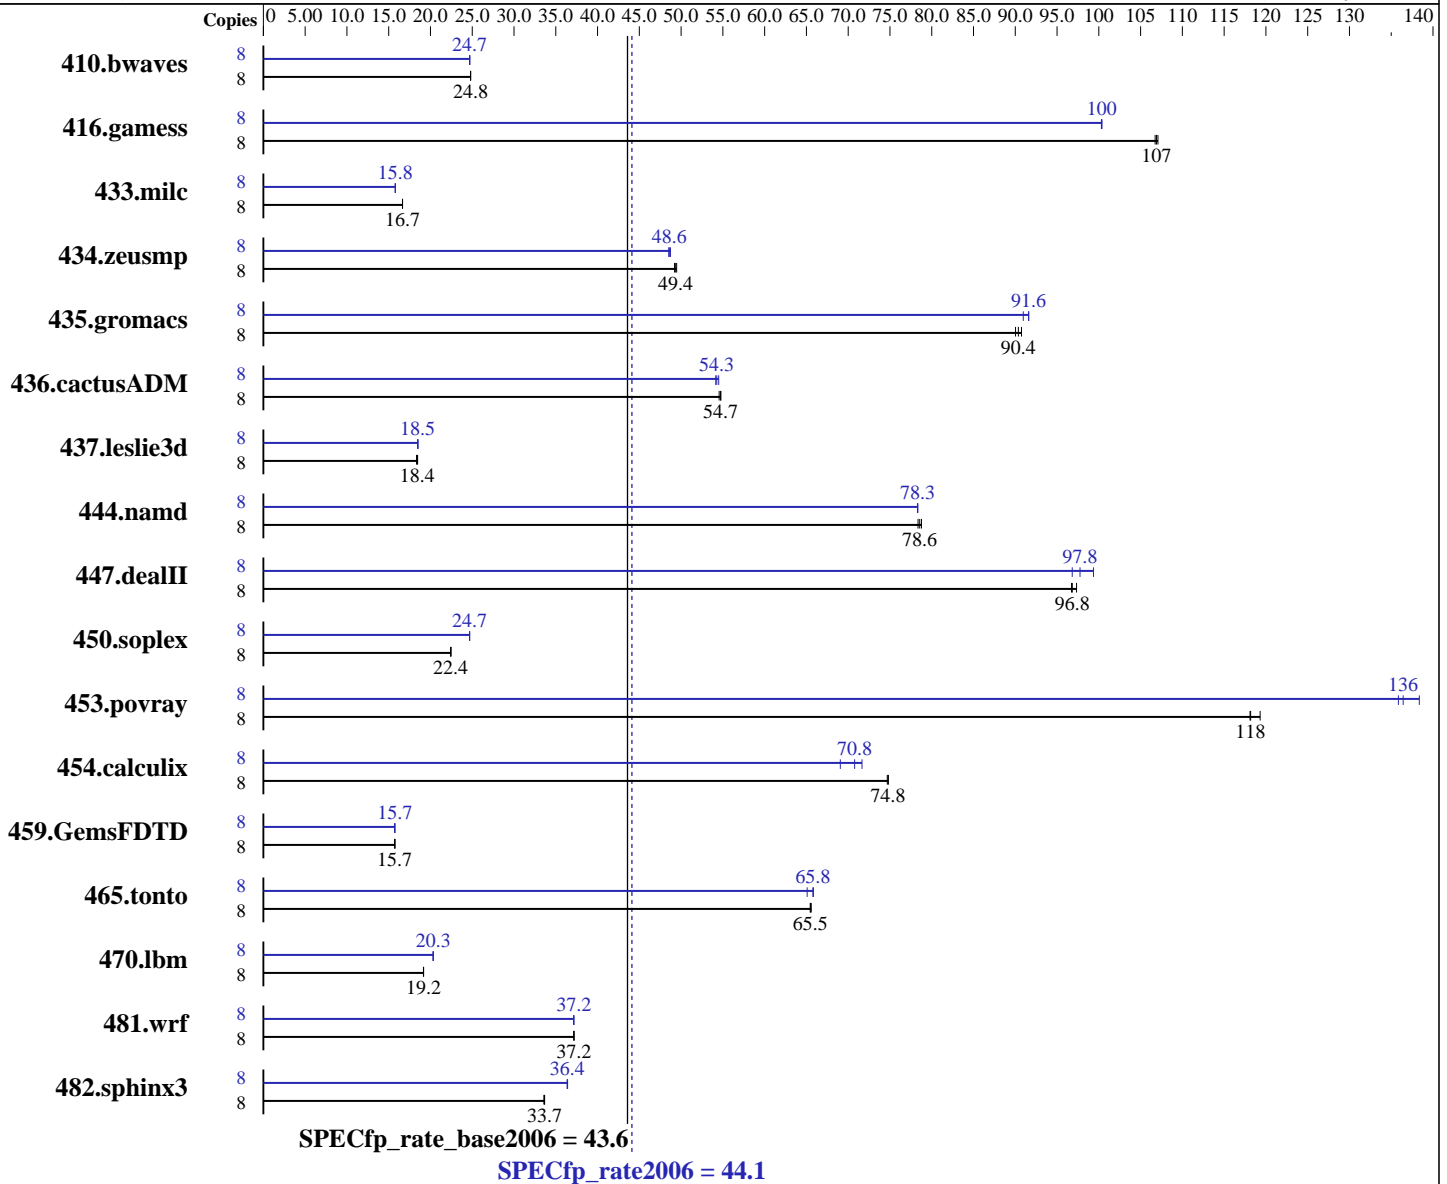

Hardware

CPU Name: Intel Xeon E5320
 CPU Characteristics: 1.86 GHz, 8 MB L2, 1066 MHz system bus
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1 to 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE LINUX Enterprise Server 10
 Kernel 2.6.16.21-0.8-smp for x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application version 10.0
 Build 20070426 Package ID: l_cc_p_10.0.023
 Intel Fortran Compiler for IA32/EM64T application version 10.0
 Build 20070426 Package ID: l_fc_p_10.0.023
 Auto Parallel: No
 File System: ext2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5320,1.86GHz)

SPECfp_rate2006 = 44.1

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Aug-2007
Hardware Availability: Mar-2007
Software Availability: May-2007

L3 Cache: None
Other Cache: None
Memory: 12 GB (12x1 GB) FB-DIMM PC2-4200F ECC CL4
Disk Subsystem: 1x73 GB SAS, 15000 RPM
Other Hardware: None

System State: Multi-user run level 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	4383	24.8	4384	24.8	4384	24.8	8	4403	24.7	4403	24.7	4401	24.7
416.gamess	8	1467	107	1463	107	1465	107	8	1562	100	1561	100	1561	100
433.milc	8	4409	16.7	4409	16.7	4411	16.6	8	4652	15.8	4650	15.8	4649	15.8
434.zeusmp	8	1475	49.4	1479	49.2	1472	49.5	8	1498	48.6	1500	48.5	1494	48.7
435.gromacs	8	634	90.0	629	90.7	632	90.4	8	624	91.6	624	91.6	628	91.0
436.cactusADM	8	1747	54.7	1746	54.8	1752	54.6	8	1754	54.5	1766	54.1	1762	54.3
437.leslie3d	8	4102	18.3	4085	18.4	4073	18.5	8	4071	18.5	4071	18.5	4063	18.5
444.namd	8	814	78.8	819	78.4	817	78.6	8	819	78.3	820	78.3	819	78.3
447.dealII	8	945	96.8	946	96.7	940	97.3	8	945	96.8	921	99.4	936	97.8
450.soplex	8	2971	22.5	2976	22.4	2974	22.4	8	2703	24.7	2704	24.7	2702	24.7
453.povray	8	360	118	357	119	360	118	8	312	136	308	138	313	136
454.calculix	8	883	74.8	882	74.8	884	74.7	8	933	70.8	921	71.7	956	69.1
459.GemsFDTD	8	5401	15.7	5390	15.7	5395	15.7	8	5404	15.7	5394	15.7	5390	15.7
465.tonto	8	1200	65.6	1203	65.5	1202	65.5	8	1209	65.1	1197	65.8	1196	65.8
470.lbm	8	5737	19.2	5733	19.2	5733	19.2	8	5410	20.3	5406	20.3	5406	20.3
481.wrf	8	2403	37.2	2405	37.2	2404	37.2	8	2407	37.1	2404	37.2	2404	37.2
482.sphinx3	8	4644	33.6	4632	33.7	4633	33.7	8	4287	36.4	4286	36.4	4282	36.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

All binaries were built with 64-bit Intel compiler except:
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.

The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R460 model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5320,1.86GHz)

SPECfp_rate2006 = 44.1

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Aug-2007
Hardware Availability: Mar-2007
Software Availability: May-2007

Base Compiler Invocation

C benchmarks:
icc
C++ benchmarks:
icpc
Fortran benchmarks:
ifort
Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast
C++ benchmarks:
-fast
Fortran benchmarks:
-fast
Benchmarks using both Fortran and C:
-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5320,1.86GHz)

SPECfp_rate2006 = 44.1

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Aug-2007
Hardware Availability: Mar-2007
Software Availability: May-2007

Peak Compiler Invocation

C benchmarks:

```
/opt/intel/cc/10.0.023/bin/icc -L/opt/intel/cc/10.0.023/lib  
-I/opt/intel/cc/10.0.023/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.0.023/bin/icpc -L/opt/intel/cc/10.0.023/lib  
-I/opt/intel/cc/10.0.023/include
```

Fortran benchmarks (except as noted below):

ifort

```
434.zeusmp: /opt/intel/fc/10.0.023/bin/ifort -L/opt/intel/fc/10.0.023/lib  
-I/opt/intel/fc/10.0.023/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.deallI: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32
```

```
470.lbm: Same as 433.milc
```

```
482.sphinx3: -fast -auto_ilp32
```

C++ benchmarks:

```
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5320,1.86GHz)

SPECfp_rate2006 = 44.1

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Aug-2007
Hardware Availability: Mar-2007
Software Availability: May-2007

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: `-prof_gen(pass 1) -prof_use(pass 2) -fast`

416.gamess: Same as 410.bwaves

434.zeusmp: `-fast`

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: Same as 410.bwaves

Benchmarks using both Fortran and C:

`-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32`

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.20090714.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.20090714.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:48:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 October 2007.