



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/140Re-4  
(Intel Xeon processor 7140M)

SPECfp®\_rate2006 = 60.2

SPECfp\_rate\_base2006 = 58.8

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2007

Hardware Availability: Oct-2006

Software Availability: Apr-2007

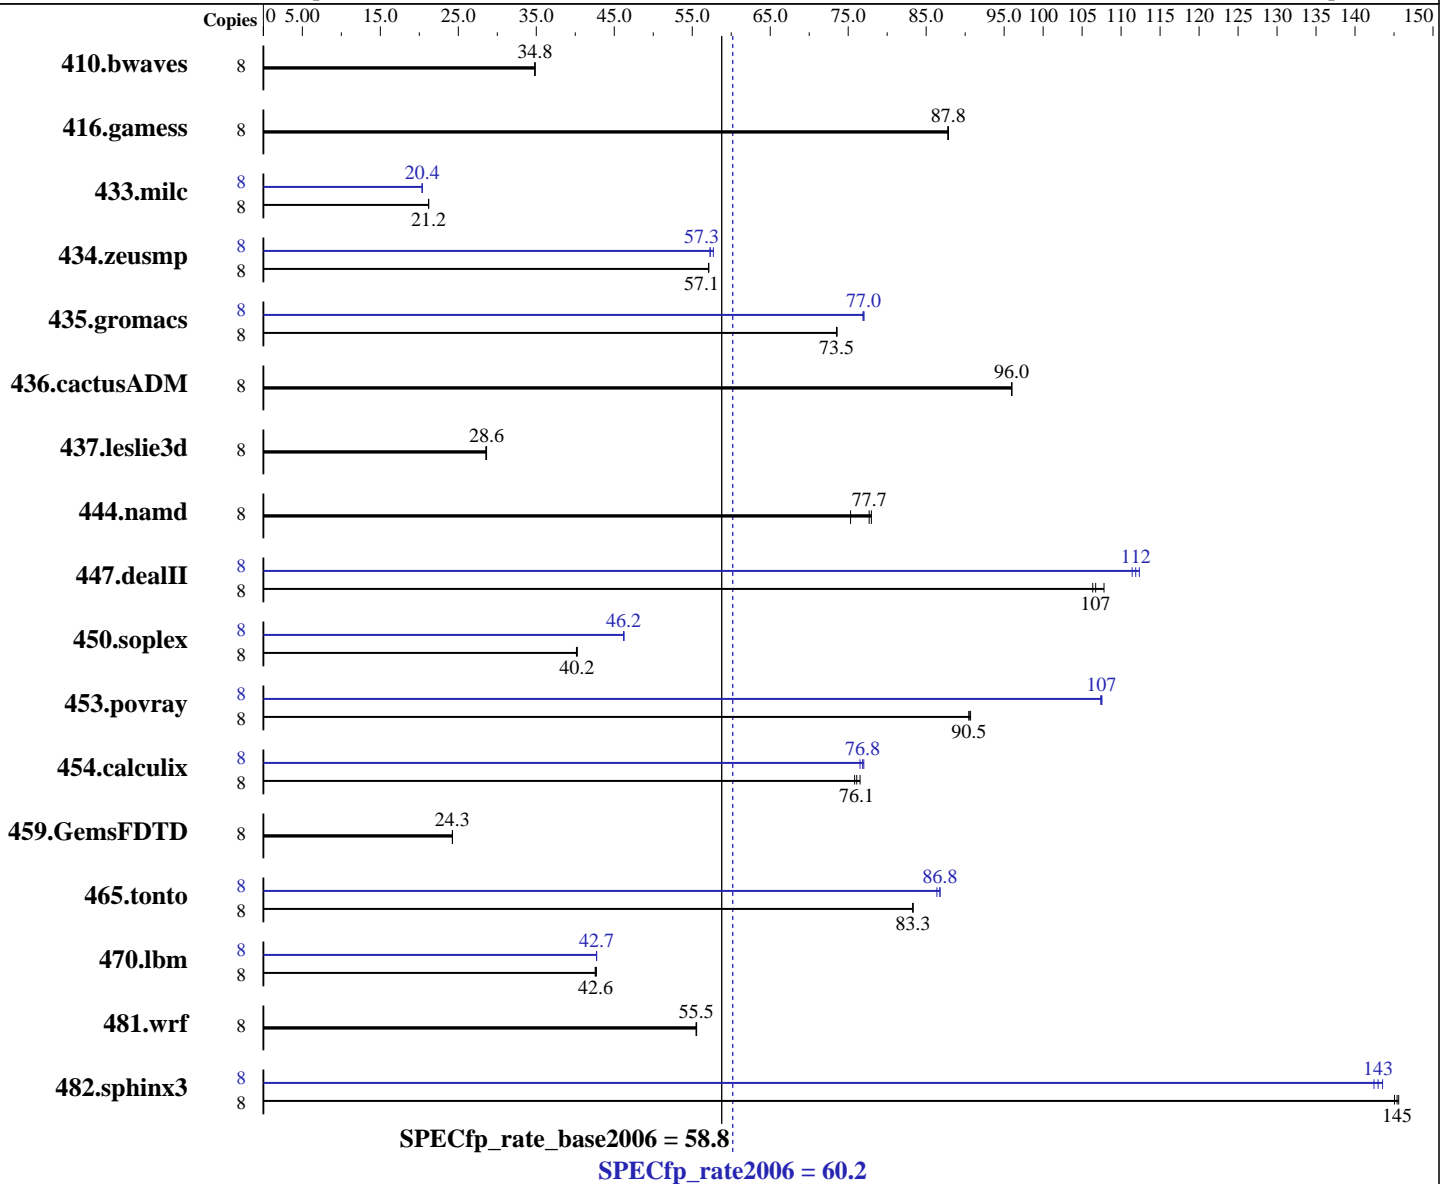

### Hardware

CPU Name: Intel Xeon 7140M  
 CPU Characteristics: 3.40 GHz, 800MHz bus  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
 CPU(s) orderable: 1,2,4 chips  
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86\_64  
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package-ID: l\_cc\_c\_9.1.049  
 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package ID: l\_fc\_c\_9.1.045  
 Auto Parallel: No  
 File System: ext2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/140Re-4  
(Intel Xeon processor 7140M)

SPECfp\_rate2006 = 60.2

SPECfp\_rate\_base2006 = 58.8

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Sep-2007  
Hardware Availability: Oct-2006  
Software Availability: Apr-2007

L3 Cache: 16 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (16x2 GB PC2-3200R, 2 rank, CL3-3-3, ECC)  
Disk Subsystem: 1x146.5 GB SAS, 15000RPM  
Other Hardware: None

System State: Multiuser, Runlevel 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	3120	34.8	<b>3120</b>	<b>34.8</b>	3125	34.8	8	3120	34.8	<b>3120</b>	<b>34.8</b>	3125	34.8		
416.gamess	8	1783	87.9	1785	87.8	<b>1783</b>	<b>87.8</b>	8	1783	87.9	1785	87.8	<b>1783</b>	<b>87.8</b>		
433.milc	8	<b>3465</b>	<b>21.2</b>	3468	21.2	3465	21.2	8	<b>3604</b>	<b>20.4</b>	3606	20.4	3604	20.4		
434.zeusmp	8	<b>1275</b>	<b>57.1</b>	1275	57.1	1275	57.1	8	1261	57.7	<b>1270</b>	<b>57.3</b>	1271	57.3		
435.gromacs	8	<b>777</b>	<b>73.5</b>	776	73.6	777	73.5	8	743	76.9	742	77.0	<b>742</b>	<b>77.0</b>		
436.cactusADM	8	996	96.0	<b>996</b>	<b>96.0</b>	996	96.0	8	996	96.0	<b>996</b>	<b>96.0</b>	996	96.0		
437.leslie3d	8	2636	28.5	<b>2628</b>	<b>28.6</b>	2627	28.6	8	2636	28.5	<b>2628</b>	<b>28.6</b>	2627	28.6		
444.namd	8	852	75.3	823	78.0	<b>826</b>	<b>77.7</b>	8	852	75.3	823	78.0	<b>826</b>	<b>77.7</b>		
447.dealII	8	860	106	849	108	<b>857</b>	<b>107</b>	8	821	111	<b>818</b>	<b>112</b>	815	112		
450.soplex	8	1658	40.2	<b>1659</b>	<b>40.2</b>	1662	40.1	8	1443	46.2	1444	46.2	<b>1444</b>	<b>46.2</b>		
453.povray	8	<b>470</b>	<b>90.5</b>	469	90.7	470	90.5	8	<b>396</b>	<b>107</b>	396	108	396	107		
454.calculix	8	<b>867</b>	<b>76.1</b>	870	75.8	862	76.5	8	863	76.5	<b>859</b>	<b>76.8</b>	857	77.0		
459.GemsFDTD	8	<b>3500</b>	<b>24.3</b>	3502	24.2	3499	24.3	8	<b>3500</b>	<b>24.3</b>	3502	24.2	3499	24.3		
465.tonto	8	<b>945</b>	<b>83.3</b>	945	83.3	945	83.3	8	<b>907</b>	<b>86.8</b>	907	86.8	911	86.4		
470.lbm	8	2573	42.7	<b>2580</b>	<b>42.6</b>	2583	42.6	8	2572	42.7	<b>2572</b>	<b>42.7</b>	2573	42.7		
481.wrf	8	1608	55.6	<b>1610</b>	<b>55.5</b>	1610	55.5	8	1608	55.6	<b>1610</b>	<b>55.5</b>	1610	55.5		
482.sphinx3	8	<b>1072</b>	<b>145</b>	1071	146	1075	145	8	1086	144	1095	142	<b>1091</b>	<b>143</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## General Notes

The system bus runs at 800 MHz

All binaries were built with 64-bit Intel compiler except:  
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with  
32-bit Intel compiler by changing the path for include and library files.

BIOS Configuration:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/140Re-4  
(Intel Xeon processor 7140M)

**SPECfp\_rate2006 = 60.2**

**SPECfp\_rate\_base2006 = 58.8**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Sep-2007  
**Hardware Availability:** Oct-2006  
**Software Availability:** Apr-2007

## General Notes (Continued)

Hyper-Threading Technology = Disabled

The Express5800/140Hf and the Express5800/140Re-4 models are electronically equivalent.  
The results have been measured on a Express5800/140Re-4 model.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/140Re-4  
(Intel Xeon processor 7140M)

**SPECfp\_rate2006 = 60.2**

**SPECfp\_rate\_base2006 = 58.8**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Sep-2007  
**Hardware Availability:** Oct-2006  
**Software Availability:** Apr-2007

## Base Optimization Flags (Continued)

C++ benchmarks:  
-fast

Fortran benchmarks:  
-fast

Benchmarks using both Fortran and C:  
-fast

## Peak Compiler Invocation

C benchmarks:  
/opt/intel/cc/9.1.049/bin/icc -I/opt/intel/cc/9.1.049/include  
-L/opt/intel/cc/9.1.049/lib

C++ benchmarks (except as noted below):  
icpc

450.soplex: /opt/intel/cc/9.1.049/bin/icpc  
-I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib

Fortran benchmarks (except as noted below):  
ifort

434.zeusmp: /opt/intel/fc/9.1.045/bin/ifort  
-I/opt/intel/fc/9.1.045/include -L/opt/intel/fc/9.1.045/lib

Benchmarks using both Fortran and C:  
icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/140Re-4  
(Intel Xeon processor 7140M)

**SPECfp\_rate2006 = 60.2**

**SPECfp\_rate\_base2006 = 58.8**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Sep-2007

**Hardware Availability:** Oct-2006

**Software Availability:** Apr-2007

## Peak Optimization Flags

C benchmarks:

433.milc: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

470.lbm: Same as 433.milc

482.sphinx3: -fast

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

Benchmarks using both Fortran and C:

435.gromacs: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-ic91-FP-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-ic91-FP-linux-flags.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/140Re-4  
(Intel Xeon processor 7140M)

**SPECfp\_rate2006 = 60.2**

**SPECfp\_rate\_base2006 = 58.8**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Sep-2007

**Hardware Availability:** Oct-2006

**Software Availability:** Apr-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 15:11:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 November 2007.