



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 138

ProLiant DL360 G5
(3.16 GHz, Intel Xeon processor X5460)

SPECint_rate_base2006 = 112

CPU2006 license: 3


Test date: Oct-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

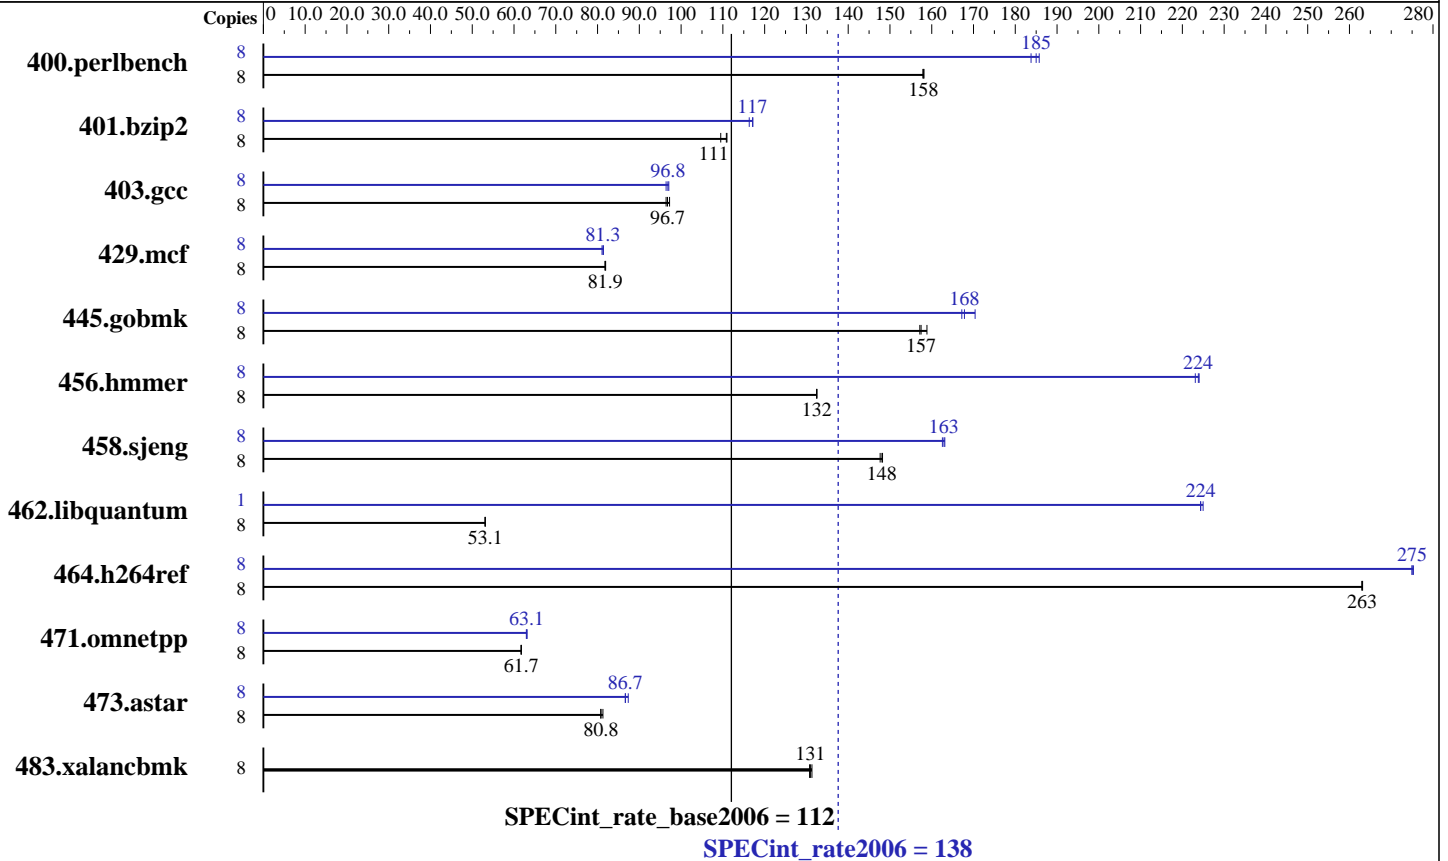

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics: 3.16 GHz, 2x6 MB L2 shared, 1333 MHz system bus
 CPU MHz: 3166
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F CL5)
 Disk Subsystem: 1x72 GB 15 K SAS
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1
 kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and
 Linux64 version 10.1
 Build 20070725
 Auto Parallel: Yes
 File System: ext2
 System State: Multi-user run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1
 binutils-2.17.50



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 138

ProLiant DL360 G5
(3.16 GHz, Intel Xeon processor X5460)

SPECint_rate_base2006 = 112

CPU2006 license: 3

Test date: Oct-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	495	158	494	158	495	158	8	425	184	422	185	421	186
401.bzip2	8	705	109	697	111	696	111	8	659	117	664	116	659	117
403.gcc	8	662	97.2	668	96.4	666	96.7	8	665	96.8	668	96.4	664	97.1
429.mcf	8	890	81.9	891	81.9	892	81.8	8	900	81.1	896	81.4	897	81.3
445.gobmk	8	533	157	528	159	534	157	8	493	170	502	167	500	168
456.hammer	8	563	132	563	132	563	132	8	333	224	335	223	333	224
458.sjeng	8	654	148	656	148	653	148	8	593	163	596	163	594	163
462.libquantum	8	3122	53.1	3122	53.1	3121	53.1	1	92.4	224	92.3	224	92.1	225
464.h264ref	8	673	263	673	263	673	263	8	643	275	644	275	644	275
471.omnetpp	8	810	61.7	810	61.7	810	61.7	8	794	63.0	793	63.1	792	63.1
473.astar	8	695	80.8	695	80.8	691	81.3	8	648	86.6	648	86.7	643	87.3
483.xalancbmk	8	422	131	422	131	420	131	8	422	131	422	131	420	131

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode
Adjacent Sector Prefetch Disabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 138

ProLiant DL360 G5
(3.16 GHz, Intel Xeon processor X5460)

SPECint_rate_base2006 = 112

CPU2006 license: 3

Test date: Oct-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 138

ProLiant DL360 G5
(3.16 GHz, Intel Xeon processor X5460)

SPECint_rate_base2006 = 112

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G5
(3.16 GHz, Intel Xeon processor X5460)

SPECint_rate2006 = 138

SPECint_rate_base2006 = 112

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:41:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 November 2007.