



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor 5160)

SPECint[®]2006 = 20.7

SPECint_base2006 = 18.9

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Oct-2007

Hardware Availability: May-2007

Software Availability: Jun-2007

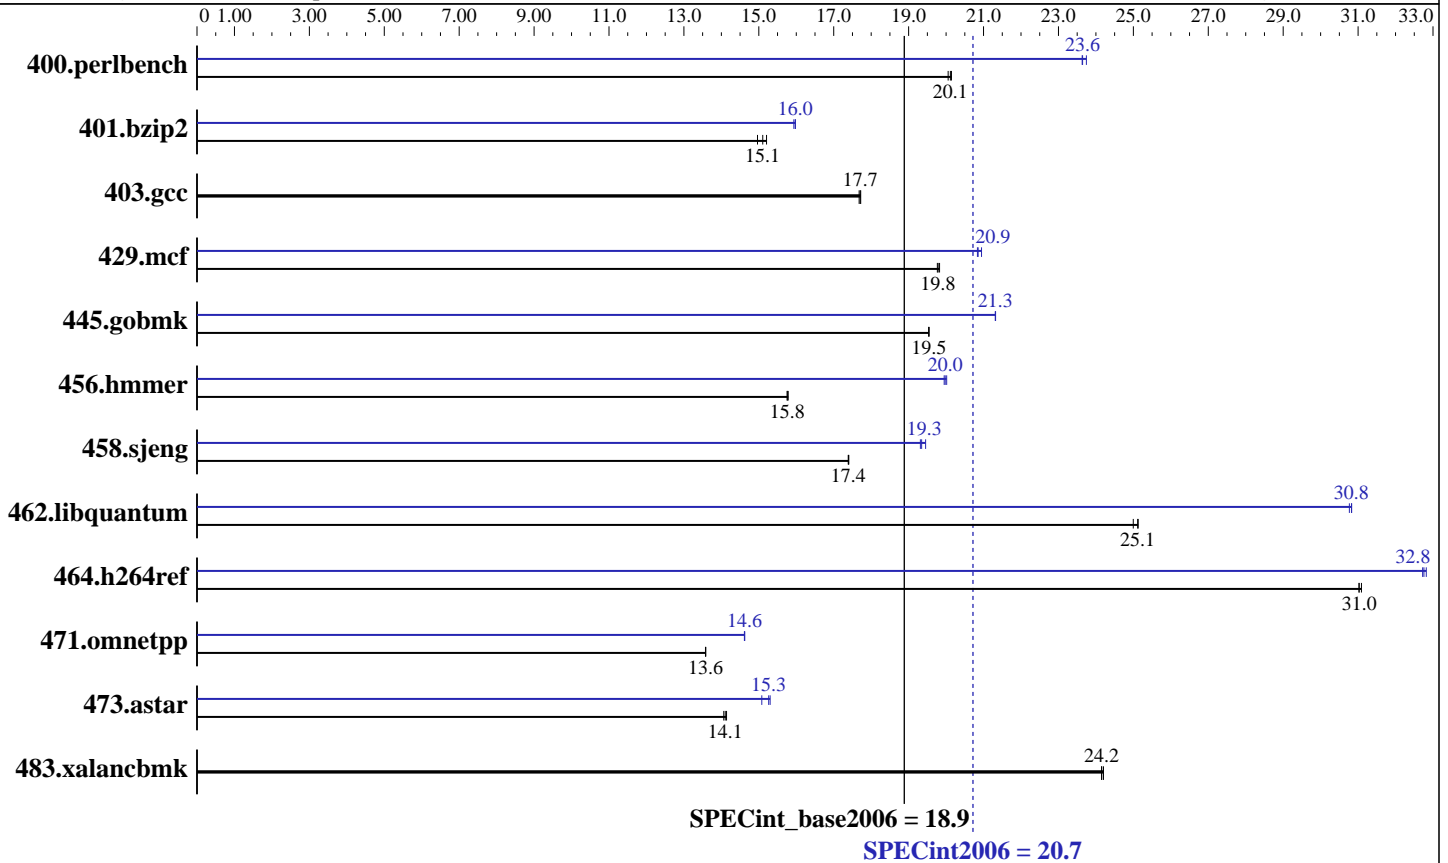

Hardware

CPU Name: Intel Xeon 5160
 CPU Characteristics: 3.00 GHz, 4 MB L2, 1333 MHz bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x146.5 GB SAS, 10000RPM
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp for x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070426 Package ID: l_cc_p_10.0.023
 Auto Parallel: No
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor 5160)

SPECint2006 = **20.7**

SPECint_base2006 = **18.9**

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: May-2007
Software Availability: Jun-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	486	20.1	485	20.1	487	20.1	413	23.6	411	23.7	413	23.6
401.bzip2	645	15.0	635	15.2	639	15.1	604	16.0	604	16.0	606	15.9
403.gcc	455	17.7	455	17.7	454	17.7	455	17.7	455	17.7	454	17.7
429.mcf	460	19.8	461	19.8	461	19.8	438	20.8	437	20.9	435	20.9
445.gobmk	537	19.5	537	19.5	537	19.5	492	21.3	492	21.3	492	21.3
456.hmmer	592	15.8	591	15.8	592	15.8	466	20.0	468	19.9	467	20.0
458.sjeng	696	17.4	695	17.4	696	17.4	625	19.3	622	19.5	627	19.3
462.libquantum	825	25.1	829	25.0	825	25.1	673	30.8	672	30.8	672	30.8
464.h264ref	712	31.1	713	31.0	713	31.0	676	32.7	676	32.8	674	32.8
471.omnetpp	460	13.6	460	13.6	460	13.6	428	14.6	427	14.6	428	14.6
473.astar	497	14.1	498	14.1	499	14.1	460	15.3	466	15.1	459	15.3
483.xalancbmk	286	24.2	285	24.2	286	24.2	286	24.2	285	24.2	286	24.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor 5160)

SPECint2006 = 20.7

SPECint_base2006 = 18.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Oct-2007

Hardware Availability: May-2007

Software Availability: Jun-2007

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

456.hmmer: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor 5160)

SPECint2006 = 20.7

SPECint_base2006 = 18.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Oct-2007

Hardware Availability: May-2007

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec_div -ansi-alias

456.hmmer: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -Ob0
-prefetch -opt-streaming-stores always

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec_div -ansi-alias -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-ic10-INT-ia32-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-ic10-INT-ia32-intel64-linux-flags.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon processor 5160)

SPECint2006 = 20.7

SPECint_base2006 = 18.9

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: May-2007
Software Availability: Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:31:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.