



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5405,
2.00 GHz)

SPECint®2006 = 19.1

SPECint_base2006 = 16.6

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

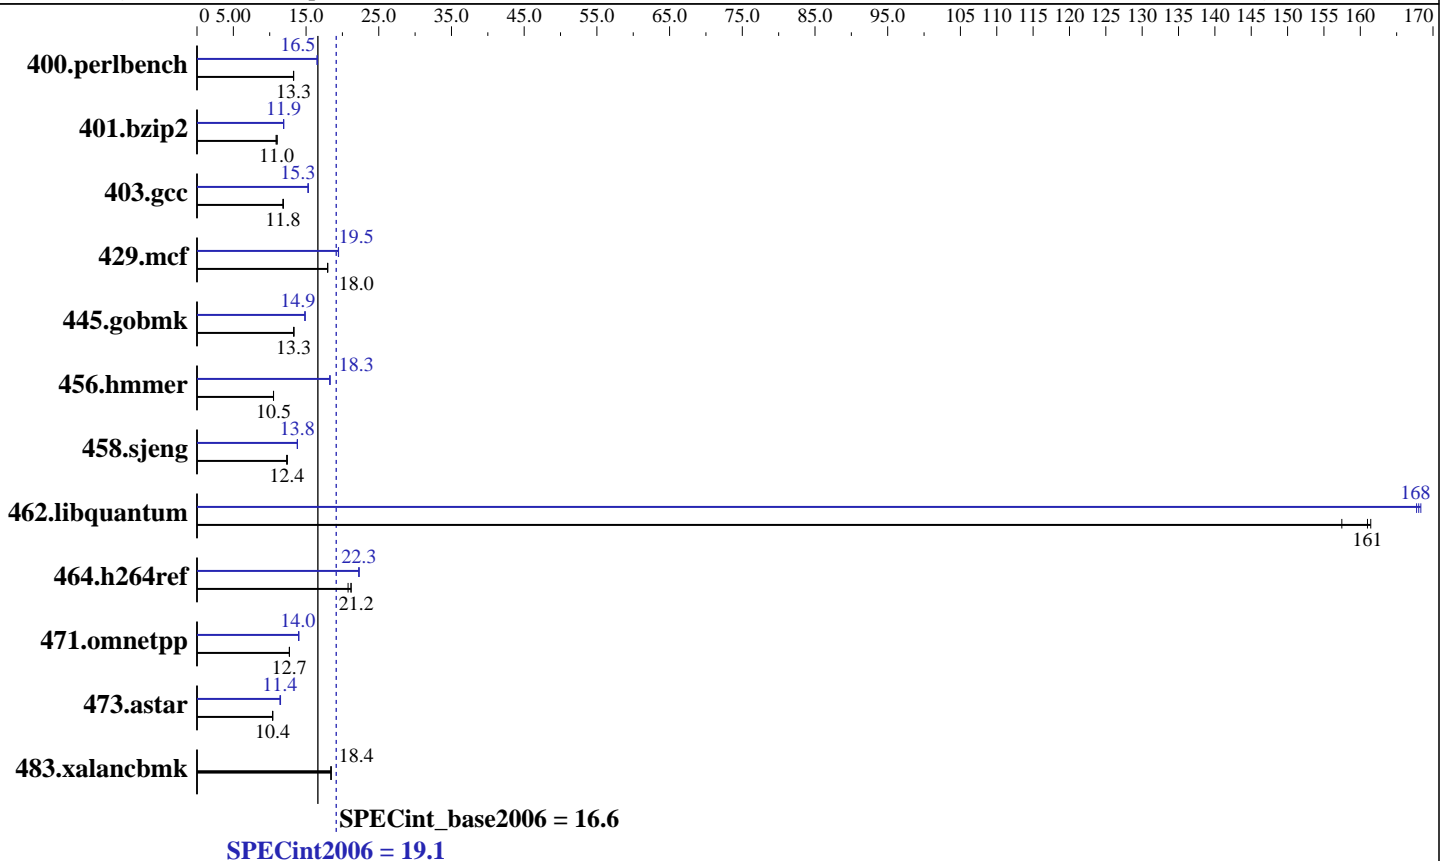

Hardware

CPU Name: Intel Xeon E5405
 CPU Characteristics: Quad Core, 2.00 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 * 2GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x73GB Seagate ST37330LC SCSI 10K RPM
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10 SP1 RC1, Kernel linux-cbgn 2.6.16.43-0.5-smp for x86_64
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap library V8.1 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5405,
2.00
GHz)

SPECint2006 = 19.1

SPECint_base2006 = 16.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	736	13.3	734	13.3	736	13.3	591	16.5	591	16.5	591	16.5
401.bzip2	887	10.9	880	11.0	875	11.0	809	11.9	811	11.9	809	11.9
403.gcc	677	11.9	681	11.8	679	11.8	526	15.3	526	15.3	527	15.3
429.mcf	508	18.0	507	18.0	508	18.0	469	19.4	468	19.5	469	19.5
445.gobmk	788	13.3	788	13.3	788	13.3	706	14.9	706	14.9	706	14.9
456.hmmer	886	10.5	886	10.5	887	10.5	510	18.3	510	18.3	510	18.3
458.sjeng	974	12.4	980	12.4	979	12.4	877	13.8	876	13.8	876	13.8
462.libquantum	132	157	128	161	129	161	123	168	123	168	124	168
464.h264ref	1045	21.2	1065	20.8	1044	21.2	993	22.3	993	22.3	994	22.3
471.omnetpp	491	12.7	492	12.7	492	12.7	447	14.0	447	14.0	446	14.0
473.astar	675	10.4	673	10.4	675	10.4	611	11.5	614	11.4	614	11.4
483.xalanbmk	374	18.4	374	18.5	375	18.4	374	18.4	374	18.5	375	18.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Bios settings:

Hardware Prefetcher: Enabled

Adjacent Sector Prefetch: Enabled

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalanbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5405,
2.00
GHz)

SPECint2006 = 19.1

SPECint_base2006 = 16.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

`-fast -vec-guard-write -parallel -par-runtime-control`

C++ benchmarks:

`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmarheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc`

`401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include`

`456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include`

C++ benchmarks:

`icpc`

Peak Portability Flags

`400.perlbenc: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5405,
2.00
GHz)

SPECint2006 = 19.1

SPECint_base2006 = 16.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5405,
2.00
GHz)

SPECint2006 = 19.1

SPECint_base2006 = 16.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.36.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.36.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:38:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 December 2007.