



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp[®]_rate2006 = 42.3

PRIMERGY RX100 S5, Intel Xeon X3220, 2.40 GHz

SPECfp_rate_base2006 = 39.6

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

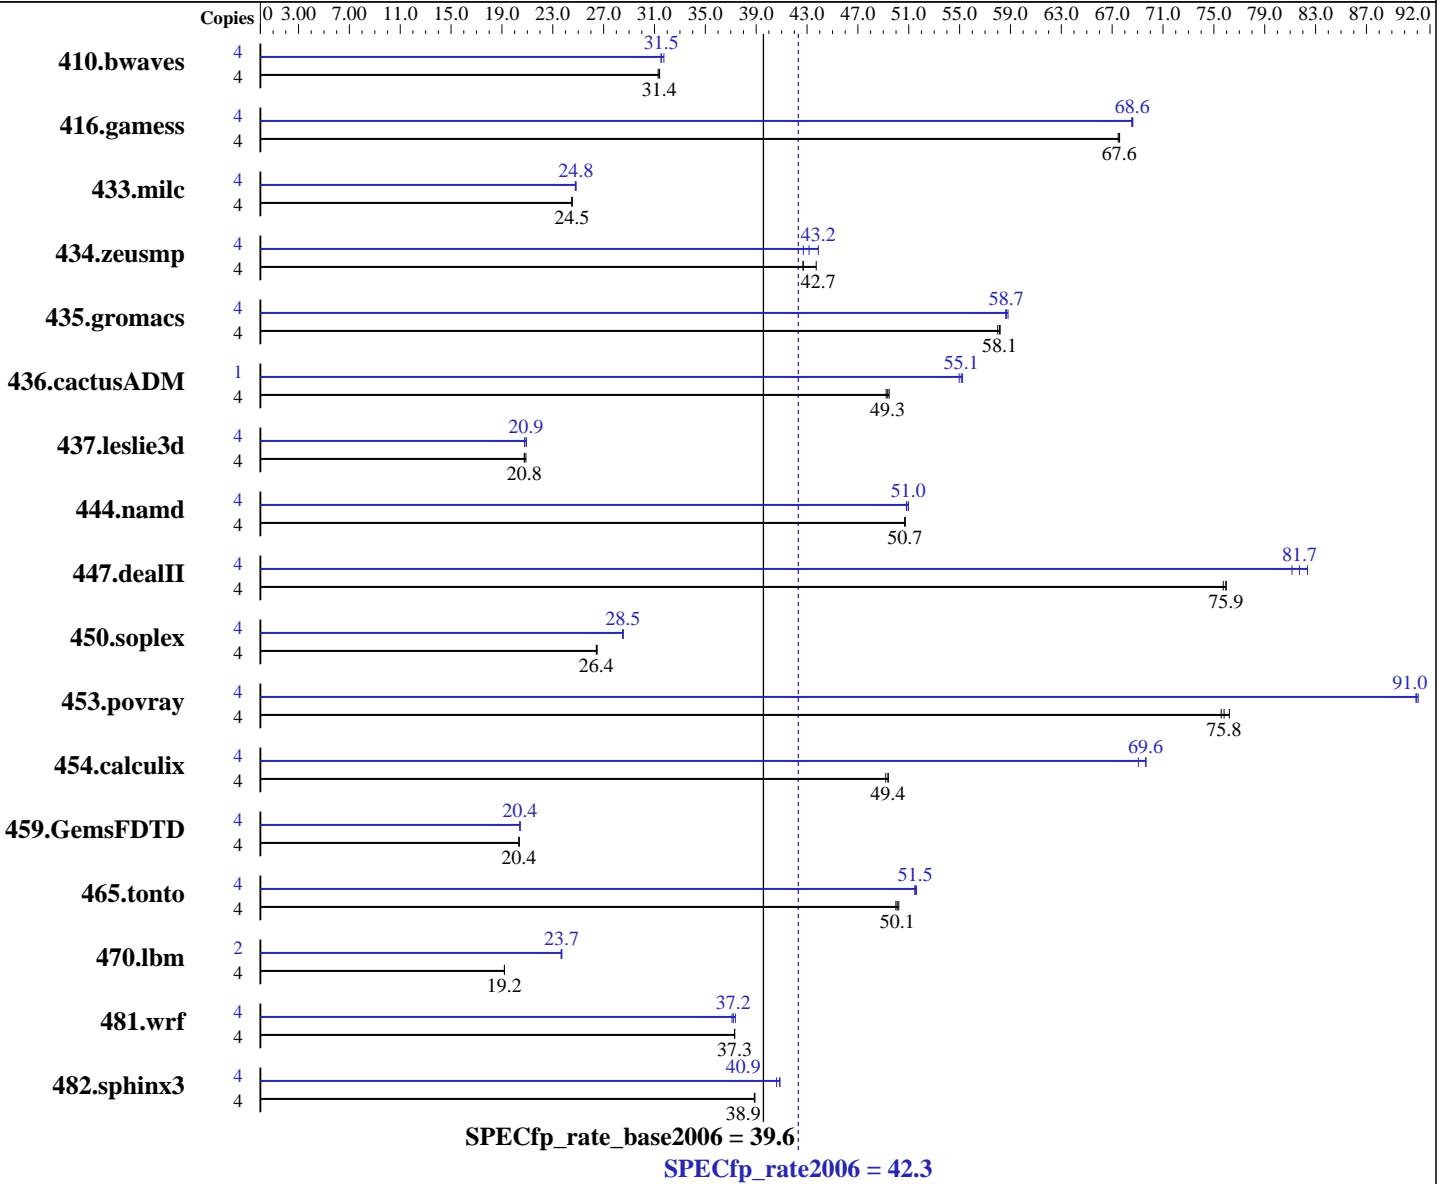

Hardware

CPU Name: Intel Xeon X3220
 CPU Characteristics: 1066 MHz system bus
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
 Auto Parallel: Yes
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = **42.3**

PRIMERGY RX100 S5, Intel Xeon X3220, 2.40 GHz

SPECfp_rate_base2006 = **39.6**

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jan-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CAS 6-6-6, with ECC)
Disk Subsystem: Western Digital WD5000AAKS (SATA, 500GB, 7200rpm)
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: binutils-2.17.tar.gz, Version 2.17

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1731	31.4	1733	31.4	1738	31.3	4	1724	31.5	1713	31.7	1725	31.5
416.gamess	4	1159	67.6	1159	67.6	1161	67.5	4	1141	68.6	1142	68.6	1143	68.5
433.milc	4	1499	24.5	1498	24.5	1497	24.5	4	1479	24.8	1480	24.8	1482	24.8
434.zeusmp	4	853	42.7	833	43.7	853	42.7	4	843	43.2	829	43.9	852	42.7
435.gromacs	4	492	58.0	491	58.2	491	58.1	4	487	58.6	486	58.8	487	58.7
436.cactusADM	4	967	49.5	969	49.3	971	49.2	1	217	55.1	217	55.0	216	55.2
437.leslie3d	4	1800	20.9	1811	20.8	1810	20.8	4	1799	20.9	1797	20.9	1810	20.8
444.namd	4	633	50.7	633	50.7	633	50.7	4	629	51.0	631	50.8	629	51.0
447.dealII	4	603	75.9	602	76.0	604	75.7	4	556	82.4	564	81.1	560	81.7
450.soplex	4	1259	26.5	1262	26.4	1262	26.4	4	1170	28.5	1170	28.5	1169	28.5
453.povray	4	281	75.8	282	75.6	279	76.2	4	234	90.9	234	91.1	234	91.0
454.calculix	4	668	49.4	668	49.4	671	49.2	4	478	69.1	474	69.7	474	69.6
459.GemsFDTD	4	2087	20.3	2085	20.4	2085	20.4	4	2078	20.4	2079	20.4	2077	20.4
465.tonto	4	787	50.0	784	50.2	786	50.1	4	763	51.6	765	51.5	764	51.5
470.lbm	4	2862	19.2	2863	19.2	2863	19.2	2	1159	23.7	1162	23.7	1159	23.7
481.wrf	4	1198	37.3	1197	37.3	1198	37.3	4	1204	37.1	1196	37.4	1201	37.2
482.sphinx3	4	2005	38.9	2005	38.9	2007	38.9	4	1908	40.9	1908	40.9	1920	40.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'OMP_NUM_THREADS' set to number of cores (default)
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 64-bit Intel compiler except:
437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with 32-bit Intel compiler by changing the path for include and library files.

BIOS configuration:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 42.3

PRIMERGY RX100 S5, Intel Xeon X3220, 2.40 GHz

SPECfp_rate_base2006 = 39.6

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jan-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

General Notes (Continued)

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 42.3

PRIMERGY RX100 S5, Intel Xeon X3220, 2.40 GHz

SPECfp_rate_base2006 = 39.6

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jan-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 42.3

PRIMERGY RX100 S5, Intel Xeon X3220, 2.40 GHz

SPECfp_rate_base2006 = 39.6

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jan-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 42.3

PRIMERGY RX100 S5, Intel Xeon X3220, 2.40 GHz

SPECfp_rate_base2006 = 39.6

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:33:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.