



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 82.3

IBM System x3655 (AMD Opteron 2352)

SPECfp_rate_base2006 = 74.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

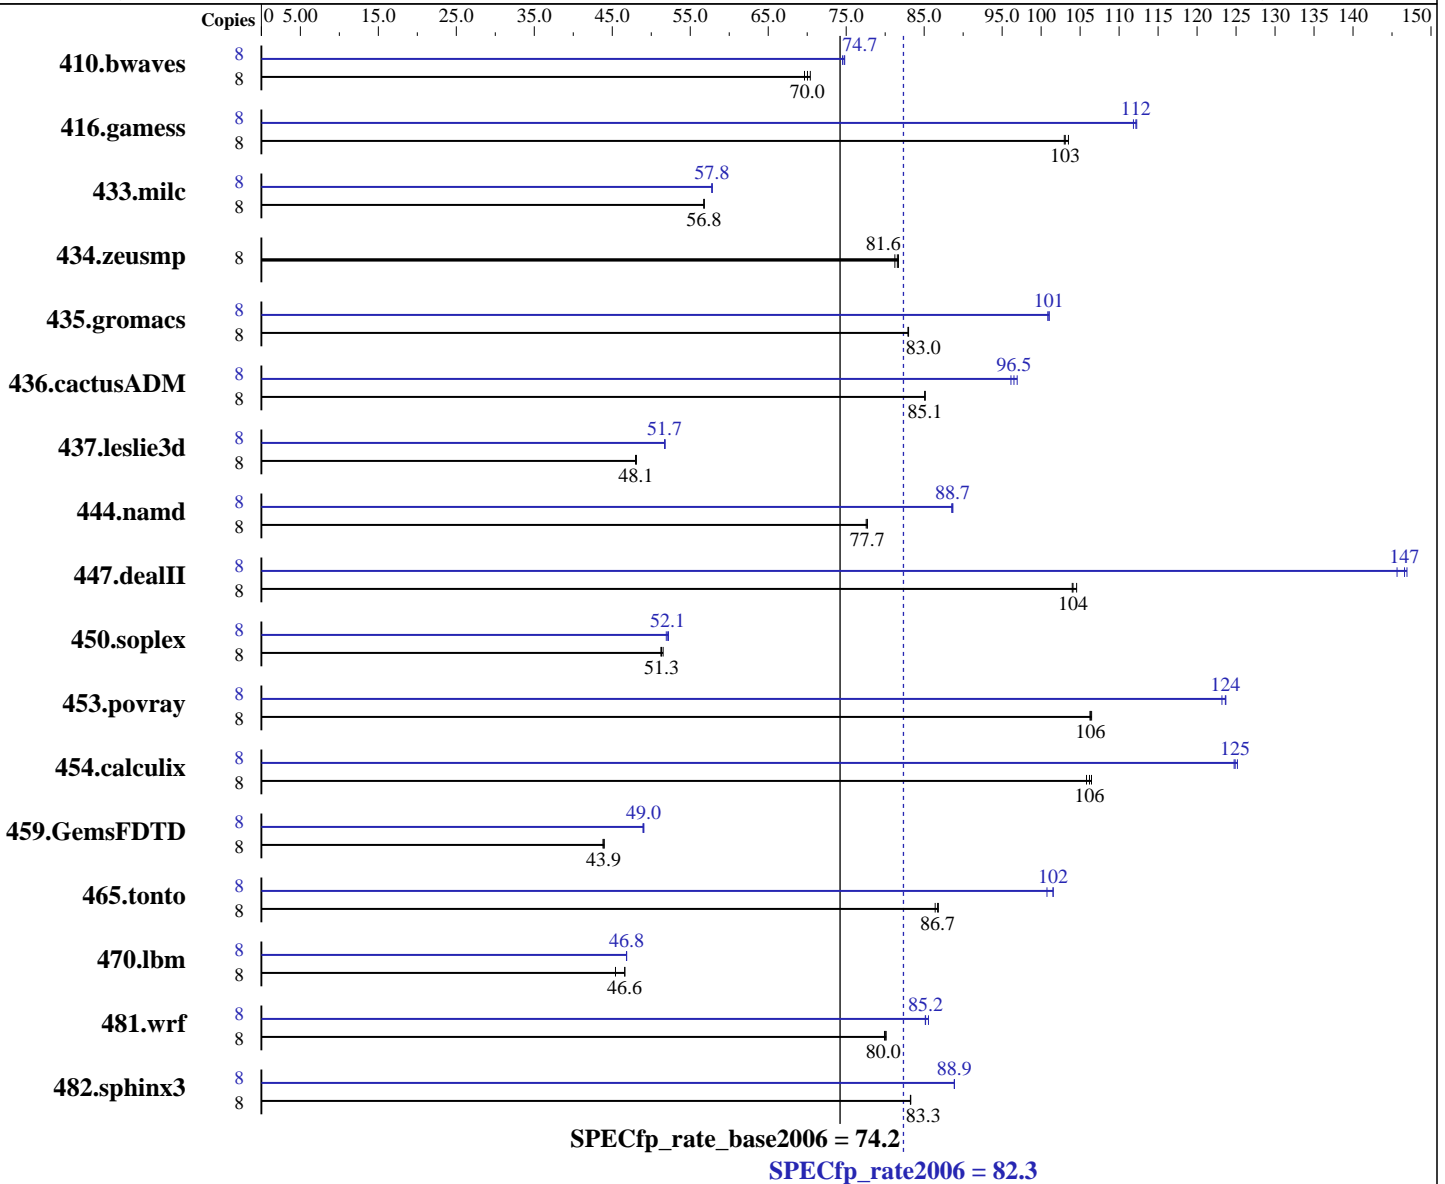

Hardware

CPU Name: AMD Opteron 2352
 CPU Characteristics: 2100
 CPU MHz: Integrated
 FPU: 8 cores, 2 chips, 4 cores/chip
 CPU(s) enabled: 1,2 chips
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 512 KB I+D on chip per core
 Secondary Cache:

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ext3
 System State: Runlevel 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 82.3

IBM System x3655 (AMD Opteron 2352)

SPECfp_rate_base2006 = 74.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (8 x 2 GB, DDR2-667 CL5 Reg Dual Rank)
Disk Subsystem: 1 x 73.4 GB SAS, 15000 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1561	69.7	1544	70.4	<u>1552</u>	<u>70.0</u>	8	1453	74.8	<u>1455</u>	<u>74.7</u>	1459	74.5
416.gamess	8	1521	103	1513	104	<u>1519</u>	<u>103</u>	8	<u>1397</u>	<u>112</u>	1401	112	1395	112
433.milc	8	<u>1294</u>	<u>56.8</u>	1294	56.8	1293	56.8	8	1270	57.8	1271	57.8	<u>1271</u>	<u>57.8</u>
434.zeusmp	8	<u>893</u>	<u>81.6</u>	891	81.7	896	81.2	8	<u>893</u>	<u>81.6</u>	891	81.7	896	81.2
435.gromacs	8	688	83.0	<u>689</u>	<u>83.0</u>	689	82.9	8	566	101	<u>566</u>	<u>101</u>	565	101
436.cactusADM	8	1124	85.1	1123	85.1	<u>1124</u>	<u>85.1</u>	8	994	96.1	986	96.9	<u>990</u>	<u>96.5</u>
437.leslie3d	8	<u>1565</u>	<u>48.1</u>	1564	48.1	1567	48.0	8	1454	51.7	1453	51.8	<u>1454</u>	<u>51.7</u>
444.namd	8	827	77.6	826	77.7	<u>826</u>	<u>77.7</u>	8	725	88.5	724	88.7	<u>724</u>	<u>88.7</u>
447.dealII	8	<u>879</u>	<u>104</u>	880	104	875	105	8	<u>624</u>	<u>147</u>	628	146	623	147
450.soplex	8	1302	51.2	<u>1300</u>	<u>51.3</u>	1295	51.5	8	1278	52.2	<u>1280</u>	<u>52.1</u>	1285	51.9
453.povray	8	401	106	400	106	<u>400</u>	<u>106</u>	8	345	123	<u>344</u>	<u>124</u>	344	124
454.calculix	8	620	106	<u>621</u>	<u>106</u>	624	106	8	527	125	<u>528</u>	<u>125</u>	529	125
459.GemsFDTD	8	1930	44.0	<u>1933</u>	<u>43.9</u>	1938	43.8	8	1730	49.1	1734	48.9	<u>1732</u>	<u>49.0</u>
465.tonto	8	907	86.8	911	86.4	<u>908</u>	<u>86.7</u>	8	781	101	<u>775</u>	<u>102</u>	775	102
470.lbm	8	2420	45.4	2358	46.6	<u>2359</u>	<u>46.6</u>	8	2346	46.8	<u>2347</u>	<u>46.8</u>	2348	46.8
481.wrf	8	1115	80.1	<u>1117</u>	<u>80.0</u>	1118	79.9	8	1049	85.1	<u>1049</u>	<u>85.2</u>	1045	85.6
482.sphinx3	8	1873	83.2	<u>1873</u>	<u>83.3</u>	1872	83.3	8	1755	88.9	<u>1754</u>	<u>88.9</u>	1754	88.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 82.3

IBM System x3655 (AMD Opteron 2352)

SPECfp_rate_base2006 = 74.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Msmartalloc=huge:150 -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:
-fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 82.3

IBM System x3655 (AMD Opteron 2352)

SPECfp_rate_base2006 = 74.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

470.lbm: pathcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -Mnomain

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 82.3

IBM System x3655 (AMD Opteron 2352)

SPECfp_rate_base2006 = 74.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

470.lbm: -march=barcelona -Ofast -CG:sse_cse_regs=0
-CG:locs_shallow_depth=1 -m3dnow

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge:150 -Mnodepchk -Mfprelaxed --zc_eh
-tp barcelona-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -TENV:frame_pointer=off
-LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0 -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast

```

Fortran benchmarks:

```

410.bwaves: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -Mpre -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 82.3

IBM System x3655 (AMD Opteron 2352)

SPECfp_rate_base2006 = 74.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: basepeak = yes

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge:150 -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mfpapprox=rsqrt
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Msmartalloc=huge:150 -Mprefetch=t0 -Mpre -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc
-Mprefetch=distance:8 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

Peak Other Flags

C benchmarks (except as noted below):
-Mipa=jobs:4(pass 2)

470.lbm: No flags used

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 82.3

IBM System x3655 (AMD Opteron 2352)

SPECfp_rate_base2006 = 74.2

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Other Flags (Continued)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

436.cactusADM: No flags used

481.wrf: No flags used

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:31:30 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 July 2008.