



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®2006 = 21.7

ProLiant DL165 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.4

CPU2006 license: 3


Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2009

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

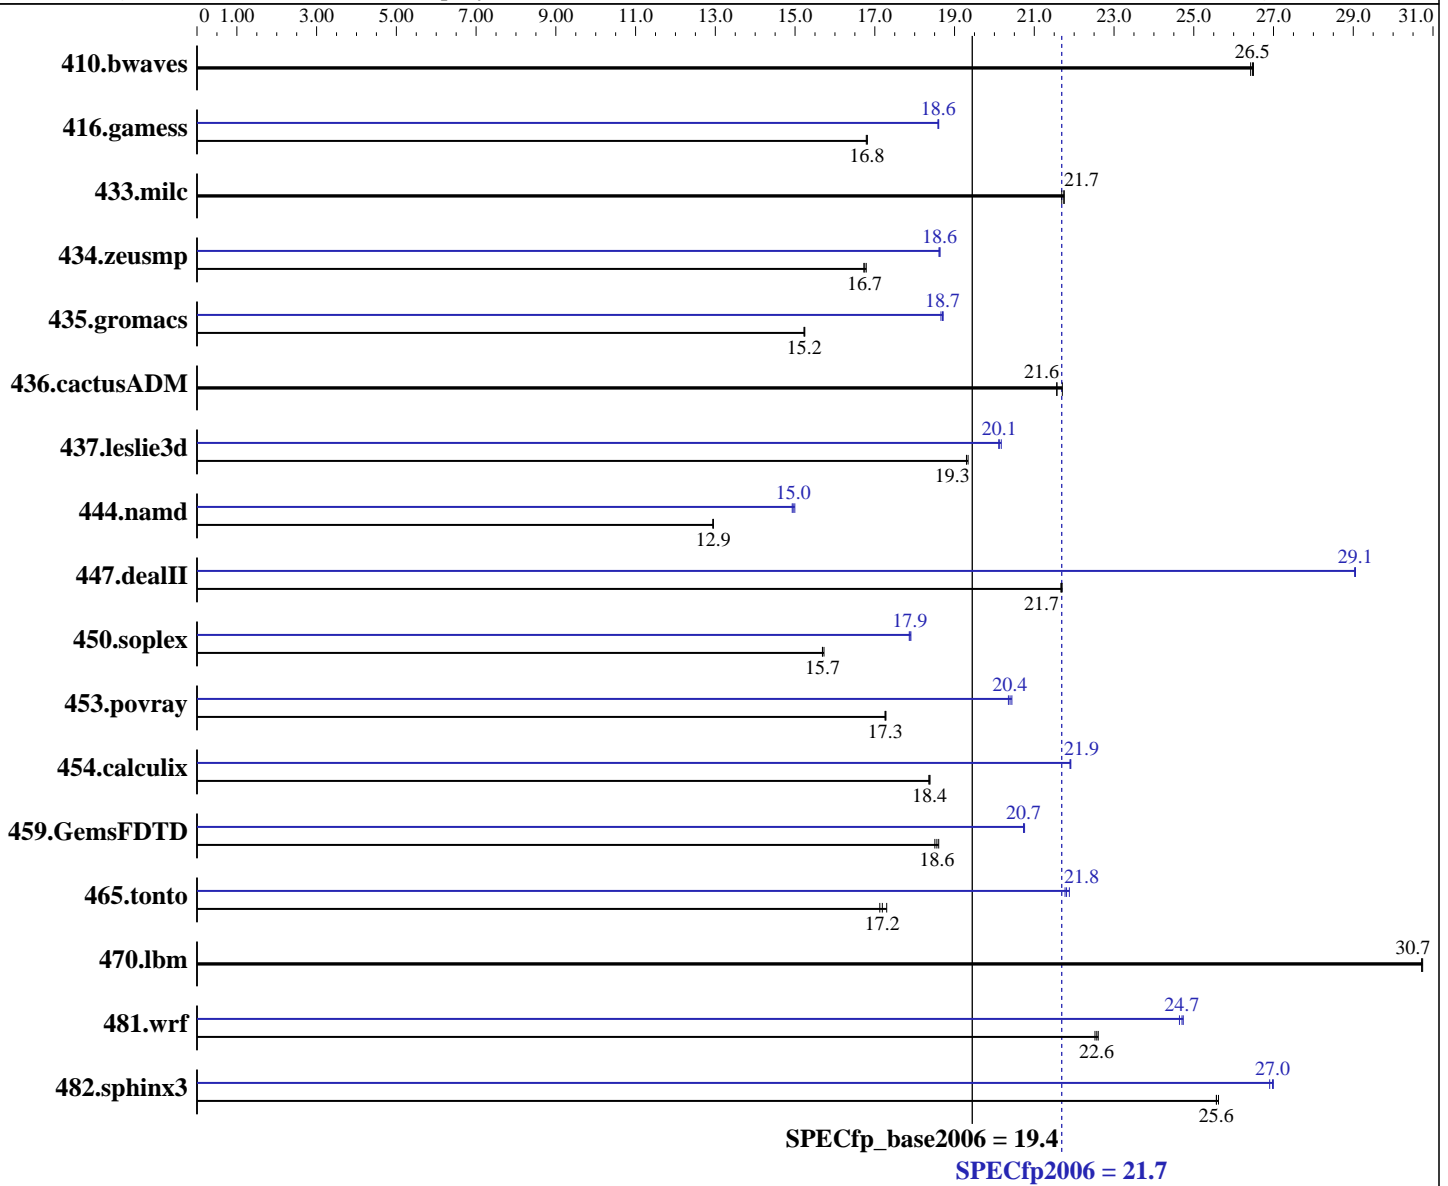

Hardware

CPU Name: AMD Opteron 2384
 CPU Characteristics:
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1,
Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **21.7**

ProLiant DL165 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = **19.4**

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2009

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, PC2-6400P CL5)
Disk Subsystem: 1x250 GB 10 K SAS
Other Hardware: None

Other Software: binutils 2.17.50
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	514	26.4	513	26.5	513	26.5	514	26.4	513	26.5	513	26.5
416.gamess	1166	16.8	1165	16.8	1165	16.8	1053	18.6	1054	18.6	1052	18.6
433.milc	422	21.8	422	21.7	423	21.7	422	21.8	422	21.7	423	21.7
434.zeusmp	544	16.7	543	16.7	542	16.8	489	18.6	488	18.6	488	18.6
435.gromacs	468	15.2	469	15.2	469	15.2	382	18.7	382	18.7	383	18.7
436.cactusADM	554	21.6	554	21.6	551	21.7	554	21.6	554	21.6	551	21.7
437.leslie3d	487	19.3	486	19.3	487	19.3	466	20.2	467	20.1	467	20.1
444.namd	619	12.9	619	13.0	620	12.9	536	15.0	537	14.9	535	15.0
447.dealII	528	21.7	527	21.7	528	21.7	394	29.1	394	29.1	394	29.0
450.soplex	530	15.7	532	15.7	532	15.7	467	17.9	466	17.9	466	17.9
453.povray	308	17.3	308	17.3	308	17.3	260	20.4	261	20.4	261	20.4
454.calculix	449	18.4	449	18.4	449	18.4	376	21.9	377	21.9	377	21.9
459.GemsFDTD	572	18.6	570	18.6	573	18.5	512	20.7	512	20.7	511	20.8
465.tonto	575	17.1	569	17.3	572	17.2	450	21.9	452	21.8	451	21.8
470.lbm	447	30.7	447	30.7	447	30.7	447	30.7	447	30.7	447	30.7
481.wrf	494	22.6	496	22.5	495	22.6	452	24.7	452	24.7	453	24.6
482.sphinx3	762	25.6	762	25.6	761	25.6	722	27.0	724	26.9	722	27.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 3584.
NCPUS set to number of cores



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.7

ProLiant DL165 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.4

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2009

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.7

ProLiant DL165 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.4

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2009

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Base Optimization Flags (Continued)

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.7

ProLiant DL165 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.4

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2009

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Compiler Invocation (Continued)

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2)
 -Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
 -Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk
 -Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
 -fno-exceptions -m32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.7

ProLiant DL165 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.4

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2009

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.7

ProLiant DL165 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.4

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2009

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2)
 -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
 -Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
 -LNO:prefetch_ahead=10 -LANG:copyinout=off
 -IPA:callee_limit=5000 -GRA:prioritize_by_density=on
 -OPT:malloc_alg=1 -m3dnow
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
 -L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL165 G5p
(2.7 GHz AMD Opteron 2384)

SPECfp2006 = 21.7

SPECfp_base2006 = 19.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2008
Hardware Availability: Jan-2009
Software Availability: Jun-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:41:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 February 2009.