



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 168

PRIMERGY RX300 S5, Intel Xeon E5540, 2.53 GHz

SPECfp_rate_base2006 = 162

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu Siemens Computers

Test date: Feb-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

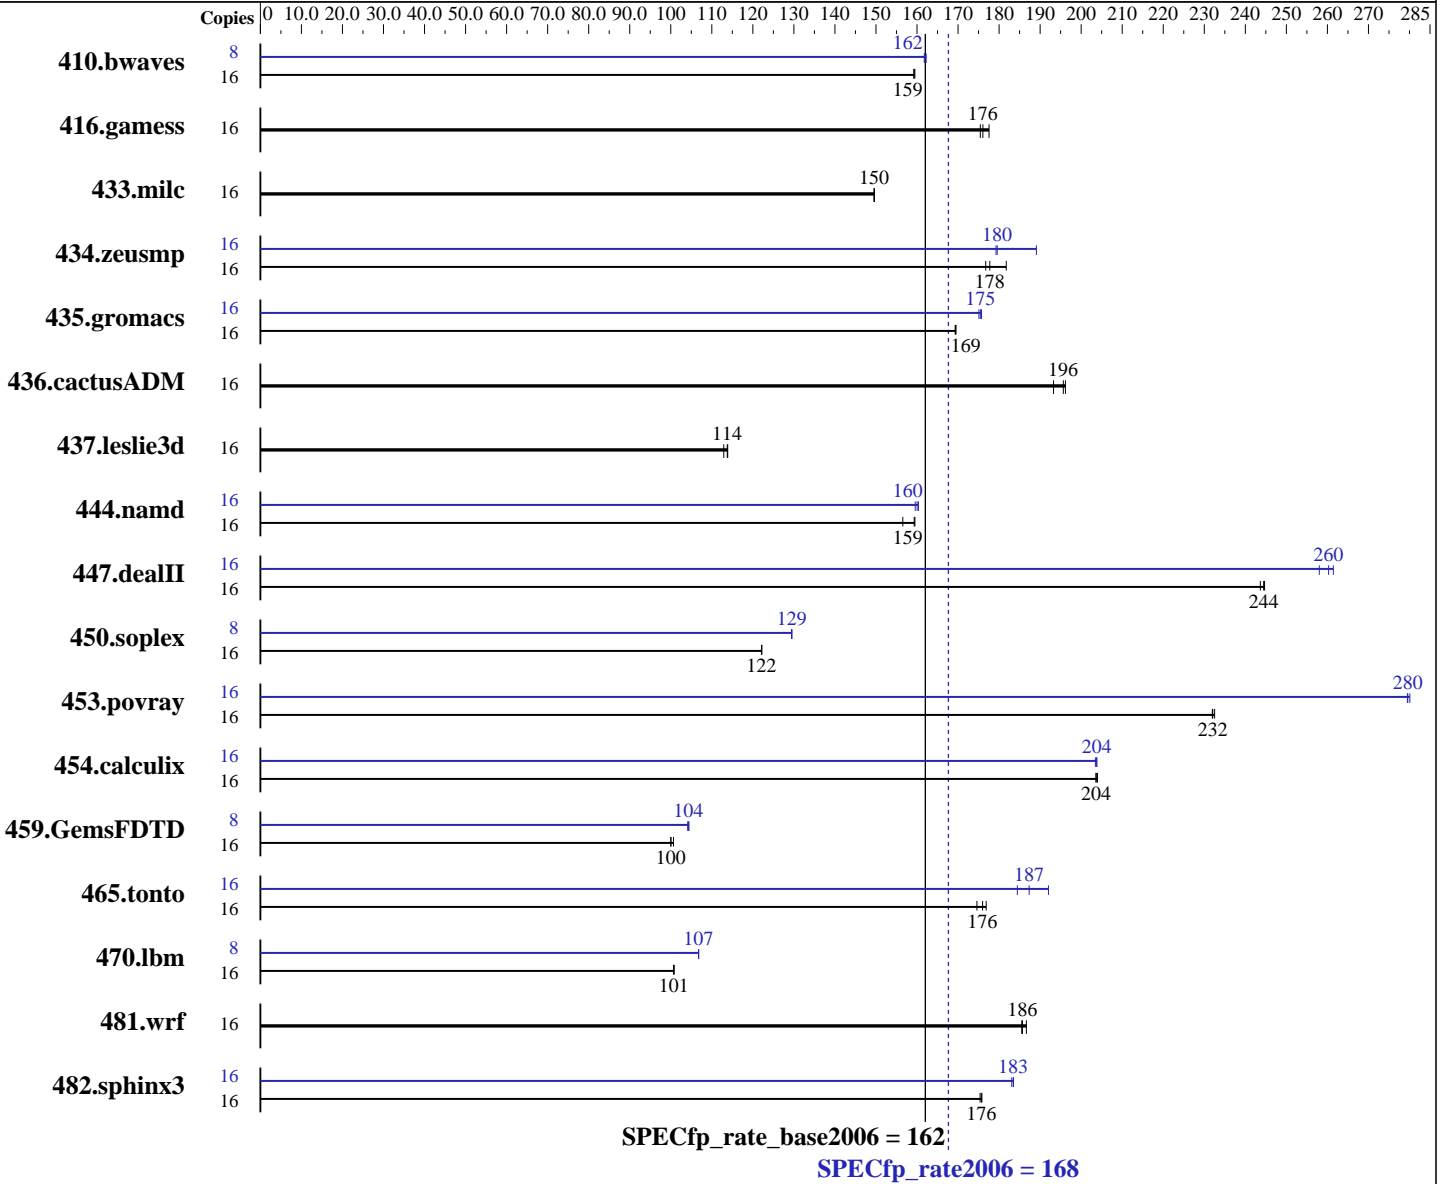

Hardware

CPU Name: Intel Xeon E5540
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smpp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 168

PRIMERGY RX300 S5, Intel Xeon E5540, 2.53 GHz

SPECfp_rate_base2006 = 162

CPU2006 license: 19

Test date: Feb-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)
Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<u>1365</u>	<u>159</u>	1363	159	1366	159	8	<u>671</u>	<u>162</u>	670	162	672	162
416.gamess	16	1786	175	<u>1779</u>	<u>176</u>	1764	178	16	1786	175	<u>1779</u>	<u>176</u>	1764	178
433.milc	16	<u>982</u>	<u>150</u>	982	150	982	150	16	<u>982</u>	<u>150</u>	982	150	982	150
434.zeusmp	16	801	182	824	177	<u>819</u>	<u>178</u>	16	770	189	<u>811</u>	<u>180</u>	812	179
435.gromacs	16	<u>674</u>	<u>169</u>	675	169	674	169	16	650	176	652	175	<u>651</u>	<u>175</u>
436.cactusADM	16	<u>977</u>	<u>196</u>	975	196	989	193	16	<u>977</u>	<u>196</u>	975	196	989	193
437.leslie3d	16	1332	113	1321	114	<u>1322</u>	<u>114</u>	16	1332	113	1321	114	<u>1322</u>	<u>114</u>
444.namd	16	<u>805</u>	<u>159</u>	820	157	805	159	16	804	160	800	160	<u>802</u>	<u>160</u>
447.dealII	16	751	244	748	245	<u>749</u>	<u>244</u>	16	709	258	700	261	<u>703</u>	<u>260</u>
450.soplex	16	<u>1093</u>	<u>122</u>	1092	122	1093	122	8	515	130	<u>515</u>	<u>129</u>	516	129
453.povray	16	<u>367</u>	<u>232</u>	366	233	367	232	16	304	280	305	279	<u>304</u>	<u>280</u>
454.calculix	16	647	204	648	204	<u>648</u>	<u>204</u>	16	649	203	648	204	<u>648</u>	<u>204</u>
459.GemsFDTD	16	1697	100	1687	101	<u>1697</u>	<u>100</u>	8	815	104	813	104	<u>813</u>	<u>104</u>
465.tonto	16	890	177	<u>895</u>	<u>176</u>	902	175	16	854	184	<u>840</u>	<u>187</u>	820	192
470.lbm	16	2180	101	<u>2182</u>	<u>101</u>	2184	101	8	1030	107	<u>1029</u>	<u>107</u>	1029	107
481.wrf	16	<u>962</u>	<u>186</u>	958	187	963	186	16	<u>962</u>	<u>186</u>	958	187	963	186
482.sphinx3	16	1778	175	1774	176	<u>1775</u>	<u>176</u>	16	1699	184	1703	183	<u>1700</u>	<u>183</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

This result was measured on the PRIMERGY TX300 S5. The PRIMERGY TX300 S5 and the PRIMERGY RX300 S5 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 168

PRIMERGY RX300 S5, Intel Xeon E5540, 2.53 GHz

SPECfp_rate_base2006 = 162

CPU2006 license: 19

Test date: Feb-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 168

PRIMERGY RX300 S5, Intel Xeon E5540, 2.53 GHz

SPECfp_rate_base2006 = 162

CPU2006 license: 19

Test date: Feb-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 168

PRIMERGY RX300 S5, Intel Xeon E5540, 2.53 GHz

SPECfp_rate_base2006 = 162

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu Siemens Computers

Test date: Feb-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: basepeak = yes

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 168

PRIMERGY RX300 S5, Intel Xeon E5540, 2.53 GHz

SPECfp_rate_base2006 = 162

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu Siemens Computers

Test date: Feb-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:31:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 March 2009.