



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 102

IBM Power 520 (4.7 GHz, 4 core, SLES)

SPECfp_rate_base2006 = 83.7

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2009

Hardware Availability: May-2009

Software Availability: Mar-2009

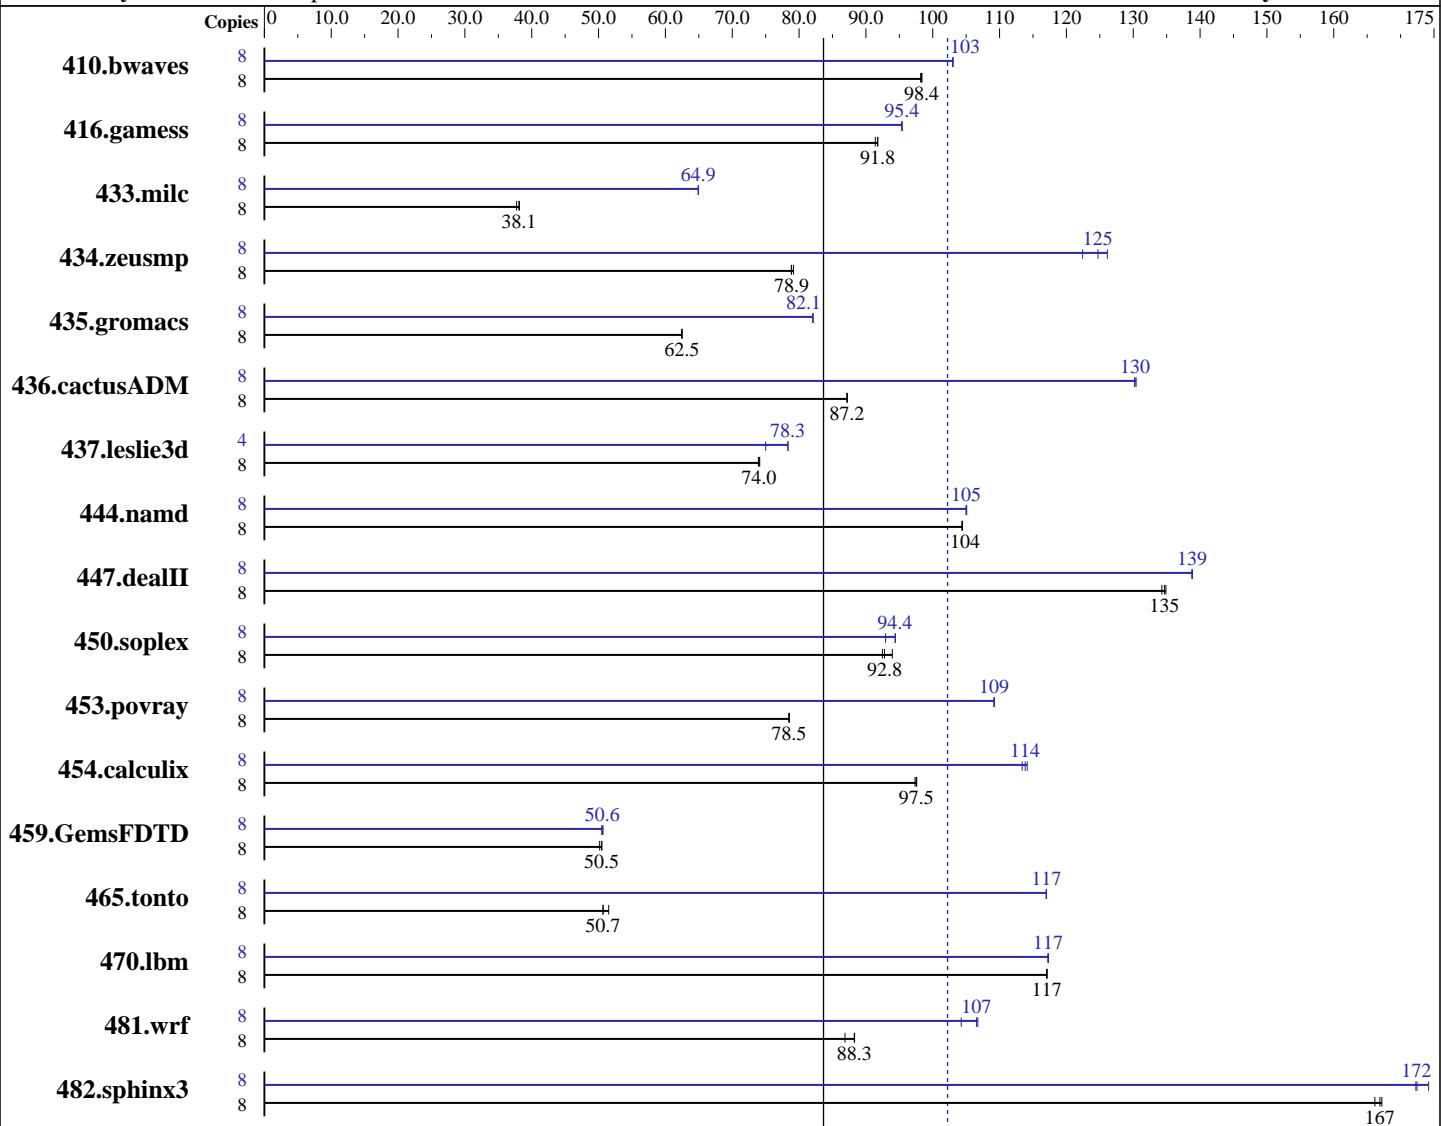

Hardware

CPU Name: POWER6+
CPU Characteristics:
CPU MHz: 4700
FPU: Integrated
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 cores
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11
Compiler: IBM XL C/C++ for Linux, V10.1
Updated with the Mar2009 PTF.
IBM XL Fortran for Linux, V12
Updated with the Mar2009 PTF.
Auto Parallel: No
File System: ext3
System State: Run Level 3 (Multi-User)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 102

IBM Power 520 (4.7 GHz, 4 core, SLES)

SPECfp_rate_base2006 = 83.7

CPU2006 license: 11

Test date: Mar-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

L3 Cache: 32 MB I+D off chip per chip
 Other Cache: None
 Memory: 32 GB (8x4 GB) DDR2 667 MHz
 Disk Subsystem: 2x146 GB SAS 15K RPM
 Other Hardware: None

Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software:
 -Post-Link Optimization for Linux on
 POWER, Version 5.4.0-21
 -MicroQuill SmartHeap 8.1

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1107	98.2	1105	98.4	1105	98.4	8	1055	103	1056	103	1055	103
416.gamess	8	1707	91.8	1707	91.8	1714	91.4	8	1642	95.4	1642	95.4	1642	95.4
433.milc	8	1925	38.2	1946	37.7	1928	38.1	8	1132	64.9	1131	64.9	1131	64.9
434.zeusmp	8	923	78.8	920	79.2	923	78.9	8	577	126	584	125	595	122
435.gromacs	8	914	62.5	914	62.5	914	62.5	8	696	82.1	696	82.1	696	82.0
436.cactusADM	8	1097	87.2	1096	87.2	1097	87.2	8	733	130	734	130	734	130
437.leslie3d	8	1017	73.9	1016	74.0	1015	74.1	4	501	75.0	480	78.3	480	78.4
444.namd	8	614	104	615	104	614	104	8	611	105	611	105	611	105
447.dealII	8	682	134	680	135	678	135	8	659	139	659	139	659	139
450.soplex	8	710	94.0	722	92.5	719	92.8	8	707	94.4	718	92.9	707	94.4
453.povray	8	542	78.5	542	78.5	542	78.5	8	390	109	390	109	390	109
454.calculix	8	678	97.4	677	97.5	676	97.6	8	580	114	578	114	582	113
459.GemsFDTD	8	1692	50.2	1682	50.5	1681	50.5	8	1675	50.7	1682	50.5	1679	50.6
465.tonto	8	1553	50.7	1554	50.7	1528	51.5	8	673	117	673	117	673	117
470.lbm	8	939	117	939	117	939	117	8	937	117	937	117	937	117
481.wrf	8	1013	88.3	1012	88.3	1029	86.9	8	839	107	837	107	857	104
482.sphinx3	8	933	167	938	166	934	167	8	904	172	905	172	895	174

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Benchmarks bound to a processor using numactl on the submit command.

General Notes

kernel release 2.6.27.19-5-ppc64.

See flags file for details on following settings.

ulimit -s (stack) set to 1048576.

System configured with libhugetlbfs library for application access to large pages

Large pages reserved as follows by root user:

```
echo 530 > /proc/sys/vm/nr_hugepages
```

Environment variables set before executing benchmarks.

```
export HUGETLB_VERBOSE=0
```

```
export HUGETLB_MORECORE=yes
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 102

IBM Power 520 (4.7 GHz, 4 core, SLES)

SPECfp_rate_base2006 = 83.7

CPU2006 license: 11

Test date: Mar-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

General Notes (Continued)

```
export XLF RTEOPTS=intrinthds=1
IBM Post-Link optimization tool was used for these benchmarks, with options:
433.milc : "-imullX" (instrumentation phase), "-O4 -omullX" (optimization phase)
435.gromacs : same as 433.milc
436.cactusADM : same as 433.milc
482.sphinx3 : same as 433.milc
453.povray : "-imullX" (instrumentation phase), "-O4 -omullX -see 1 -ihf -1" (optimization phase)
465.tonto : "-O4" (optimization phase)
```

Base Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlc

Fortran benchmarks:

xlf95

Benchmarks using both Fortran and C:

xlc -qlanglvl=extc99 xlf95

Base Portability Flags

```
410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

-O5 -qarch=pwr6 -qtune=pwr6 -qnoenablevmx -lhugetlbfs

C++ benchmarks:

-O5 -qarch=pwr6 -qtune=pwr6 -qrtti -qnoenablevmx -qstaticlink
-Wl,--whole-archive /usr/lib/libhugetlbfs.a -Wl,--no-whole-archive

Fortran benchmarks:

-O5 -qarch=pwr6 -qtune=pwr6 -qsmalstack=dynlenonheap -qalias=nostd
-qnoenablevmx -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 102

IBM Power 520 (4.7 GHz, 4 core, SLES)

SPECfp_rate_base2006 = 83.7

CPU2006 license: 11

Test date: Mar-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-O5 -qarch=pwr6 -qtune=pwr6 -qnoenablevmx -qsmallstack=dynlenonheap  
-qalias=nostd -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qipa=threads
```

C++ benchmarks:

```
-qipa=noobject -qipa=threads
```

Fortran benchmarks:

```
-qipa=noobject -qipa=threads
```

Benchmarks using both Fortran and C:

```
-qipa=noobject -qipa=threads
```

Peak Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
xlc
```

Fortran benchmarks:

```
xlf95
```

Benchmarks using both Fortran and C:

```
xlc -qlanglvl=extc99 xlf95
```

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 102

IBM Power 520 (4.7 GHz, 4 core, SLES)

SPECfp_rate_base2006 = 83.7

CPU2006 license: 11

Test date: Mar-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Peak Portability Flags (Continued)

481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -Wl,-q -O5 -qarch=pwr6 -qtune=pwr6 -qnoenablevmx
-lhugetlbfs

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6 -qtune=pwr6
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
-q64

482.sphinx3: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr6
-qtune=pwr6 -lhugetlbfs

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr6 -qtune=pwr6

447.dealII: -O5 -qarch=pwr6 -qtune=pwr6 -qrtti -qnoenablevmx
-qstaticlink -Wl,--whole-archive /usr/lib/libsmartheap.a
-Wl,--no-whole-archive

450.soplex: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr6 -qtune=pwr6
-qstrict -lhugetlbfs

453.povray: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr6
-qtune=pwr6 -lsmartheap

Fortran benchmarks:

410.bwaves: -O5 -qarch=pwr6 -qtune=pwr6 -qsmallstack=dynlenonheap
-lhugetlbfs

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr6 -qtune=pwr6
-qalias=nostd -qnoenablevmx

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6 -qtune=pwr6
-qxlf90=nosignedzero -B/usr/share/libhugetlbfs/ -tl
-Wl,--hugetlbfs-link=BDT

437.leslie3d: -O5 -qarch=pwr6 -qtune=pwr6 -qsmallstack=dynlenonheap
-qnoenablevmx -B/usr/share/libhugetlbfs/ -tl
-Wl,--hugetlbfs-link=BDT

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 102

IBM Power 520 (4.7 GHz, 4 core, SLES)

SPECfp_rate_base2006 = 83.7

CPU2006 license: 11

Test date: Mar-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Peak Optimization Flags (Continued)

459.GemsFDTD: -O5 -qarch=pwr6 -qtune=pwr6 -B/usr/share/libhugetlbf / -t1
-Wl,--hugetlbf-link=BDT -q64

465.tonto: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr6
-qtune=pwr6 -q64 -lsmartheap64 -lxlf90_r

Benchmarks using both Fortran and C:

435.gromacs: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr6
-qtune=pwr6 -lhugetlbf

436.cactusADM: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O2 -qarch=pwr6
-qtune=pwr6 -qnostrict -lhugetlbf

454.calculix: -O4 -qarch=pwr6 -qtune=pwr6 -B/usr/share/libhugetlbf / -t1
-Wl,--hugetlbf-link=BDT

481.wrf: -O5 -qarch=pwr6 -qtune=pwr6 -qnoenablevmx -q64
-lhugetlbf

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 102

IBM Power 520 (4.7 GHz, 4 core, SLES)

SPECfp_rate_base2006 = 83.7

CPU2006 license: 11

Test date: Mar-2009

Test sponsor: IBM Corporation

Hardware Availability: May-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:55:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 May 2009.