



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

SPECfp®2006 = 45.5

SPECfp_base2006 = 42.8

CPU2006 license: 9016


Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Jul-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

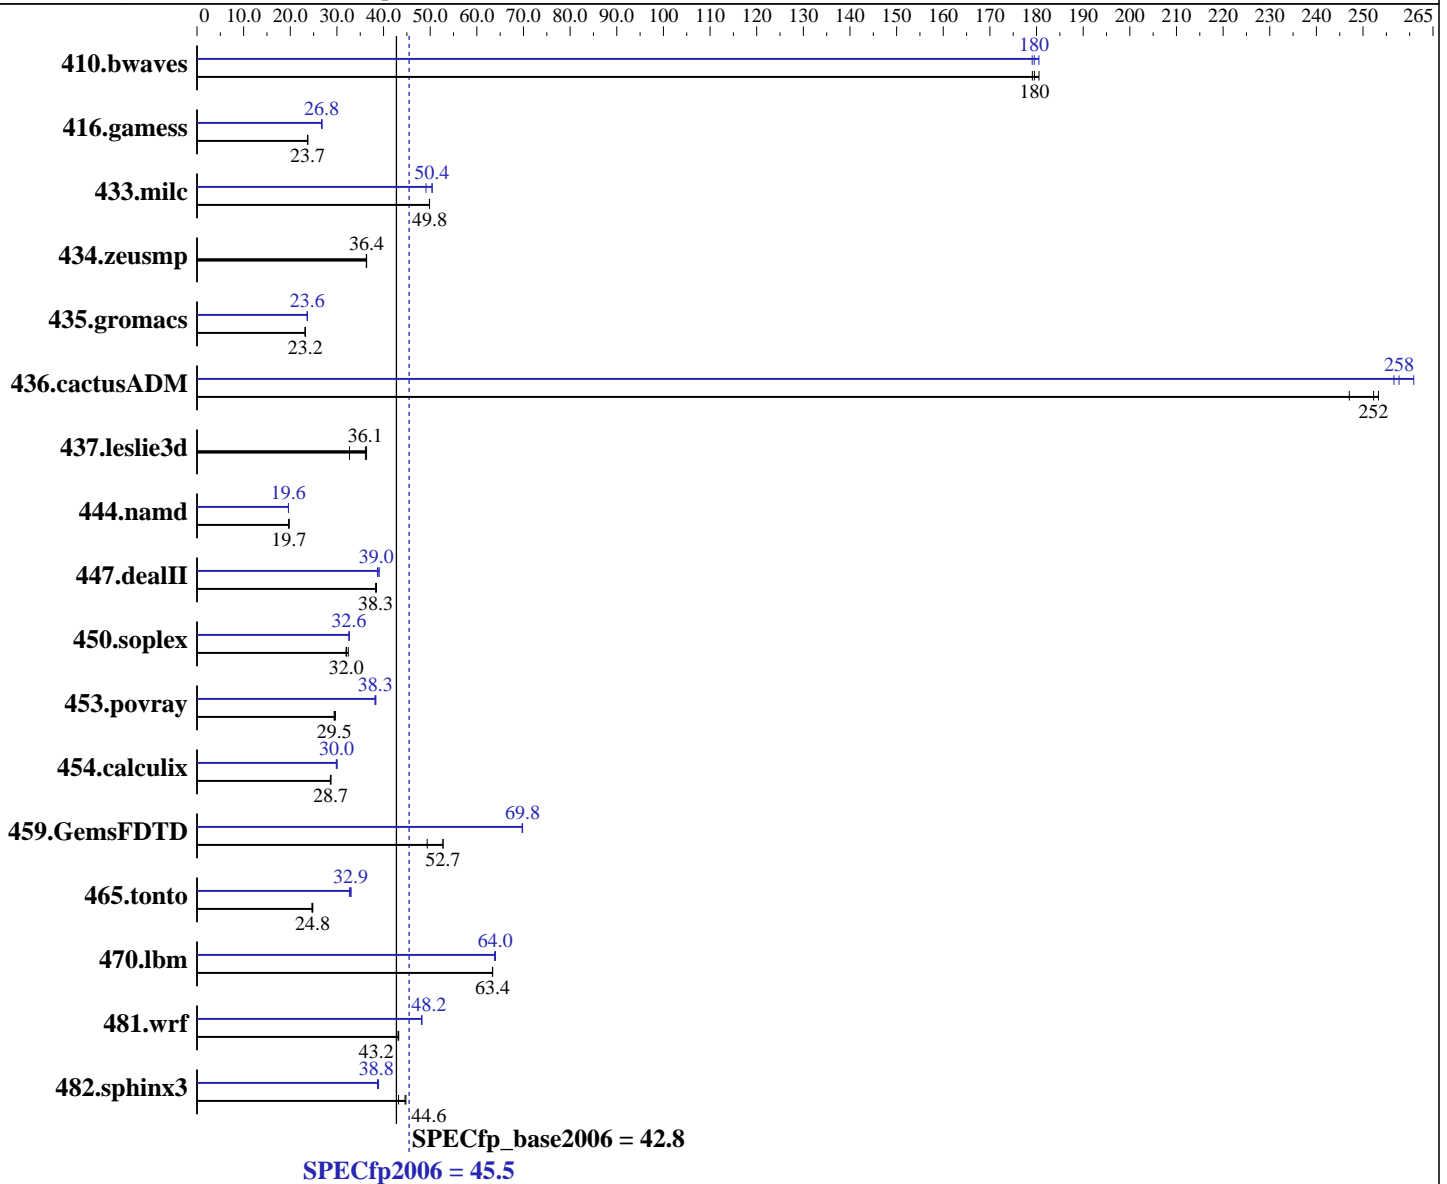

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

SPECfp2006 = **45.5**

SPECfp_base2006 = **42.8**

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Jul-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-10600R, CL=9)
 Disk Subsystem: HITACHI HDP725050GLA380 1 x 500 GB SATAII, 7200 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	75.9	179	75.7	180	75.3	181	75.9	179	75.3	181	75.7	180
416.gamess	824	23.8	827	23.7	825	23.7	731	26.8	732	26.7	732	26.8
433.milc	184	49.9	184	49.8	184	49.8	187	49.1	182	50.4	182	50.4
434.zeusmp	250	36.4	250	36.4	251	36.3	250	36.4	250	36.4	251	36.3
435.gromacs	308	23.2	308	23.2	307	23.3	302	23.7	302	23.6	302	23.6
436.cactusADM	47.4	252	47.2	253	48.4	247	45.8	261	46.4	258	46.6	257
437.leslie3d	288	32.7	259	36.4	260	36.1	288	32.7	259	36.4	260	36.1
444.namd	407	19.7	407	19.7	407	19.7	409	19.6	409	19.6	409	19.6
447.dealII	299	38.3	298	38.3	297	38.5	293	39.0	296	38.7	293	39.0
450.soplex	257	32.4	260	32.0	261	32.0	256	32.6	256	32.6	255	32.6
453.povray	180	29.5	179	29.7	181	29.4	139	38.4	139	38.3	139	38.2
454.calculix	289	28.6	287	28.7	288	28.7	275	30.0	276	29.9	275	30.0
459.GemsFDTD	201	52.8	215	49.4	201	52.7	152	69.8	152	69.7	152	69.8
465.tonto	397	24.8	397	24.8	399	24.6	298	33.0	299	32.9	301	32.7
470.lbm	217	63.4	217	63.3	217	63.4	215	64.0	215	63.8	215	64.0
481.wrf	259	43.2	258	43.3	259	43.1	232	48.2	232	48.1	232	48.2
482.sphinx3	435	44.8	437	44.6	451	43.2	502	38.8	503	38.7	501	38.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
```

Component Notes

Tested system case compliance with Intel EEB 3.61 spec
 SSI Server Power Supply 650W or higher
 System was configured with ASPEED AST2050 VGA (on board VGA)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 45.5

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

SPECfp_base2006 = 42.8

CPU2006 license: 9016

Test date: Jul-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 45.5

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

SPECfp_base2006 = 42.8

CPU2006 license: 9016

Test date: Jul-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32`

447.dealIII: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 45.5

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

SPECfp_base2006 = 42.8

CPU2006 license: 9016

Test date: Jul-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

SPECfp2006 = 45.5

SPECfp_base2006 = 42.8

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Jul-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 11:41:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 August 2010.