



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

### SPECint®\_rate2006 = 6130

### IBM Power 795 (4.25 GHz, 128 core, SLES)

### SPECint\_rate\_base2006 = 5350

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2010

Hardware Availability: Sep-2010

Software Availability: Aug-2010

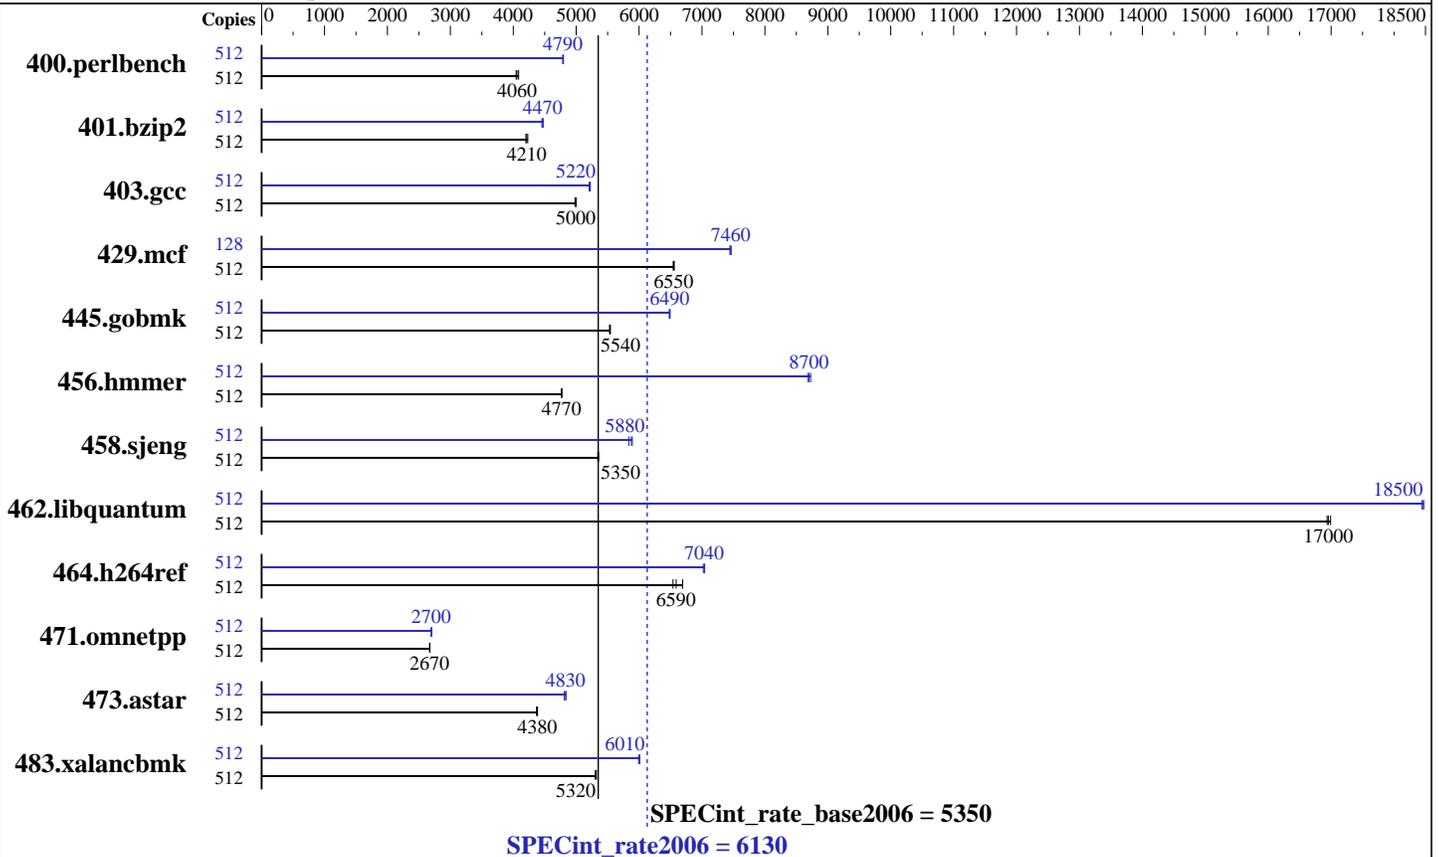

#### Hardware

CPU Name: POWER7  
 CPU Characteristics: TurboCore mode  
 CPU MHz: 4256  
 FPU: Integrated  
 CPU(s) enabled: 128 cores, 32 chips, 4 cores/chip, 4 threads/core  
 CPU(s) orderable: 48 - 128 cores  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per core  
 Other Cache: 16 MB I+D on chip per chip  
 Memory: 2 TB (256x8 GB) DDR3 1066 MHz  
 Disk Subsystem: 17x146.8 GB Raid0 SAS SFF 15K RPM  
 Other Hardware: None

#### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (ppc64), Kernel 2.6.32.12-0.7-ppc64  
 Compiler: IBM XL C/C++ for Linux, V11.1  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-3  
 -MicroQuill SmartHeap 9



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 6130

IBM Power 795 (4.25 GHz, 128 core, SLES)

SPECint\_rate\_base2006 = 5350

CPU2006 license: 11

Test date: Sep-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	512	<u>1232</u>	<u>4060</u>	1237	4050	1224	4090	512	<u>1044</u>	<u>4790</u>	1043	4800	1045	4790
401.bzip2	512	<u>1172</u>	<u>4210</u>	1176	4200	1168	4230	512	<u>1106</u>	<u>4470</u>	1109	4460	1104	4480
403.gcc	512	825	5000	<u>825</u>	<u>5000</u>	827	4980	512	789	5230	<u>790</u>	<u>5220</u>	792	5210
429.mcf	512	712	6560	714	6540	<u>713</u>	<u>6550</u>	128	157	7440	<u>157</u>	<u>7460</u>	156	7460
445.gobmk	512	969	5540	<u>970</u>	<u>5540</u>	971	5530	512	829	6480	827	6490	<u>828</u>	<u>6490</u>
456.hmmer	512	1002	4770	1001	4770	<u>1002</u>	<u>4770</u>	512	550	8680	547	8730	<u>549</u>	<u>8700</u>
458.sjeng	512	<u>1157</u>	<u>5350</u>	1160	5340	1157	5350	512	<u>1054</u>	<u>5880</u>	1051	5890	1061	5840
462.libquantum	512	<u>626</u>	<u>17000</u>	626	16900	624	17000	512	<u>574</u>	<u>18500</u>	574	18500	575	18400
464.h264ref	512	<u>1720</u>	<u>6590</u>	1693	6690	1733	6540	512	<u>1610</u>	<u>7040</u>	1614	7020	1609	7040
471.omnetpp	512	1198	2670	<u>1198</u>	<u>2670</u>	1196	2680	512	<u>1187</u>	<u>2700</u>	1184	2700	1187	2700
473.astar	512	<u>820</u>	<u>4380</u>	822	4370	820	4390	512	<u>744</u>	<u>4830</u>	743	4840	747	4810
483.xalanbmk	512	<u>664</u>	<u>5320</u>	664	5320	666	5300	512	588	6010	590	5990	<u>588</u>	<u>6010</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Tuning Notes

```

fdpr binary optimization tool used for:
400.perlbench
  with options -O4 -omullX for optimization phase,
  and -imullX for instrumentation phase
401.bzip2
  with options -O4 -vrox
403.gcc
  with options -O4 -nodp -rtb
429.mcf 445.gobmk 458.sjeng 473.astar
  with options -O3
456.hmmer
  with options -O4 -nodp -m power7
462.libquantum
  with options -O4 -vrox -nodp
464.h264ref
  with options -O4 -vrox -nodp -rtb
471.omnetpp
  with options -O3 -lu -1 -nodp -sdp 9
483.xalanbmk
  with options -O3 -m power7

```

## Submit Notes

The config file option 'submit' was used.  
Benchmarks bound to a processor using numactl on the submit command.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 6130

IBM Power 795 (4.25 GHz, 128 core, SLES)

SPECint\_rate\_base2006 = 5350

CPU2006 license: 11

Test date: Sep-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Operating System Notes

```
ulimit -s (stack) set to 1048576.  
Large pages reserved as follows by root user:  
echo 28160 > /proc/sys/vm/nr_hugepages  
The following environment variables were set before the runspec command:  
export HUGETLB_VERBOSE=0  
export HUGETLB_MORECORE=yes  
export XLFRTEOPTS=intrinthds=1
```

## Base Compiler Invocation

C benchmarks:  
xlc -qlanglvl=extc99

C++ benchmarks:  
xlC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_PPC  
462.libquantum: -DSPEC_CPU_LINUX  
464.h264ref: -qchars=signed  
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-O5 -qarch=pwr7 -qtune=pwr7 -qalias=noansi -qalloca -lhugetlbfs

C++ benchmarks:  
-O5 -qarch=pwr7 -qtune=pwr7 -qrtti -lsmartheap

## Base Other Flags

C benchmarks:  
-qipa=noobject -qipa=threads

C++ benchmarks:  
-qipa=noobject -qipa=threads



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 6130

IBM Power 795 (4.25 GHz, 128 core, SLES)

SPECint\_rate\_base2006 = 5350

CPU2006 license: 11

Test date: Sep-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Peak Compiler Invocation

C benchmarks:

xlC -qlanglvl=extc99

C++ benchmarks:

xlC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_PPC  
462.libquantum: -DSPEC\_CPU\_LINUX  
464.h264ref: -qchars=signed  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qalias=noansi -qipa=level=2 -lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qalloca -lhugetlbfs

429.mcf: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

456.hmmer: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -qsimd  
-qassert=refalign -qipa=inline=threshold=2888  
-qipa=inline=limit=11880 -lhugetlbfs

458.sjeng: Same as 429.mcf

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -q64 -lhugetlbfs

464.h264ref: Same as 429.mcf

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 6130

IBM Power 795 (4.25 GHz, 128 core, SLES)

SPECint\_rate\_base2006 = 5350

CPU2006 license: 11

Test date: Sep-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Peak Optimization Flags (Continued)

471.omnetpp: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qipa=inline=threshold=2468  
-qipa=inline=limit=11060 -qipa=partition=large -lhugetlbfs  
-lsmartheap

483.xalancbmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr5  
-qtune=pwr5 -qipa=inline=threshold=2468  
-qipa=inline=limit=11060 -qipa=partition=large -lsmartheap

## Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100901.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100901.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:01:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 November 2010.