



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

### SPECint<sup>®</sup>\_rate2006 = 380

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

### SPECint\_rate\_base2006 = 354

CPU2006 license: 9016


Test date: Oct-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

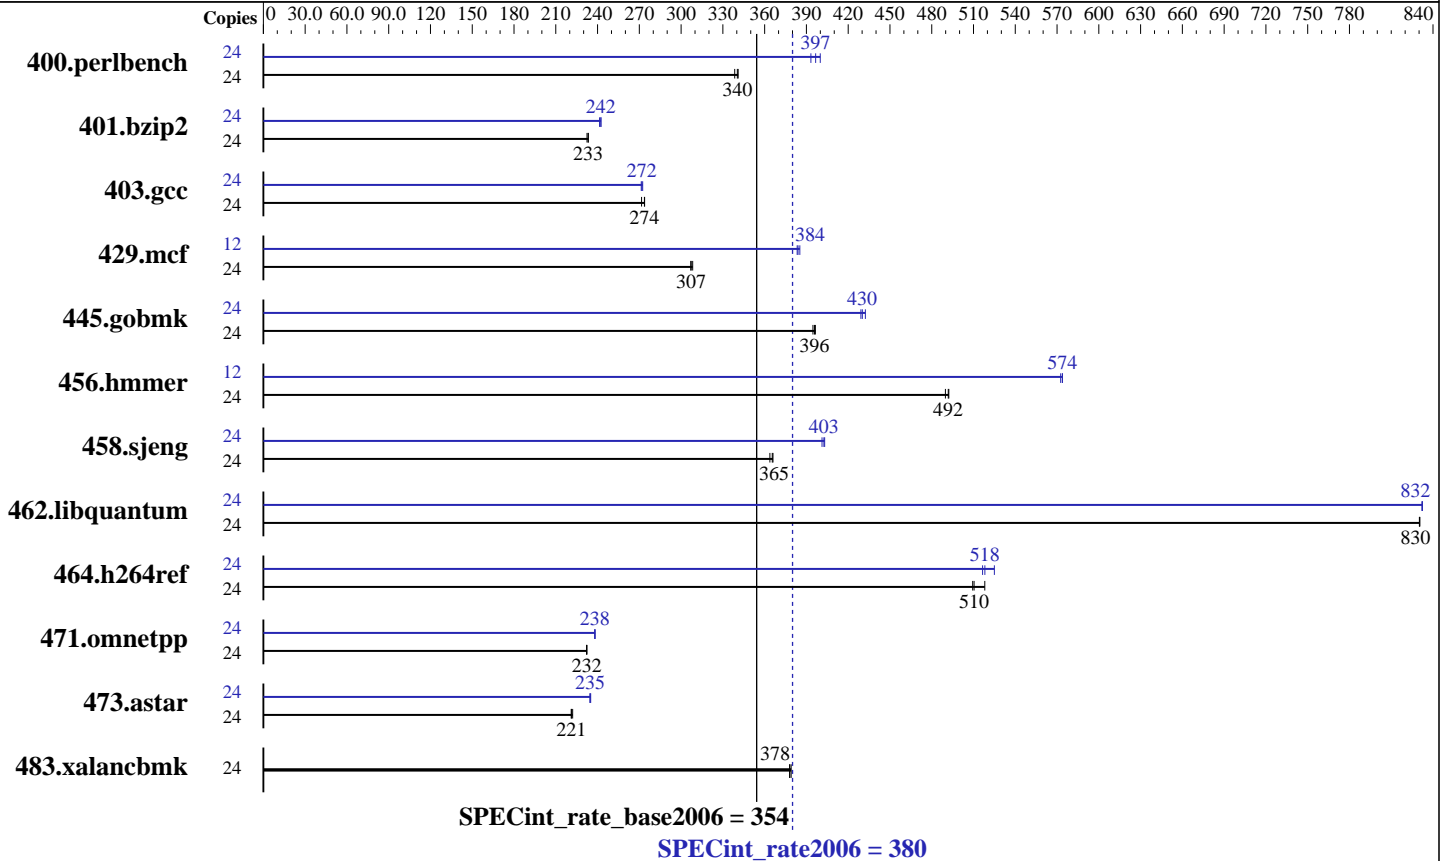

### Hardware

CPU Name: Intel Xeon X5680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: HITACHI HDP725050GLA380 1 x 500 GB SATAII, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECint\_rate2006 = 380

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

SPECint\_rate\_base2006 = 354

CPU2006 license: 9016

Test date: Oct-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Oct-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>689</b>	<b>340</b>	693	338	688	341	24	596	393	586	400	<b>591</b>	<b>397</b>
401.bzip2	24	996	232	<b>993</b>	<b>233</b>	993	233	24	959	241	955	242	<b>956</b>	<b>242</b>
403.gcc	24	706	274	711	272	<b>706</b>	<b>274</b>	24	709	272	<b>711</b>	<b>272</b>	712	271
429.mcf	24	713	307	710	308	<b>712</b>	<b>307</b>	12	<b>285</b>	<b>384</b>	285	383	284	385
445.gobmk	24	638	395	635	396	<b>636</b>	<b>396</b>	24	582	432	587	429	<b>585</b>	<b>430</b>
456.hammer	24	457	490	455	492	<b>455</b>	<b>492</b>	12	195	574	196	573	<b>195</b>	<b>574</b>
458.sjeng	24	798	364	793	366	<b>795</b>	<b>365</b>	24	724	401	720	403	<b>721</b>	<b>403</b>
462.libquantum	24	599	831	599	830	<b>599</b>	<b>830</b>	24	597	832	<b>597</b>	<b>832</b>	598	832
464.h264ref	24	1025	518	<b>1041</b>	<b>510</b>	1043	509	24	1012	525	<b>1025</b>	<b>518</b>	1028	517
471.omnetpp	24	646	232	<b>646</b>	<b>232</b>	646	232	24	630	238	630	238	<b>630</b>	<b>238</b>
473.astar	24	762	221	<b>762</b>	<b>221</b>	758	222	24	717	235	<b>718</b>	<b>235</b>	718	235
483.xalancbmk	24	437	379	438	378	<b>438</b>	<b>378</b>	24	437	379	438	378	<b>438</b>	<b>378</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Component Notes

Tested system case compliance with Intel EEB 3.61 spec  
SSI Server Power Supply 650W or higher  
System was configured with ASPEED AST2050 VGA (on board VGA)

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 380**

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

**SPECint\_rate\_base2006 = 354**

**CPU2006 license:** 9016

**Test date:** Oct-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Oct-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic11.1-32bit -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 380**

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

**SPECint\_rate\_base2006 = 354**

**CPU2006 license:** 9016

**Test date:** Oct-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Oct-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Peak Portability Flags (Continued)

456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 380**

ASUS RS704D-E6 (Z8PH-D12 SE/QDR) server system  
(Intel Xeon X5680)

**SPECint\_rate\_base2006 = 354**

**CPU2006 license:** 9016

**Test date:** Oct-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Oct-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

473.astar (continued):

`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:00:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 November 2010.