



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint<sup>®</sup>\_rate2006 = 160

PRIMERGY TX140 S1, Intel Xeon E3-1240, 3.30 GHz

SPECint\_rate\_base2006 = 154

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

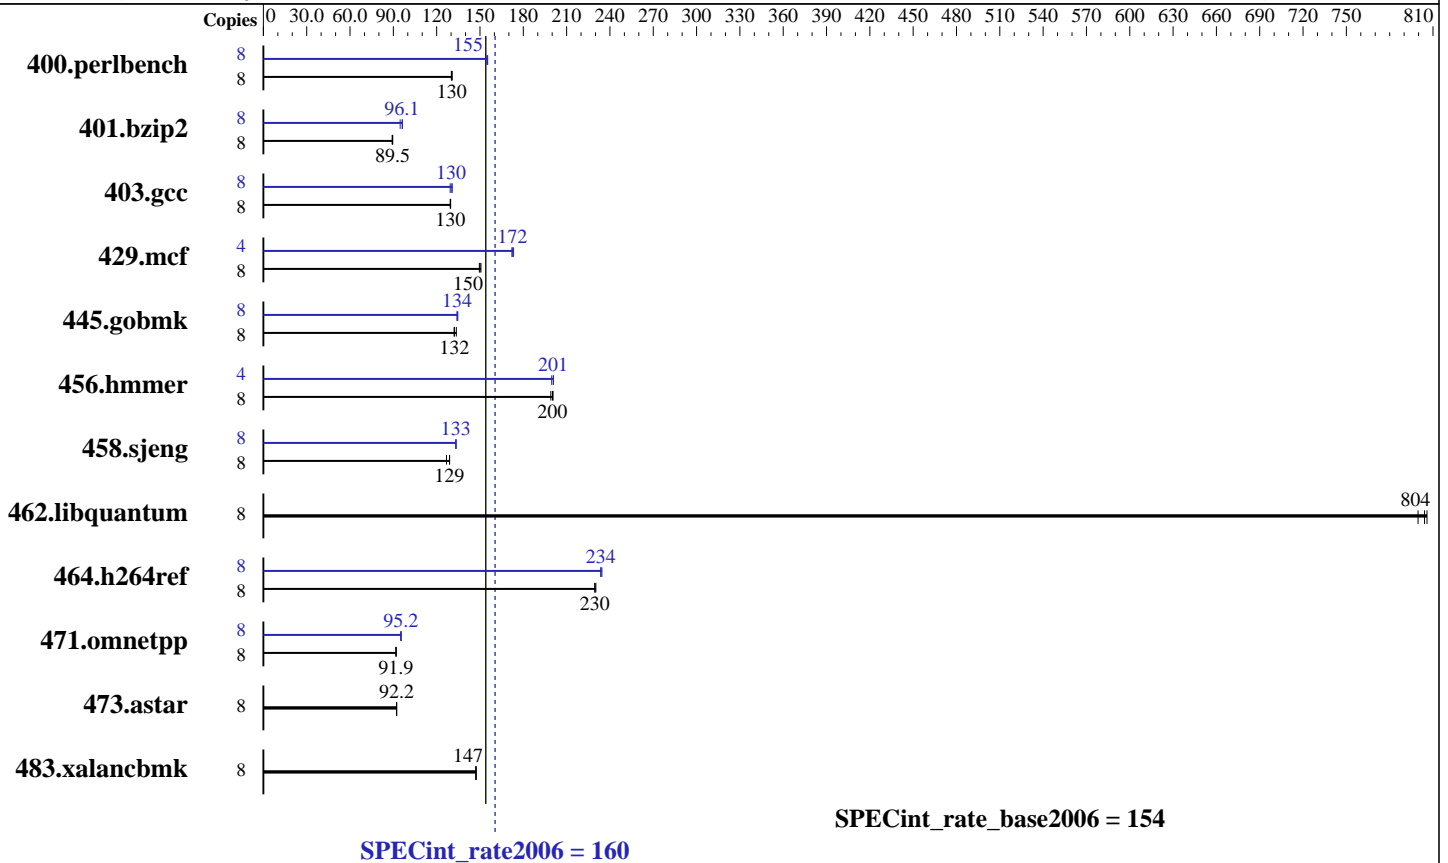

### Hardware

CPU Name: Intel Xeon E3-1240  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)  
 Disk Subsystem: 1 x SATA, 300 GB, 7200 RPM  
 Other Hardware: --

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32, Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 160

PRIMERGY TX140 S1, Intel Xeon E3-1240, 3.30 GHz

SPECint\_rate\_base2006 = 154

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: May-2011  
Hardware Availability: Jun-2011  
Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	598	131	<u>599</u>	<u>130</u>	601	130	8	503	155	<u>504</u>	<u>155</u>	505	155
401.bzip2	8	866	89.2	<u>863</u>	<u>89.5</u>	862	89.6	8	<u>803</u>	<u>96.1</u>	815	94.7	802	96.3
403.gcc	8	497	130	498	129	<u>497</u>	<u>130</u>	8	498	129	492	131	<u>495</u>	<u>130</u>
429.mcf	8	484	151	488	150	<u>486</u>	<u>150</u>	4	212	172	211	173	<u>212</u>	<u>172</u>
445.gobmk	8	635	132	<u>634</u>	<u>132</u>	628	134	8	623	135	626	134	<u>625</u>	<u>134</u>
456.hammer	8	372	201	<u>373</u>	<u>200</u>	375	199	4	186	201	<u>186</u>	<u>201</u>	187	200
458.sjeng	8	<u>751</u>	<u>129</u>	751	129	763	127	8	725	133	726	133	<u>726</u>	<u>133</u>
462.libquantum	8	206	806	<u>206</u>	<u>804</u>	207	800	8	206	806	<u>206</u>	<u>804</u>	207	800
464.h264ref	8	769	230	<u>771</u>	<u>230</u>	771	230	8	<u>757</u>	<u>234</u>	755	234	758	234
471.omnetpp	8	545	91.8	<u>544</u>	<u>91.9</u>	544	91.9	8	<u>525</u>	<u>95.2</u>	524	95.4	525	95.2
473.astar	8	<u>609</u>	<u>92.2</u>	609	92.2	608	92.4	8	<u>609</u>	<u>92.2</u>	609	92.2	608	92.4
483.xalancbmk	8	375	147	375	147	<u>375</u>	<u>147</u>	8	375	147	375	147	<u>375</u>	<u>147</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
Large pages were not enabled for this run

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5  
This result was measured on the PRIMERGY TX120 S3. The PRIMERGY TX120 S3  
and the PRIMERGY TX140 S1 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 160

PRIMERGY TX140 S1, Intel Xeon E3-1240, 3.30 GHz

SPECint\_rate\_base2006 = 154

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: May-2011  
Hardware Availability: Jun-2011  
Software Availability: Jan-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 160

PRIMERGY TX140 S1, Intel Xeon E3-1240, 3.30 GHz

SPECint\_rate\_base2006 = 154

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: May-2011  
Hardware Availability: Jun-2011  
Software Availability: Jan-2011

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzp2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xAVX -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-auto-ilp32

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmcr: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 160**

PRIMERGY TX140 S1, Intel Xeon E3-1240, 3.30 GHz

**SPECint\_rate\_base2006 = 154**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** May-2011

**Hardware Availability:** Jun-2011

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Intel-Linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Intel-Linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 20:27:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 May 2011.