



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec


SPECint<sup>®</sup>\_rate2006 = 251

Servidor Itaotec MX223 (Intel Xeon E5640)

SPECint\_rate\_base2006 = 237

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: May-2011  
Hardware Availability: Apr-2010  
Software Availability: Jan-2011

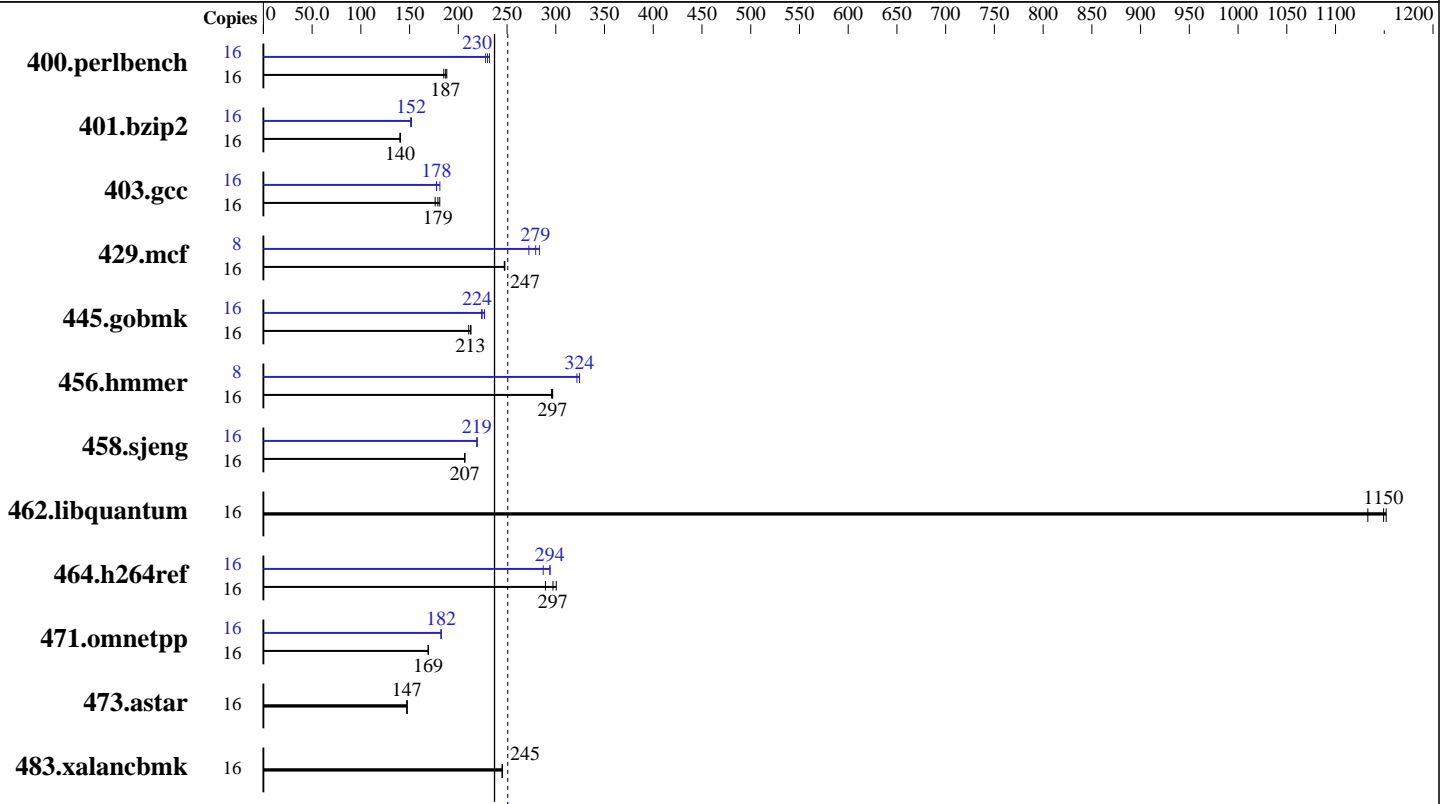

SPECint\_rate2006 = 251

SPECint\_rate\_base2006 = 237

### Hardware

CPU Name: Intel Xeon E5640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-8500R-7, ECC)  
 Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32, Version 12.0.2 Build 20110112  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 251

Servidor Itautec MX223 (Intel Xeon E5640)

SPECint\_rate\_base2006 = 237

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: May-2011  
Hardware Availability: Apr-2010  
Software Availability: Jan-2011

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	16	831	188	844	185	<b>836</b>	<b>187</b>	16	<b>680</b>	<b>230</b>	674	232	686	228		
401.bzip2	16	1101	140	1099	140	<b>1100</b>	<b>140</b>	16	<b>1018</b>	<b>152</b>	1017	152	1022	151		
403.gcc	16	731	176	<b>719</b>	<b>179</b>	712	181	16	711	181	725	178	<b>725</b>	<b>178</b>		
429.mcf	16	590	247	<b>590</b>	<b>247</b>	589	248	8	268	272	<b>261</b>	<b>279</b>	258	283		
445.gobmk	16	<b>789</b>	<b>213</b>	788	213	797	211	16	740	227	750	224	<b>748</b>	<b>224</b>		
456.hammer	16	505	296	503	297	<b>503</b>	<b>297</b>	8	230	324	232	322	<b>230</b>	<b>324</b>		
458.sjeng	16	936	207	938	206	<b>937</b>	<b>207</b>	16	<b>884</b>	<b>219</b>	883	219	884	219		
462.libquantum	16	288	1150	<b>288</b>	<b>1150</b>	293	1130	16	288	1150	<b>288</b>	<b>1150</b>	293	1130		
464.h264ref	16	1178	300	<b>1192</b>	<b>297</b>	1224	289	16	<b>1205</b>	<b>294</b>	1204	294	1233	287		
471.omnetpp	16	591	169	<b>591</b>	<b>169</b>	591	169	16	549	182	<b>548</b>	<b>182</b>	548	182		
473.astar	16	<b>762</b>	<b>147</b>	762	147	763	147	16	<b>762</b>	<b>147</b>	762	147	763	147		
483.xalancbmk	16	<b>450</b>	<b>245</b>	450	245	451	245	16	<b>450</b>	<b>245</b>	450	245	451	245		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## General Notes

This result was measured on the Servidor Itautec MX223.  
The Servidor Itautec MX203 and the Servidor Itautec MX223  
are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 251

Servidor Itautec MX223 (Intel Xeon E5640)

SPECint\_rate\_base2006 = 237

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: May-2011  
Hardware Availability: Apr-2010  
Software Availability: Jan-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 251

Servidor Itautec MX223 (Intel Xeon E5640)

SPECint\_rate\_base2006 = 237

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: May-2011  
Hardware Availability: Apr-2010  
Software Availability: Jan-2011

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmarheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 251

Servidor Itautec MX223 (Intel Xeon E5640)

SPECint\_rate\_base2006 = 237

CPU2006 license: 9001

Test date: May-2011

Test sponsor: Itautec

Hardware Availability: Apr-2010

Tested by: Itautec

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:42:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 June 2011.