



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 283**

PowerEdge R810 (Intel Xeon E7-2830, 2.13 GHz)

**SPECfp\_rate\_base2006 = 272**

CPU2006 license: 55


Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

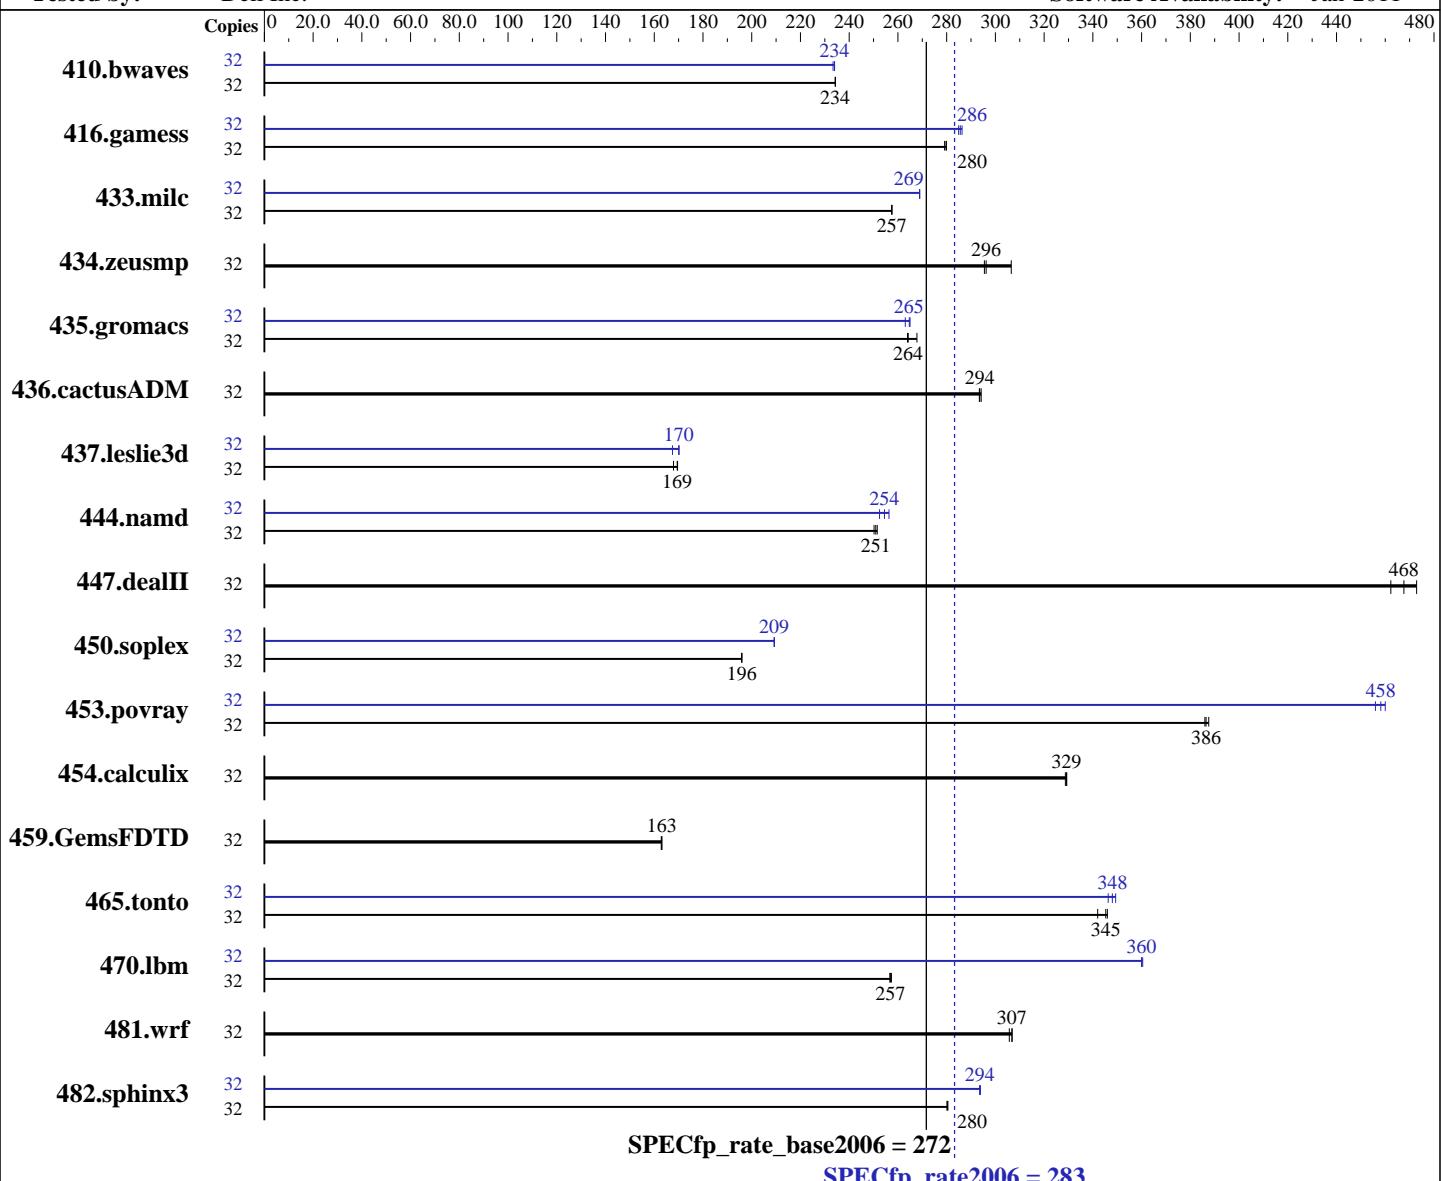

## Hardware

CPU Name: Intel Xeon E7-2830  
CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
CPU MHz: 2133  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 283**

PowerEdge R810 (Intel Xeon E7-2830, 2.13 GHz)

**SPECfp\_rate\_base2006 = 272**

CPU2006 license: 55

Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

L3 Cache: 24 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 4Rx8 PC3L-8500R-7, ECC)  
 Disk Subsystem: 2 x 300 GB 10000 RPM SAS, RAID0  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1856	234	1856	234	<b>1856</b>	<b>234</b>	32	1859	234	<b>1859</b>	<b>234</b>	1863	233
416.gamess	32	2244	279	2239	280	<b>2240</b>	<b>280</b>	32	2188	286	2199	285	<b>2194</b>	<b>286</b>
433.milc	32	1141	258	<b>1141</b>	<b>257</b>	1141	257	32	1092	269	<b>1092</b>	<b>269</b>	1092	269
434.zeusmp	32	950	307	<b>983</b>	<b>296</b>	985	295	32	950	307	<b>983</b>	<b>296</b>	985	295
435.gromacs	32	853	268	866	264	<b>865</b>	<b>264</b>	32	869	263	<b>863</b>	<b>265</b>	862	265
436.cactusADM	32	<b>1303</b>	<b>294</b>	1303	293	1300	294	32	<b>1303</b>	<b>294</b>	1303	293	1300	294
437.leslie3d	32	1791	168	<b>1776</b>	<b>169</b>	1774	170	32	1796	167	<b>1769</b>	<b>170</b>	1767	170
444.namd	32	1020	252	<b>1023</b>	<b>251</b>	1026	250	32	1001	256	<b>1008</b>	<b>254</b>	1017	252
447.dealII	32	774	473	<b>783</b>	<b>468</b>	792	462	32	774	473	<b>783</b>	<b>468</b>	792	462
450.soplex	32	1362	196	<b>1362</b>	<b>196</b>	1363	196	32	1275	209	<b>1275</b>	<b>209</b>	1275	209
453.povray	32	441	386	<b>441</b>	<b>386</b>	439	388	32	373	456	<b>372</b>	<b>458</b>	370	460
454.calculix	32	803	329	802	329	<b>802</b>	<b>329</b>	32	803	329	802	329	<b>802</b>	<b>329</b>
459.GemsFDTD	32	2085	163	<b>2082</b>	<b>163</b>	2082	163	32	2085	163	<b>2082</b>	<b>163</b>	2082	163
465.tonto	32	921	342	<b>912</b>	<b>345</b>	910	346	32	901	349	<b>905</b>	<b>348</b>	909	346
470.lbm	32	<b>1711</b>	<b>257</b>	1709	257	1713	257	32	1221	360	<b>1221</b>	<b>360</b>	1220	360
481.wrf	32	1165	307	<b>1165</b>	<b>307</b>	1169	306	32	1165	307	<b>1165</b>	<b>307</b>	1169	306
482.sphinx3	32	2226	280	2223	281	<b>2226</b>	<b>280</b>	32	2124	294	<b>2124</b>	<b>294</b>	2122	294

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 14400 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 283**

PowerEdge R810 (Intel Xeon E7-2830, 2.13 GHz)

**SPECfp\_rate\_base2006 = 272**

CPU2006 license: 55

Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 283**

PowerEdge R810 (Intel Xeon E7-2830, 2.13 GHz)

**SPECfp\_rate\_base2006 = 272**

CPU2006 license: 55

Test date: Apr-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
  433.milc: -DSPEC\_CPU\_LP64  
  434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
  437.leslie3d: -DSPEC\_CPU\_LP64  
    444.namd: -DSPEC\_CPU\_LP64  
    447.dealII: -DSPEC\_CPU\_LP64  
  453.povray: -DSPEC\_CPU\_LP64  
  454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
  465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
  481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R810 (Intel Xeon E7-2830, 2.13 GHz)

**SPECfp\_rate2006 = 283**

**SPECfp\_rate\_base2006 = 272**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Apr-2011

**Hardware Availability:** Apr-2011

**Software Availability:** Jan-2011

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
          -ansi-alias -opt-prefetch -static -auto-ilp32
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
             -B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias
             -B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -static
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep- -static
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
               -B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
             -inline-calloc -opt-malloc-options=3
             -B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 283**

PowerEdge R810 (Intel Xeon E7-2830, 2.13 GHz)

**SPECfp\_rate\_base2006 = 272**

**CPU2006 license:** 55

**Test date:** Apr-2011

**Test sponsor:** Dell Inc.

**Hardware Availability:** Apr-2011

**Tested by:** Dell Inc.

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

435.gromacs: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:36:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 June 2011.