



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp®_rate2006 = 65.9

HA8000-bd (Intel Xeon E3-1220L)

SPECfp_rate_base2006 = 63.6

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

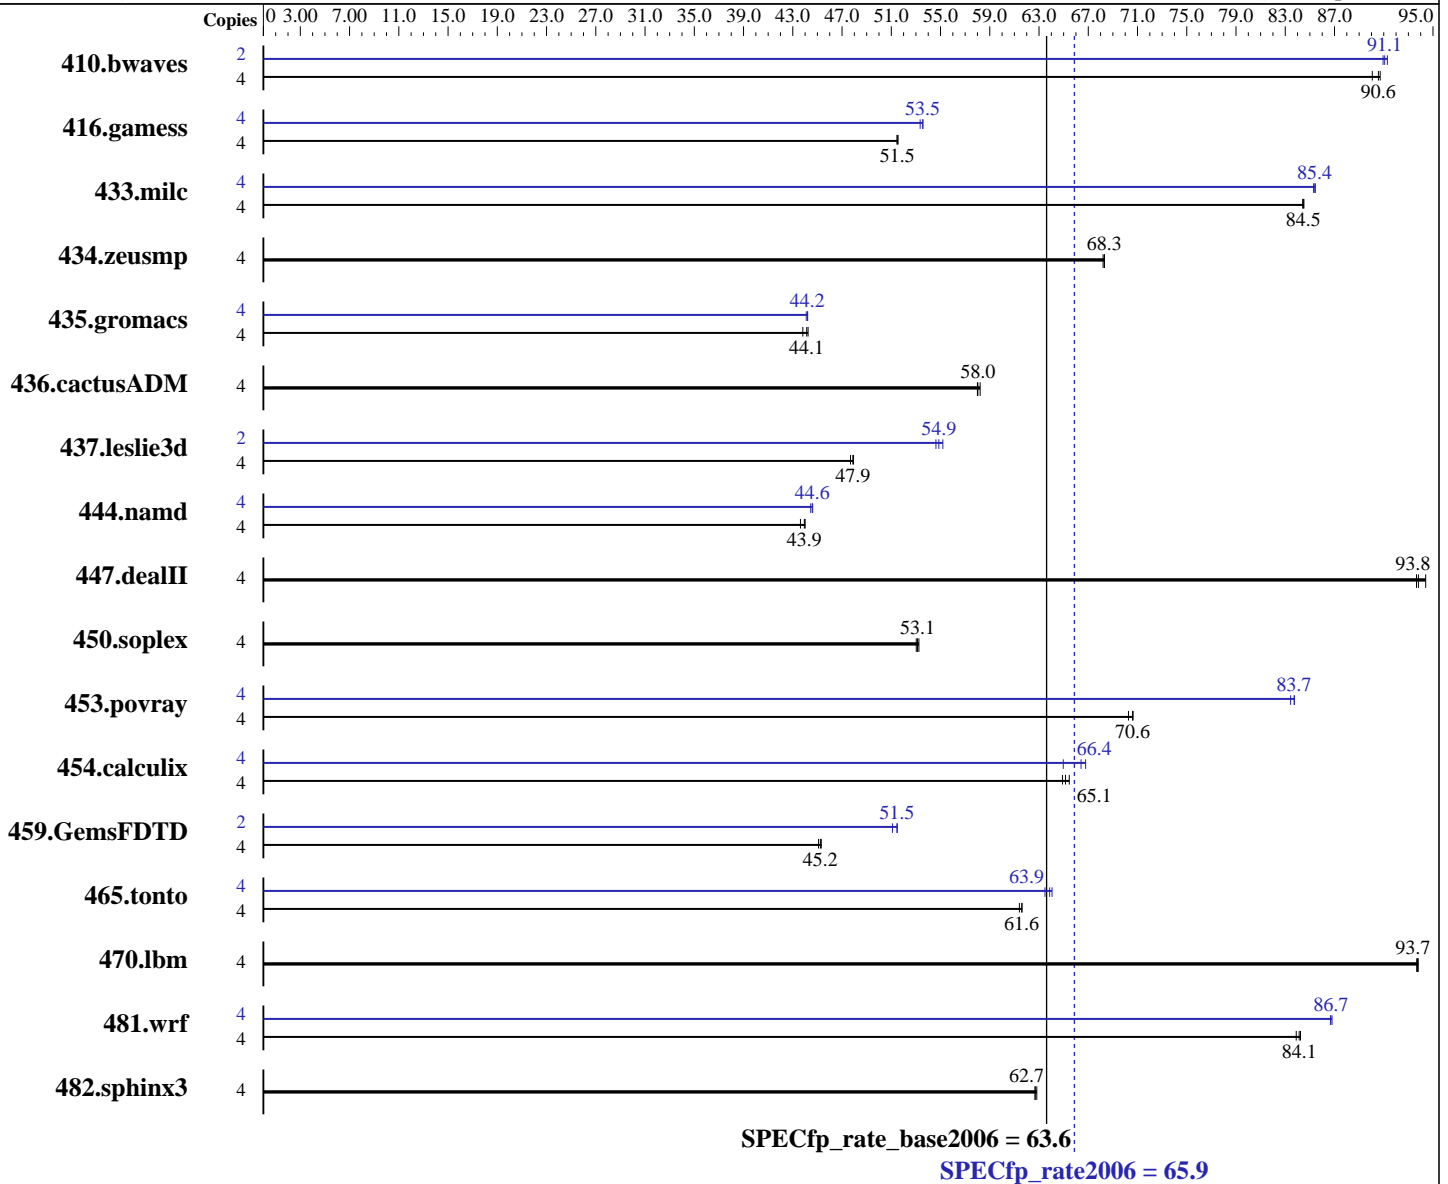

Hardware

CPU Name: Intel Xeon E3-1220L
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 12.1.0.225 of Intel Compiler XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = **65.9**

HA8000-bd (Intel Xeon E3-1220L)

SPECfp_rate_base2006 = 63.6

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB
 (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
 Disk Subsystem: 1 x 250 GB SATA2, 7200 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	599	90.7	600	90.6	604	90.1	2	299	90.9	298	91.3	298	91.1
416.gamess	4	1521	51.5	1519	51.6	1522	51.5	4	1463	53.5	1462	53.6	1468	53.3
433.milc	4	435	84.5	434	84.5	435	84.4	4	430	85.3	430	85.4	430	85.4
434.zeusmp	4	534	68.2	533	68.3	533	68.3	4	534	68.2	533	68.3	533	68.3
435.gromacs	4	646	44.2	652	43.8	647	44.1	4	648	44.1	646	44.2	646	44.2
436.cactusADM	4	824	58.0	824	58.0	821	58.2	4	824	58.0	824	58.0	821	58.2
437.leslie3d	4	788	47.7	785	47.9	784	47.9	2	341	55.2	344	54.6	343	54.9
444.namd	4	735	43.6	730	43.9	729	44.0	4	722	44.5	720	44.6	719	44.6
447.dealII	4	485	94.4	489	93.7	488	93.8	4	485	94.4	489	93.7	488	93.8
450.soplex	4	627	53.2	629	53.0	628	53.1	4	627	53.2	629	53.0	628	53.1
453.povray	4	301	70.6	303	70.3	301	70.6	4	254	83.7	254	83.7	255	83.4
454.calculix	4	504	65.5	507	65.1	508	64.9	4	497	66.4	494	66.8	508	65.0
459.GemsFDTD	4	941	45.1	937	45.3	938	45.2	2	412	51.5	412	51.5	415	51.1
465.tonto	4	639	61.6	641	61.4	639	61.6	4	616	63.9	620	63.5	614	64.1
470.lbm	4	587	93.7	586	93.8	586	93.7	4	587	93.7	586	93.8	586	93.7
481.wrf	4	533	83.9	530	84.2	531	84.1	4	516	86.7	515	86.7	515	86.8
482.sphinx3	4	1244	62.7	1241	62.8	1244	62.7	4	1244	62.7	1241	62.8	1244	62.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 65.9

HA8000-bd (Intel Xeon E3-1220L)

SPECfp_rate_base2006 = 63.6

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages disabled with:
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 65.9

HA8000-bd (Intel Xeon E3-1220L)

SPECfp_rate_base2006 = 63.6

CPU2006 license: 35

Test date: Dec-2011

Test sponsor: HITACHI

Hardware Availability: Feb-2012

Tested by: HITACHI

Software Availability: Sep-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 65.9

HA8000-bd (Intel Xeon E3-1220L)

SPECfp_rate_base2006 = 63.6

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 65.9

HA8000-bd (Intel Xeon E3-1220L)

SPECfp_rate_base2006 = 63.6

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 02:14:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 March 2012.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>