



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x220
(Intel Xeon E5-2407, 2.20 GHz)

SPECfp®2006 = 51.4

SPECfp_base2006 = 49.3

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

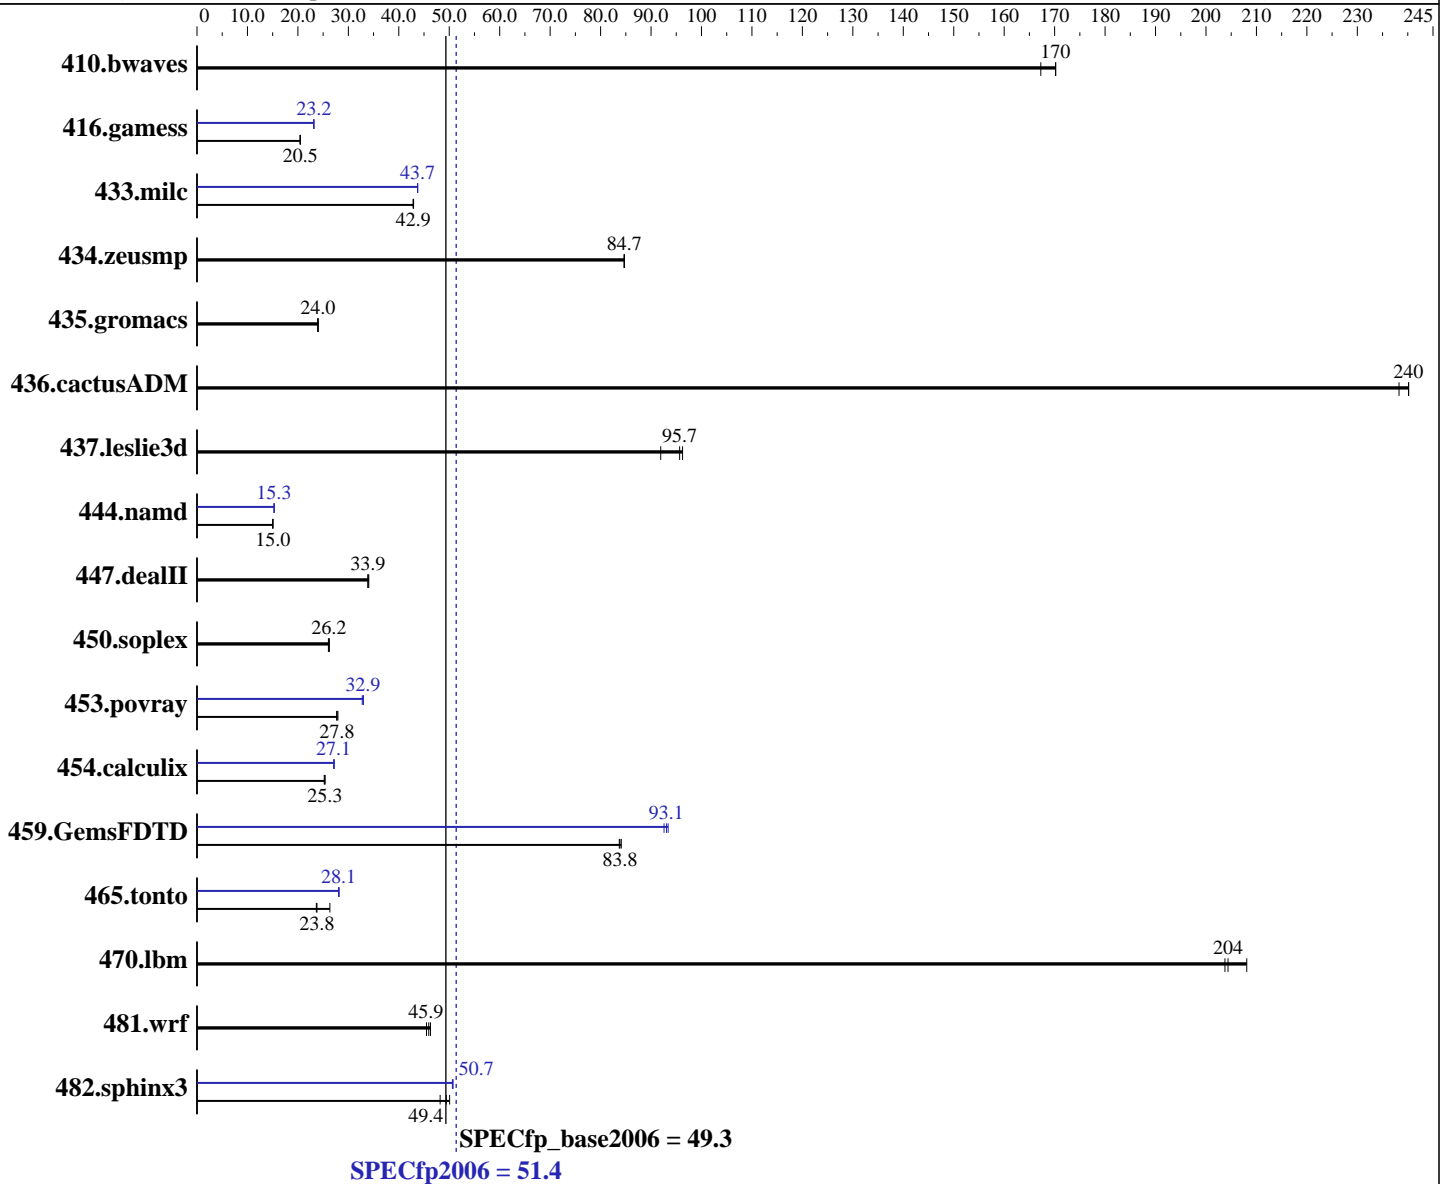

Hardware

CPU Name: Intel Xeon E5-2407
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x220
(Intel Xeon E5-2407, 2.20 GHz)

SPECfp2006 = **51.4**

SPECfp_base2006 = **49.3**

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 500 GB SAS, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	79.8	170	79.8	170	81.3	167	79.8	170	79.8	170	81.3	167
416.gamess	954	20.5	955	20.5	960	20.4	845	23.2	845	23.2	846	23.1
433.milc	214	42.9	214	42.8	214	42.9	210	43.7	210	43.7	210	43.7
434.zeusmp	107	84.7	107	84.7	107	84.7	107	84.7	107	84.7	107	84.7
435.gromacs	297	24.0	299	23.9	297	24.0	297	24.0	299	23.9	297	24.0
436.cactusADM	50.2	238	49.8	240	49.8	240	50.2	238	49.8	240	49.8	240
437.leslie3d	98.3	95.7	97.7	96.3	102	91.9	98.3	95.7	97.7	96.3	102	91.9
444.namd	534	15.0	533	15.0	533	15.0	525	15.3	524	15.3	525	15.3
447.dealII	336	34.1	338	33.9	338	33.9	336	34.1	338	33.9	338	33.9
450.soplex	318	26.2	319	26.2	320	26.0	318	26.2	319	26.2	320	26.0
453.povray	190	27.9	192	27.7	192	27.8	162	32.8	162	32.9	161	33.0
454.calculix	327	25.2	325	25.4	326	25.3	304	27.1	304	27.1	303	27.2
459.GemsFDTD	127	83.8	126	84.1	127	83.7	114	93.1	115	92.6	114	93.4
465.tonto	416	23.7	414	23.8	374	26.3	350	28.1	351	28.0	349	28.2
470.lbm	67.2	204	66.0	208	67.4	204	67.2	204	66.0	208	67.4	204
481.wrf	241	46.3	246	45.5	243	45.9	241	46.3	246	45.5	243	45.9
482.sphinx3	404	48.2	389	50.1	394	49.4	384	50.8	385	50.6	385	50.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Maximum Performance in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on kestral-pete Sat Jun 9 23:52:33 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x220
(Intel Xeon E5-2407, 2.20 GHz)

SPECfp2006 = 51.4

SPECfp_base2006 = 49.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Platform Notes (Continued)

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2407 0 @ 2.20GHz
    2 "physical id"s (chips)
    8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
  cache size : 10240 KB

From /proc/meminfo
MemTotal:      99045448 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux kestral-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 8 14:43

SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_kestralpete-lv_root
                ext4      449G  6.1G  420G   2% /

Additional information from dmidecode:
Memory:
  12x Micron 36JSF1G72PZ-1G6M1 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"
OMP_NUM_THREADS = "8"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x220
(Intel Xeon E5-2407, 2.20 GHz)

SPECfp2006 = 51.4

SPECfp_base2006 = 49.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

General Notes (Continued)

memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x220
(Intel Xeon E5-2407, 2.20 GHz)

SPECfp2006 = 51.4

SPECfp_base2006 = 49.3

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x220
(Intel Xeon E5-2407, 2.20 GHz)

SPECfp2006 = 51.4

SPECfp_base2006 = 49.3

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x220
(Intel Xeon E5-2407, 2.20 GHz)

SPECfp2006 = 51.4

SPECfp_base2006 = 49.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:47:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 July 2012.