



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 202

Express5800/B120d-h (Intel Xeon E5-2630L)

SPECint_rate_base2006 = 193

CPU2006 license: 9006


Test date: Jul-2012

Test sponsor: NEC Corporation

Hardware Availability: Jun-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

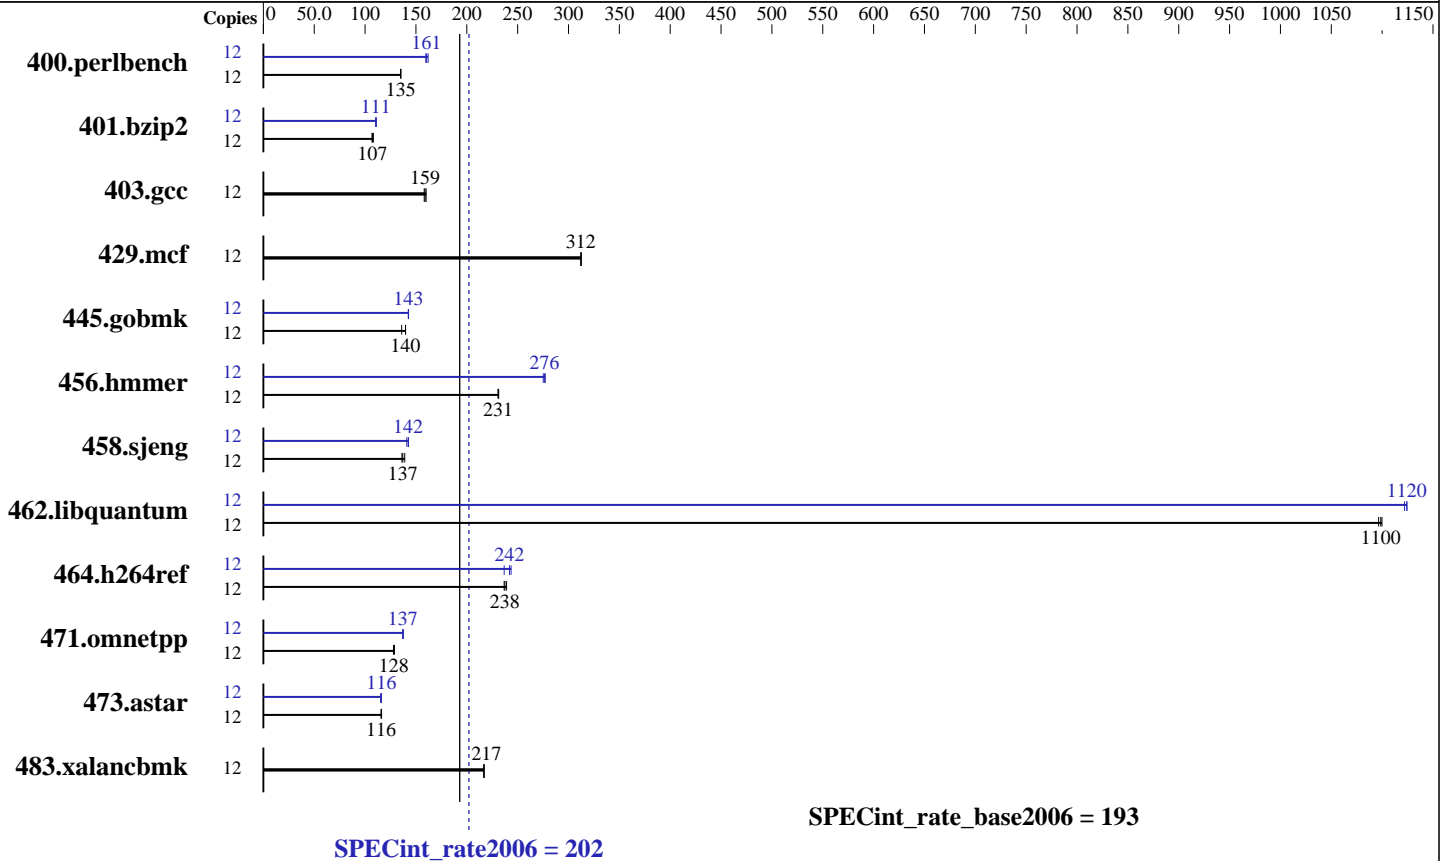

Hardware

CPU Name: Intel Xeon E5-2630L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 x 146.5 GB SAS, 15000 RPM
 Other Hardware: Express5800/AD106b for Disk Subsystem

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 202

Express5800/B120d-h (Intel Xeon E5-2630L)

SPECint_rate_base2006 = 193

CPU2006 license: 9006

Test date: Jul-2012

Test sponsor: NEC Corporation

Hardware Availability: Jun-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	868	135	868	135	868	135	12	734	160	724	162	730	161
401.bzip2	12	1084	107	1079	107	1071	108	12	1043	111	1048	111	1047	111
403.gcc	12	604	160	611	158	608	159	12	604	160	611	158	608	159
429.mcf	12	350	313	350	312	351	312	12	350	313	350	312	351	312
445.gobmk	12	901	140	926	136	900	140	12	882	143	882	143	884	142
456.hammer	12	484	231	485	231	485	231	12	405	276	407	275	404	277
458.sjeng	12	1045	139	1066	136	1059	137	12	1030	141	1020	142	1017	143
462.libquantum	12	226	1100	227	1100	226	1100	12	221	1120	221	1120	222	1120
464.h264ref	12	1111	239	1118	238	1122	237	12	1097	242	1122	237	1090	244
471.omnetpp	12	586	128	582	129	585	128	12	547	137	548	137	545	138
473.astar	12	725	116	728	116	727	116	12	726	116	726	116	731	115
483.xalancbmk	12	382	217	382	217	381	217	12	382	217	382	217	381	217

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Added glibc-static-2.12-1.47.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 202

Express5800/B120d-h (Intel Xeon E5-2630L)

SPECint_rate_base2006 = 193

CPU2006 license: 9006

Test date: Jul-2012

Test sponsor: NEC Corporation

Hardware Availability: Jun-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

General Notes (Continued)

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 202

Express5800/B120d-h (Intel Xeon E5-2630L)

SPECint_rate_base2006 = 193

CPU2006 license: 9006

Test date: Jul-2012

Test sponsor: NEC Corporation

Hardware Availability: Jun-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: -xAVX -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 202

Express5800/B120d-h (Intel Xeon E5-2630L)

SPECint_rate_base2006 = 193

CPU2006 license: 9006

Test date: Jul-2012

Test sponsor: NEC Corporation

Hardware Availability: Jun-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:26:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 July 2012.