



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4607, 2.20 GHz)

SPECfp®2006 = **56.9**

SPECfp\_base2006 = **54.1**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: Jul-2012

Software Availability: Dec-2011

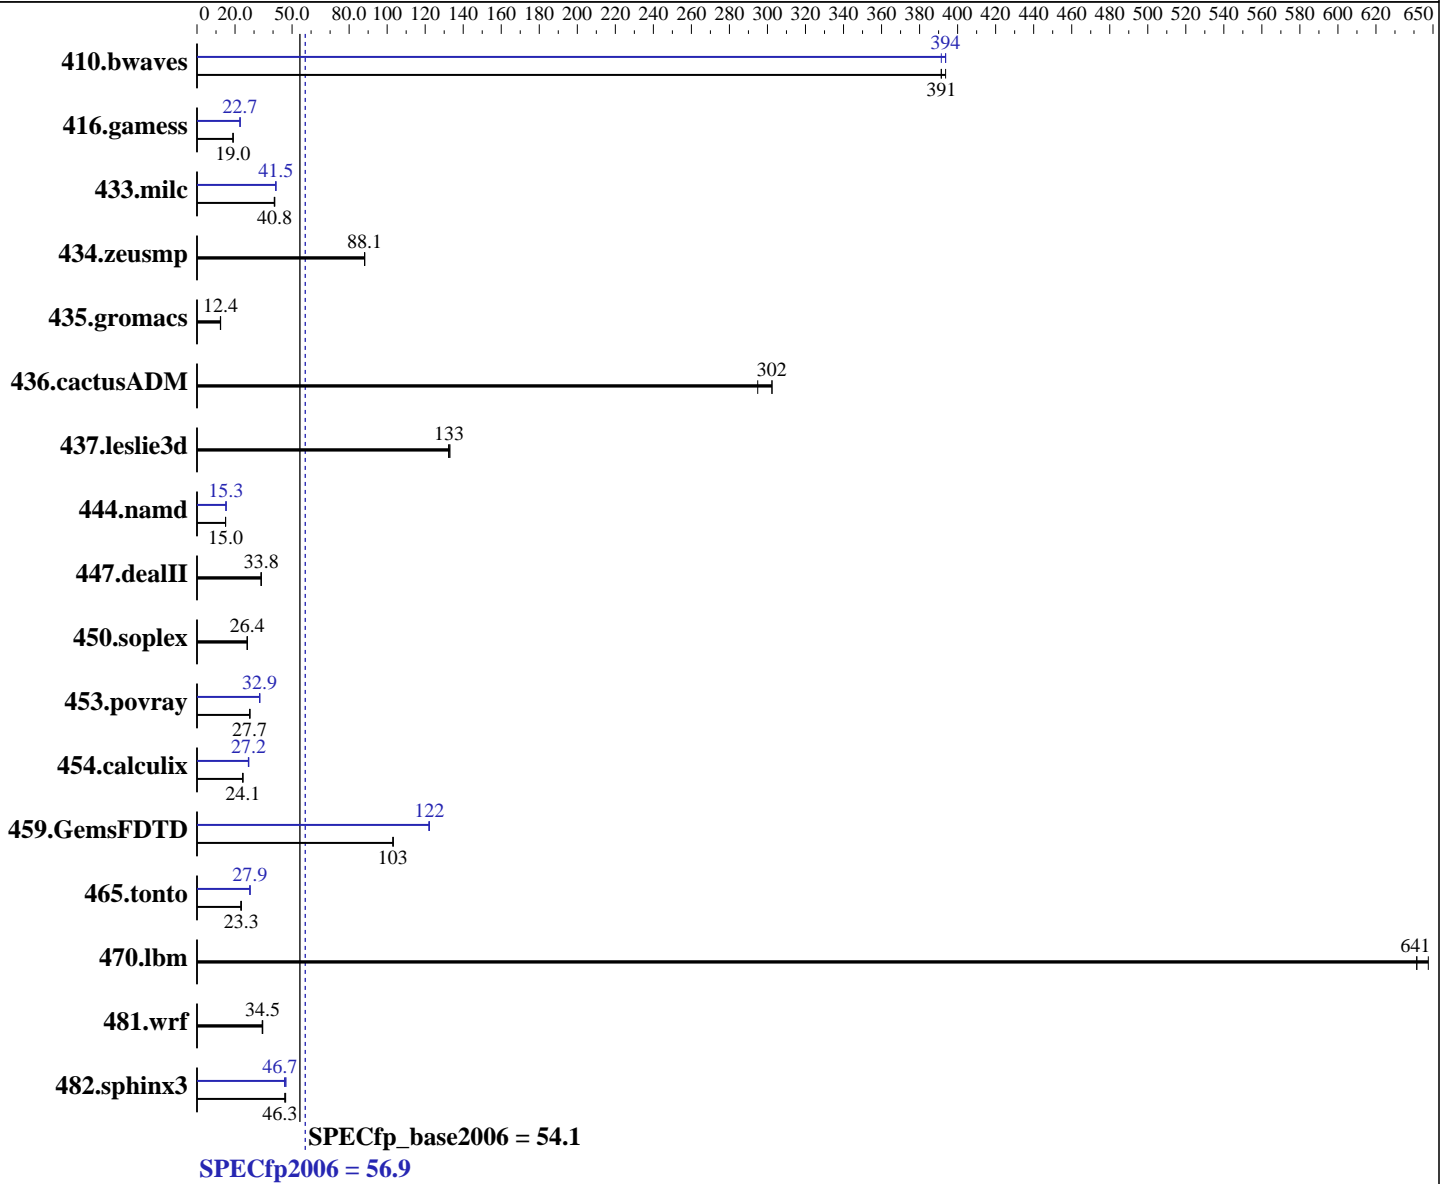

### Hardware

CPU Name: Intel Xeon E5-4607  
 CPU Characteristics:  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4607, 2.20 GHz)

SPECfp2006 = **56.9**

SPECfp\_base2006 = **54.1**

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2012  
Hardware Availability: Jul-2012  
Software Availability: Dec-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	34.7	391	<b>34.7</b>	<b>391</b>	34.5	394	34.7	391	<b>34.5</b>	<b>394</b>	34.5	394
416.gamess	<b>1032</b>	<b>19.0</b>	1031	19.0	1034	18.9	<b>864</b>	<b>22.7</b>	865	22.6	864	22.7
433.milc	226	40.6	225	40.9	<b>225</b>	<b>40.8</b>	221	41.5	<b>221</b>	<b>41.5</b>	222	41.4
434.zeusmp	<b>103</b>	<b>88.1</b>	103	88.3	103	88.1	<b>103</b>	<b>88.1</b>	103	88.3	103	88.1
435.gromacs	581	12.3	<b>576</b>	<b>12.4</b>	575	12.4	581	12.3	<b>576</b>	<b>12.4</b>	575	12.4
436.cactusADM	40.5	295	<b>39.5</b>	<b>302</b>	39.5	302	40.5	295	<b>39.5</b>	<b>302</b>	39.5	302
437.leslie3d	71.1	132	70.7	133	<b>70.9</b>	<b>133</b>	71.1	132	70.7	133	<b>70.9</b>	<b>133</b>
444.namd	<b>534</b>	<b>15.0</b>	534	15.0	534	15.0	526	15.3	<b>525</b>	<b>15.3</b>	525	15.3
447.dealII	338	33.8	339	33.7	<b>339</b>	<b>33.8</b>	338	33.8	339	33.7	<b>339</b>	<b>33.8</b>
450.soplex	316	26.4	<b>316</b>	<b>26.4</b>	315	26.5	316	26.4	<b>316</b>	<b>26.4</b>	315	26.5
453.povray	<b>192</b>	<b>27.7</b>	191	27.9	192	27.7	161	33.1	<b>162</b>	<b>32.9</b>	162	32.9
454.calculix	342	24.1	343	24.0	<b>342</b>	<b>24.1</b>	303	27.2	305	27.0	<b>304</b>	<b>27.2</b>
459.GemsFDTD	<b>103</b>	<b>103</b>	103	103	103	103	86.8	122	<b>86.8</b>	<b>122</b>	87.0	122
465.tonto	422	23.3	<b>422</b>	<b>23.3</b>	427	23.0	353	27.9	353	27.9	<b>353</b>	<b>27.9</b>
470.lbm	<b>21.4</b>	<b>641</b>	21.4	641	21.2	648	<b>21.4</b>	<b>641</b>	21.4	641	21.2	648
481.wrf	326	34.3	323	34.6	<b>324</b>	<b>34.5</b>	326	34.3	323	34.6	<b>324</b>	<b>34.5</b>
482.sphinx3	422	46.2	418	46.6	<b>421</b>	<b>46.3</b>	417	46.7	423	46.0	<b>417</b>	<b>46.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on kong-pete Wed Jul 18 01:11:59 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp2006 = 56.9**

IBM System x3750 M4  
(Intel Xeon E5-4607, 2.20 GHz)

**SPECfp\_base2006 = 54.1**

**CPU2006 license:** 11

**Test date:** Jul-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jul-2012

**Tested by:** IBM Corporation

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-4607 0 @ 2.20GHz
  4 "physical id"s (chips)
  48 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 6
    siblings  : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
    physical 2: cores 0 1 2 3 4 5
    physical 3: cores 0 1 2 3 4 5
  cache size : 12288 KB

From /proc/meminfo
  MemTotal:      264507224 kB
  HugePages_Total:      0
  Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
  redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
  system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux kong-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 17 15:52

SPEC is set to: /cpu2006.1.2
  Filesystem      Type      Size  Used Avail Use% Mounted on
  /dev/mapper/vg_kongpete-lv_root
    ext4          264G    6.0G   245G   3% /

Additional information from dmidecode:
  Memory:
  11x Hynix HMT31GR7CFR4C-PB 8 GB 1600 MHz 2 rank
  15x Micron 36JSF1G72PZ-1G6M1 8 GB 1600 MHz 2 rank
  6x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp2006 = 56.9**

IBM System x3750 M4  
(Intel Xeon E5-4607, 2.20 GHz)

**SPECfp\_base2006 = 54.1**

**CPU2006 license:** 11

**Test date:** Jul-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jul-2012

**Tested by:** IBM Corporation

**Software Availability:** Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"
OMP_NUM_THREADS = "24"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages disabled with:

```
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4607, 2.20 GHz)

**SPECfp2006 = 56.9**

**SPECfp\_base2006 = 54.1**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

`470.lbm: basepeak = yes`

`482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4607, 2.20 GHz)

**SPECfp2006 = 56.9**

**SPECfp\_base2006 = 54.1**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4607, 2.20 GHz)

**SPECfp2006 = 56.9**

**SPECfp\_base2006 = 54.1**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Dec-2011

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Mon Sep 15 15:47:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 August 2012.