



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECfp<sup>®</sup>2006 = 68.0**

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

**SPECfp\_base2006 = 65.6**

CPU2006 license: 19


Test date: Jun-2012

Test sponsor: Fujitsu

Hardware Availability: Jul-2012

Tested by: Fujitsu

Software Availability: Feb-2012

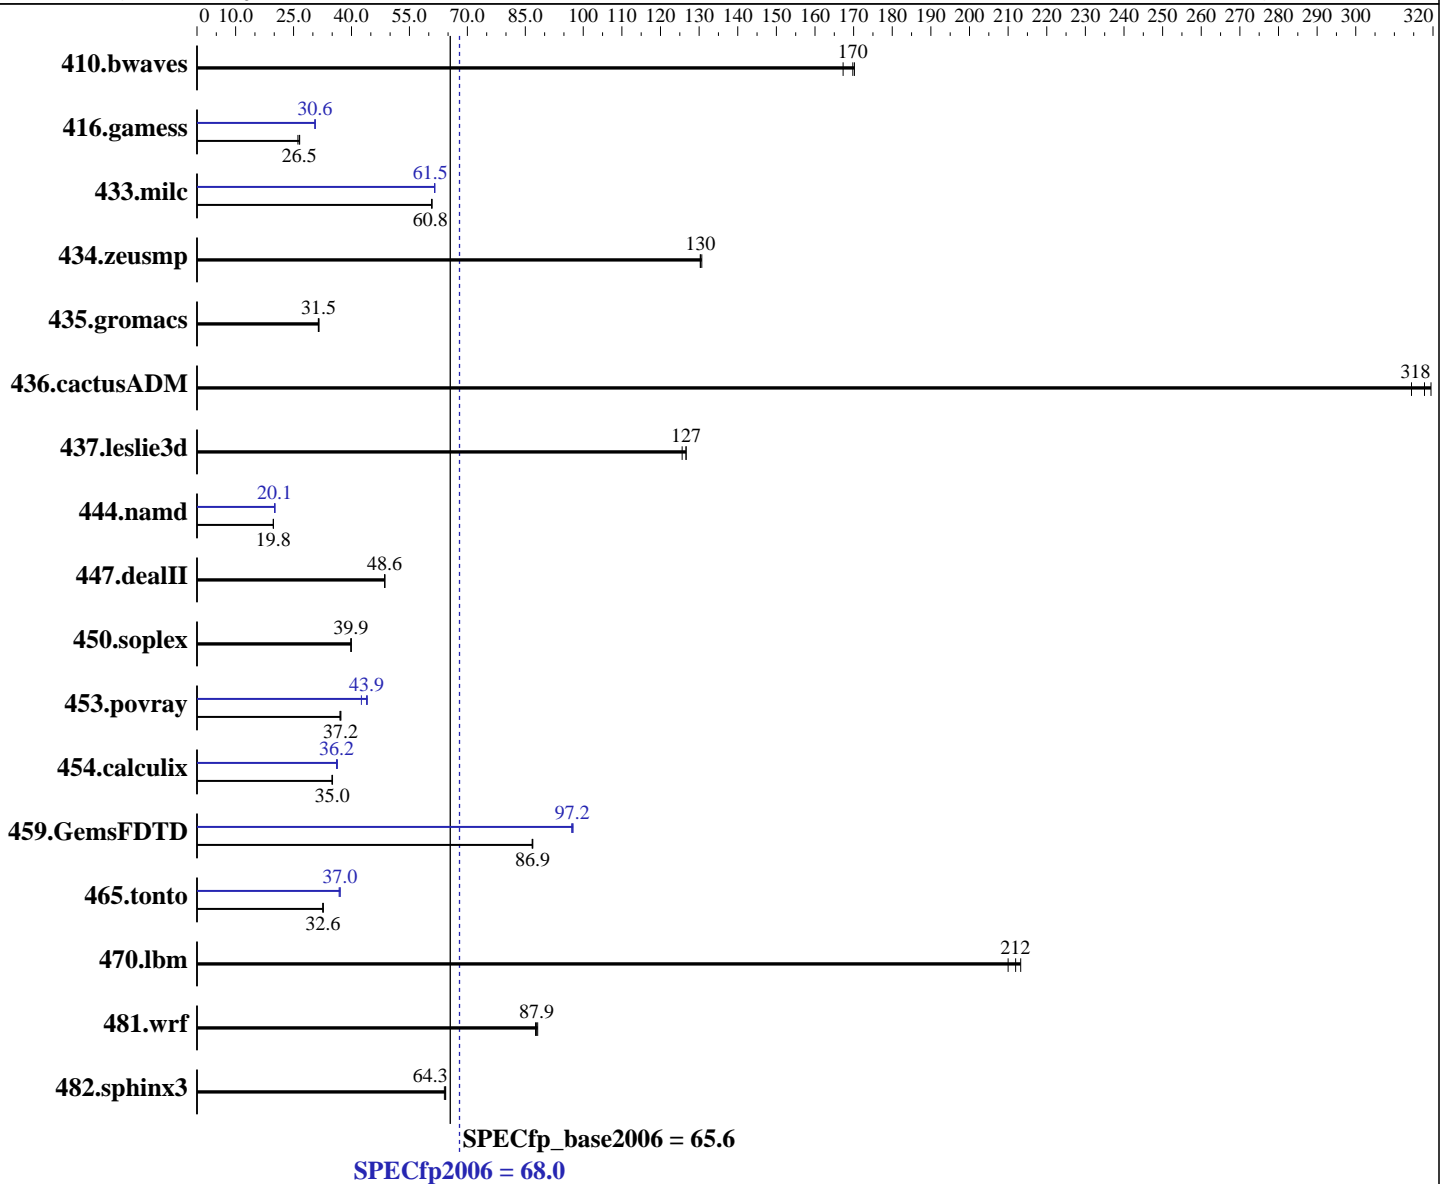

**Hardware**

CPU Name: Intel Xeon E5-2450  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **68.0**

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECfp\_base2006 = **65.6**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	81.2	167	79.8	170	<b>80.0</b>	<b>170</b>	81.2	167	79.8	170	<b>80.0</b>	<b>170</b>
416.gamess	737	26.6	<b>739</b>	<b>26.5</b>	749	26.1	641	30.5	<b>640</b>	<b>30.6</b>	640	30.6
433.milc	151	60.8	151	60.7	<b>151</b>	<b>60.8</b>	<b>149</b>	<b>61.5</b>	149	61.6	149	61.5
434.zeusmp	69.6	131	69.8	130	<b>69.8</b>	<b>130</b>	69.6	131	69.8	130	<b>69.8</b>	<b>130</b>
435.gromacs	226	31.6	<b>227</b>	<b>31.5</b>	227	31.4	226	31.6	<b>227</b>	<b>31.5</b>	227	31.4
436.cactusADM	37.4	319	<b>37.6</b>	<b>318</b>	38.0	314	37.4	319	<b>37.6</b>	<b>318</b>	38.0	314
437.leslie3d	74.8	126	74.2	127	<b>74.2</b>	<b>127</b>	74.8	126	74.2	127	<b>74.2</b>	<b>127</b>
444.namd	<b>405</b>	<b>19.8</b>	406	19.8	405	19.8	398	20.1	398	20.1	<b>398</b>	<b>20.1</b>
447.dealII	235	48.7	<b>235</b>	<b>48.6</b>	236	48.6	235	48.7	<b>235</b>	<b>48.6</b>	236	48.6
450.soplex	209	39.9	<b>209</b>	<b>39.9</b>	209	39.9	209	39.9	<b>209</b>	<b>39.9</b>	209	39.9
453.povray	<b>143</b>	<b>37.2</b>	143	37.2	144	37.0	<b>121</b>	<b>43.9</b>	125	42.6	121	44.1
454.calculix	236	35.0	<b>236</b>	<b>35.0</b>	235	35.1	<b>228</b>	<b>36.2</b>	228	36.2	227	36.3
459.GemsFDTD	122	86.8	<b>122</b>	<b>86.9</b>	122	86.9	<b>109</b>	<b>97.2</b>	109	97.4	109	97.0
465.tonto	301	32.7	<b>302</b>	<b>32.6</b>	302	32.6	267	36.8	266	37.1	<b>266</b>	<b>37.0</b>
470.lbm	64.4	213	65.4	210	<b>64.8</b>	<b>212</b>	64.4	213	65.4	210	<b>64.8</b>	<b>212</b>
481.wrf	127	87.6	127	88.2	<b>127</b>	<b>87.9</b>	127	87.6	127	88.2	<b>127</b>	<b>87.9</b>
482.sphinx3	303	64.4	304	64.0	<b>303</b>	<b>64.3</b>	303	64.4	304	64.0	<b>303</b>	<b>64.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Platform Notes

BIOS configuration:  
 Intel HT Technology = Disable  
 Frequency Floor Override = Enable



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 68.0**

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

**SPECfp\_base2006 = 65.6**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x E3-1270v2 CPU + 32 GB memory using RHEL6.2

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deall: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 68.0**

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

**SPECfp\_base2006 = 65.6**

CPU2006 license: 19

Test date: Jun-2012

Test sponsor: Fujitsu

Hardware Availability: Jul-2012

Tested by: Fujitsu

Software Availability: Feb-2012

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 68.0**

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

**SPECfp\_base2006 = 65.6**

**CPU2006 license:** 19

**Test date:** Jun-2012

**Test sponsor:** Fujitsu

**Hardware Availability:** Jul-2012

**Tested by:** Fujitsu

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 68.0

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECfp\_base2006 = 65.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:11:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 August 2012.