



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>2006 = 84.4

### Huawei XH620 V2 (Intel Xeon E5-2665)

SPECfp\_base2006 = 80.6

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

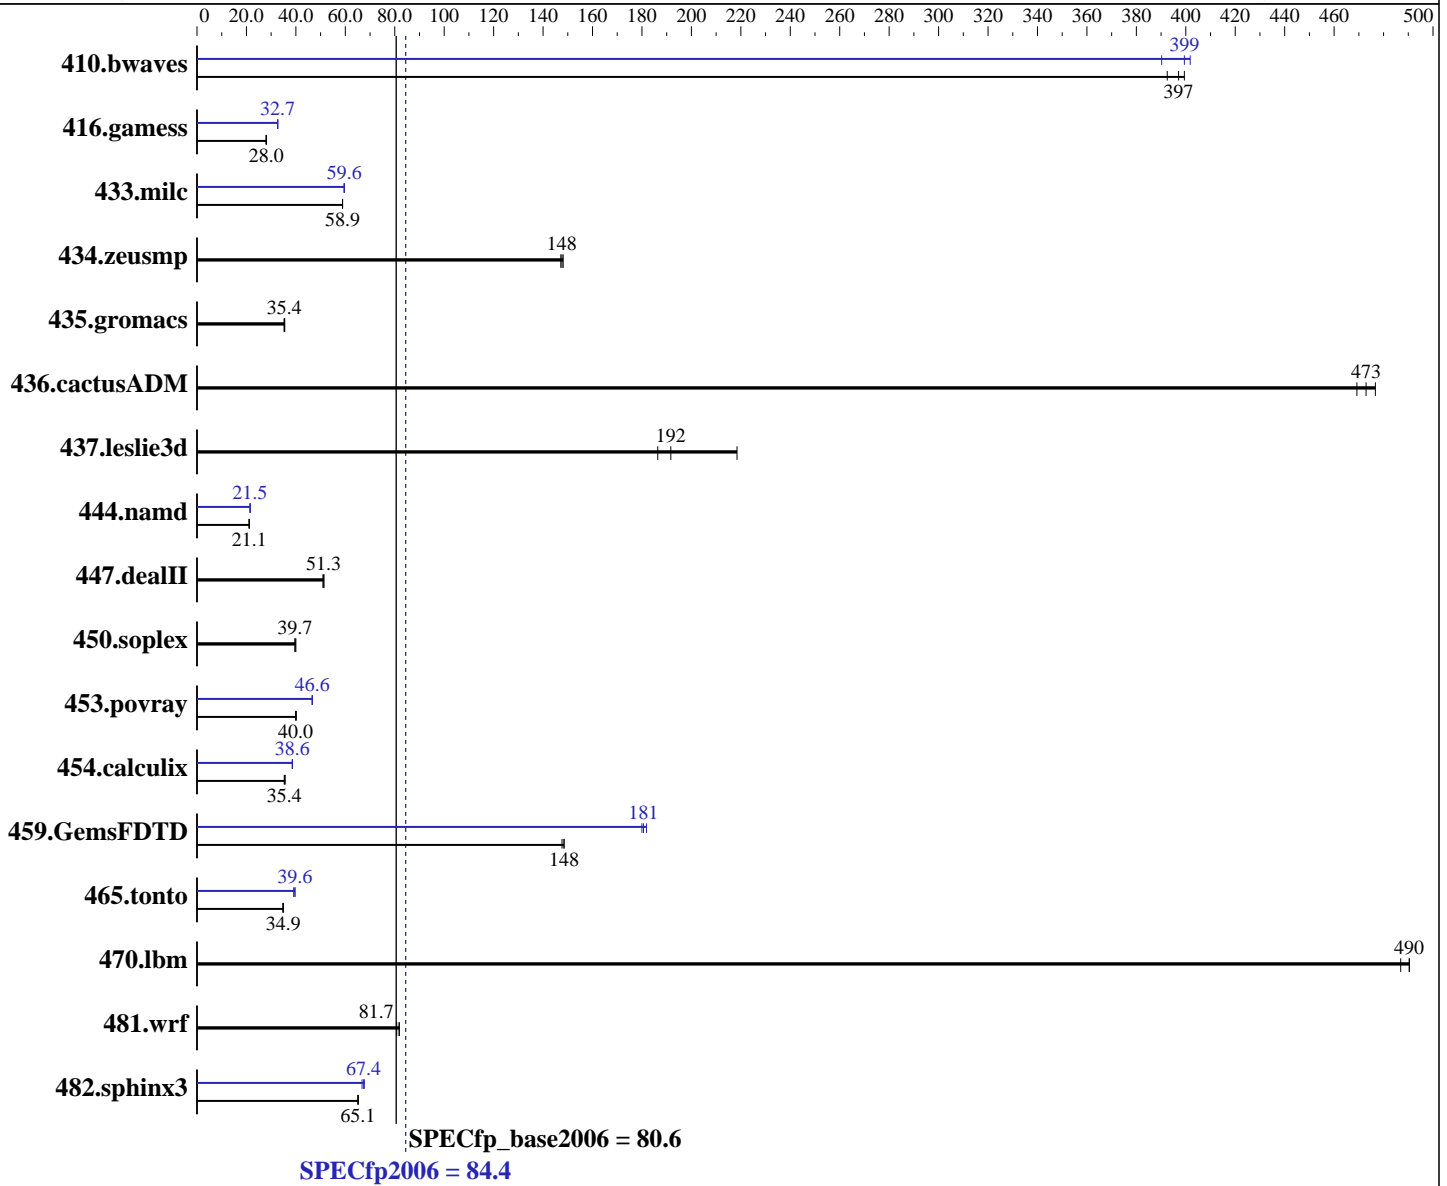

### Hardware

CPU Name: Intel Xeon E5-2665  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = 84.4

## Huawei XH620 V2 (Intel Xeon E5-2665)

SPECfp\_base2006 = 80.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	34.6	392	<b><u>34.2</u></b>	<b><u>397</u></b>	34.0	399	33.8	402	<b><u>34.0</u></b>	<b><u>399</u></b>	34.8	390
416.gamess	<b><u>700</u></b>	<b><u>28.0</u></b>	696	28.1	700	28.0	600	32.6	<b><u>600</u></b>	<b><u>32.7</u></b>	600	32.7
433.milc	156	58.9	<b><u>156</u></b>	<b><u>58.9</u></b>	156	58.9	154	59.6	<b><u>154</u></b>	<b><u>59.6</u></b>	154	59.5
434.zeusmp	<b><u>61.6</u></b>	<b><u>148</u></b>	61.4	148	61.8	147	<b><u>61.6</u></b>	<b><u>148</u></b>	61.4	148	61.8	147
435.gromacs	201	35.5	203	35.2	<b><u>202</u></b>	<b><u>35.4</u></b>	201	35.5	203	35.2	<b><u>202</u></b>	<b><u>35.4</u></b>
436.cactusADM	<b><u>25.3</u></b>	<b><u>473</u></b>	25.5	469	25.1	477	<b><u>25.3</u></b>	<b><u>473</u></b>	25.5	469	25.1	477
437.leslie3d	<b><u>49.0</u></b>	<b><u>192</u></b>	50.4	186	43.0	218	<b><u>49.0</u></b>	<b><u>192</u></b>	50.4	186	43.0	218
444.namd	380	21.1	380	21.1	<b><u>380</u></b>	<b><u>21.1</u></b>	374	21.5	<b><u>373</u></b>	<b><u>21.5</u></b>	373	21.5
447.dealII	223	51.3	225	50.9	<b><u>223</u></b>	<b><u>51.3</u></b>	223	51.3	225	50.9	<b><u>223</u></b>	<b><u>51.3</u></b>
450.soplex	208	40.0	210	39.6	<b><u>210</u></b>	<b><u>39.7</u></b>	208	40.0	210	39.6	<b><u>210</u></b>	<b><u>39.7</u></b>
453.povray	133	39.9	132	40.2	<b><u>133</u></b>	<b><u>40.0</u></b>	<b><u>114</u></b>	<b><u>46.6</u></b>	114	46.6	114	46.7
454.calculix	231	35.7	234	35.3	<b><u>233</u></b>	<b><u>35.4</u></b>	214	38.6	214	38.6	<b><u>214</u></b>	<b><u>38.6</u></b>
459.GemsFDTD	71.9	148	71.5	148	<b><u>71.5</u></b>	<b><u>148</u></b>	<b><u>58.7</u></b>	<b><u>181</u></b>	58.3	182	59.0	180
465.tonto	<b><u>282</u></b>	<b><u>34.9</u></b>	282	34.9	283	34.8	248	39.6	<b><u>248</u></b>	<b><u>39.6</u></b>	252	39.1
470.lbm	<b><u>28.0</u></b>	<b><u>490</u></b>	28.2	487	28.0	490	<b><u>28.0</u></b>	<b><u>490</u></b>	28.2	487	28.0	490
481.wrf	136	81.9	138	80.8	<b><u>137</u></b>	<b><u>81.7</u></b>	136	81.9	138	80.8	<b><u>137</u></b>	<b><u>81.7</u></b>
482.sphinx3	298	65.3	299	65.1	<b><u>299</u></b>	<b><u>65.1</u></b>	292	66.8	288	67.7	<b><u>289</u></b>	<b><u>67.4</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
 Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:  
 Intel Hyper-Threading set to Disabled  
 Set Power Efficiency Mode to Performance  
 Sysinfo program /spec/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on RH62-rebuild Thu Sep 6 15:31:01 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 84.4

Huawei XH620 V2 (Intel Xeon E5-2665)

SPECfp\_base2006 = 80.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2665 0 @ 2.40GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores      : 8
  siblings       : 8
  physical 0:    cores 0 1 2 3 4 5 6 7
  physical 1:    cores 0 1 2 3 4 5 6 7
cache size      : 20480 KB

```

```

From /proc/meminfo
MemTotal:        132124032 kB
HugePages_Total: 0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux RH62-rebuild 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 6 09:03

```

SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      289G  254G   21G  93% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "16"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 84.4

Huawei XH620 V2 (Intel Xeon E5-2665)

SPECfp\_base2006 = 80.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 84.4

Huawei XH620 V2 (Intel Xeon E5-2665)

SPECfp\_base2006 = 80.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 84.4

Huawei XH620 V2 (Intel Xeon E5-2665)

SPECfp\_base2006 = 80.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:05:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 November 2012.