



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp[®]_rate2006 = 78.6

Intel DH77KC Motherboard (Intel Core i3-3220)

SPECfp_rate_base2006 = 78.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2012

Hardware Availability: Sep-2012

Software Availability: Apr-2011

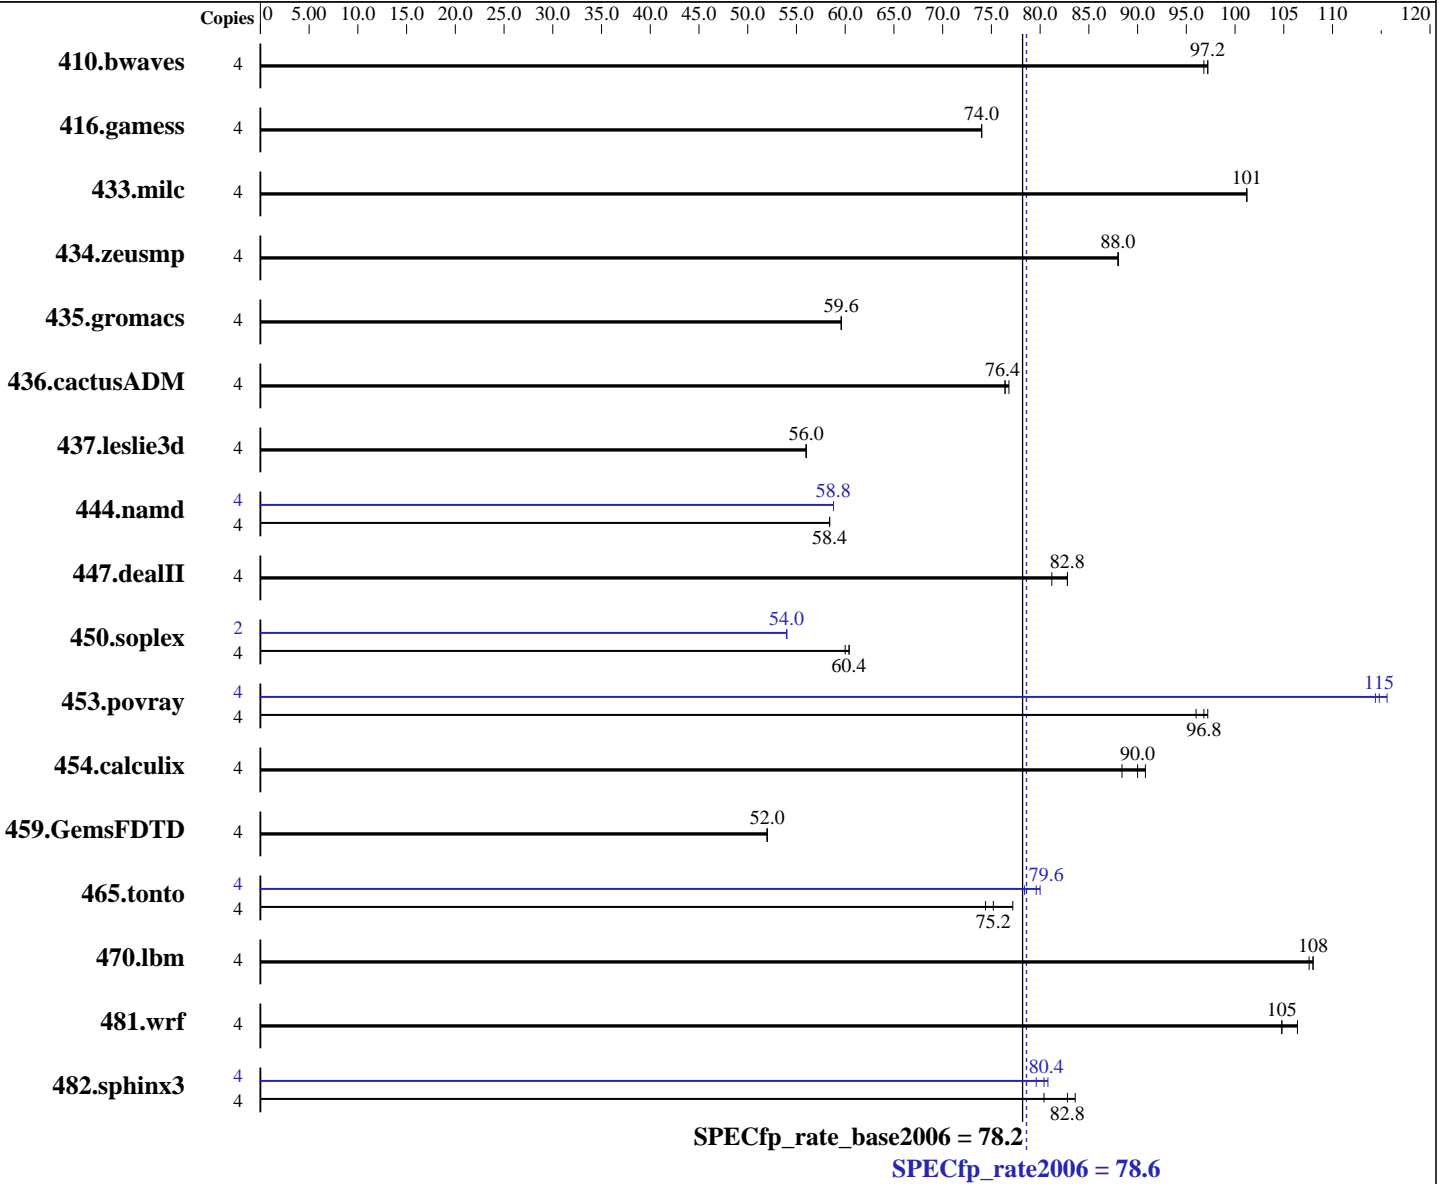

Hardware

CPU Name: Intel Core i3-3220
 CPU Characteristics:
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 7 Ultimate
 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 12.1.0.229 of Intel C++ Studio XE for Windows;
 Fortran: Version 12.1.0.229 of Intel Fortran Studio XE for Windows;
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = **78.6**

Intel DH77KC Motherboard (Intel Core i3-3220)

SPECfp_rate_base2006 = **78.2**

CPU2006 license: 13

Test date: Sep-2012

Test sponsor: Intel Corporation

Hardware Availability: Sep-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-12800U-9)
 Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	559	97.2	560	97.2	561	96.8	4	559	97.2	560	97.2	561	96.8		
416.gamess	4	1056	74.0	1057	74.0	1056	74.0	4	1056	74.0	1057	74.0	1056	74.0		
433.milc	4	363	101	363	101	363	101	4	363	101	363	101	363	101		
434.zeusmp	4	414	88.0	413	88.0	413	88.0	4	414	88.0	413	88.0	413	88.0		
435.gromacs	4	479	59.6	479	59.6	478	59.6	4	479	59.6	479	59.6	478	59.6		
436.cactusADM	4	625	76.4	624	76.4	624	76.8	4	625	76.4	624	76.4	624	76.8		
437.leslie3d	4	672	56.0	672	56.0	672	56.0	4	672	56.0	672	56.0	672	56.0		
444.namd	4	550	58.4	551	58.4	550	58.4	4	546	58.8	546	58.8	546	58.8		
447.dealII	4	554	82.8	564	81.2	552	82.8	4	554	82.8	564	81.2	552	82.8		
450.soplex	4	553	60.4	554	60.4	557	60.0	2	309	54.0	309	54.0	309	54.0		
453.povray	4	220	96.8	221	96.0	219	97.2	4	184	116	186	114	185	115		
454.calculix	4	367	90.0	364	90.8	373	88.4	4	367	90.0	364	90.8	373	88.4		
459.GemsFDTD	4	818	52.0	818	52.0	818	52.0	4	818	52.0	818	52.0	818	52.0		
465.tonto	4	528	74.4	511	77.2	522	75.2	4	502	78.4	492	80.0	495	79.6		
470.lbm	4	510	108	510	108	509	108	4	510	108	510	108	509	108		
481.wrf	4	420	106	426	105	426	105	4	420	106	426	105	426	105		
482.sphinx3	4	934	83.6	969	80.4	940	82.8	4	980	79.6	969	80.4	965	80.8		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

ipsxe-comp-vars batch file invoked with intel64

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 78.6

Intel DH77KC Motherboard (Intel Core i3-3220)

SPECfp_rate_base2006 = 78.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2012

Hardware Availability: Sep-2012

Software Availability: Apr-2011

Platform Notes

Sysinfo program C:\CPU200~1.17A\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on CltE840F20AA165 Thu Sep 20 19:11:10 2012

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 7 Ultimate
OS Version : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model : DH77KC_
Processor(s) : 1 Processor(s) Installed.
 [01]: Intel64 Family 6 Model 58 Stepping 9 GenuineIntel ~3300 Mhz
BIOS Version : Intel Corp. KCH7710H.86A.0095.2012.0608.1754, 6/8/2012
Total Physical Memory: 8,092 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 512
L3CacheSize : 3072
MaxClockSpeed : 3300
Name : Intel(R) Core(TM) i3-3220 CPU @ 3.30GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 78.6

Intel DH77KC Motherboard (Intel Core i3-3220)

SPECfp_rate_base2006 = 78.2

CPU2006 license: 13

Test date: Sep-2012

Test sponsor: Intel Corporation

Hardware Availability: Sep-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 78.6

Intel DH77KC Motherboard (Intel Core i3-3220)

SPECfp_rate_base2006 = 78.2

CPU2006 license: 13

Test date: Sep-2012

Test sponsor: Intel Corporation

Hardware Availability: Sep-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -QxAVX -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1w64M.lib
-link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qauto-ilp32 /F1000000000 sh1w64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000
sh1w64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 78.6

Intel DH77KC Motherboard (Intel Core i3-3220)

SPECfp_rate_base2006 = 78.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2012

Hardware Availability: Sep-2012

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:17:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 November 2012.