



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint<sup>®</sup>\_rate2006 = 720

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4607)

SPECint\_rate\_base2006 = 696

CPU2006 license: 3


Test date: May-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2012

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

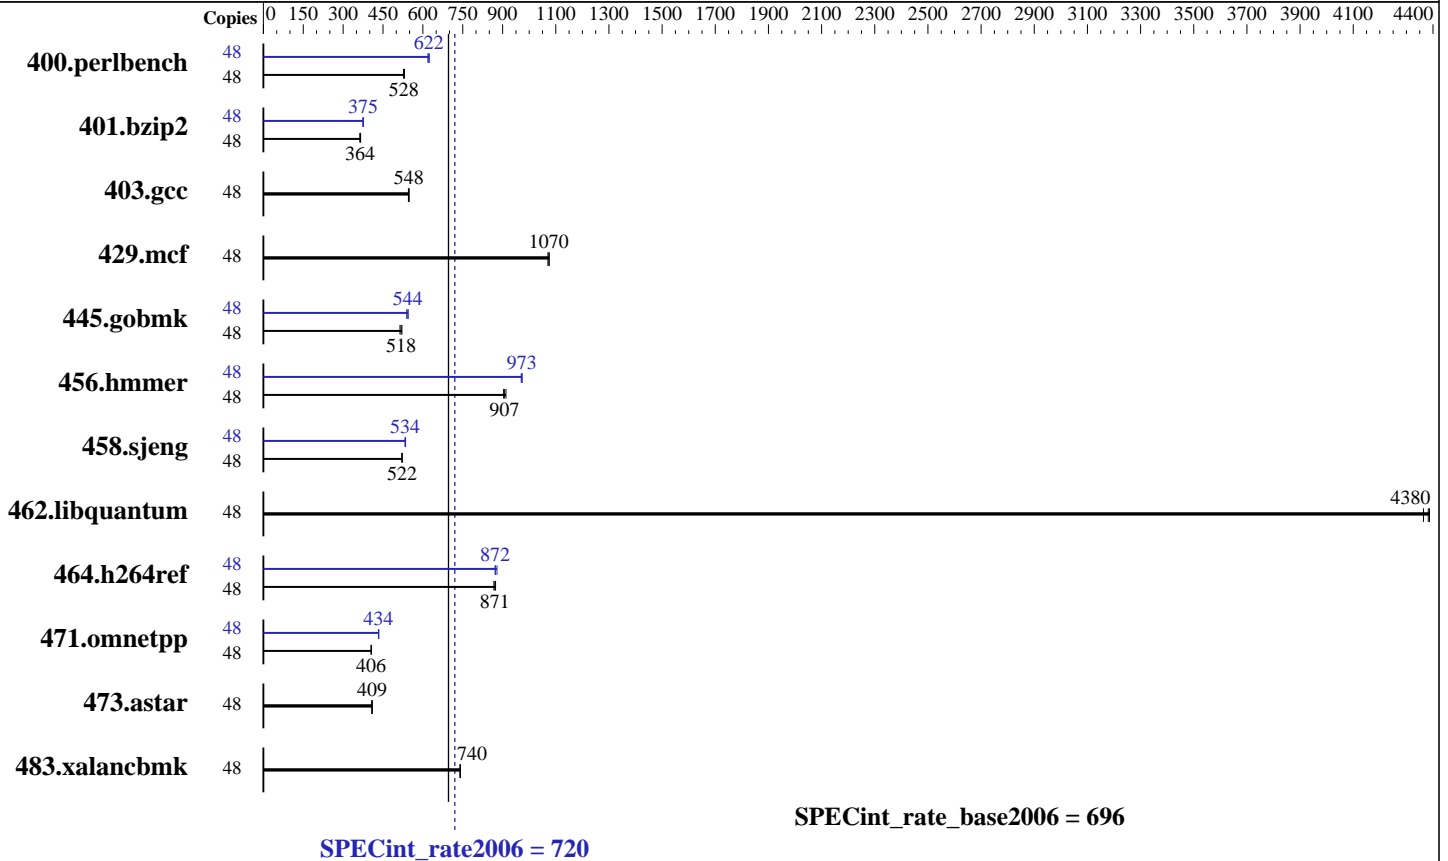

### Hardware

CPU Name: Intel Xeon E5-4607  
 CPU Characteristics:  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-10600R-9, ECC)  
 Disk Subsystem: 2 x 146 GB 15 K SAS, 1+0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4,  
 Kernel 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 13.0.0.133 of Intel C++  
 Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 720

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4607)

SPECint\_rate\_base2006 = 696

CPU2006 license: 3

Test date: May-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2012

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	<b>888</b>	<b>528</b>	888	528	884	531	48	752	624	758	619	<b>753</b>	<b>622</b>
401.bzip2	48	1266	366	1276	363	<b>1272</b>	<b>364</b>	48	1235	375	1233	376	<b>1234</b>	<b>375</b>
403.gcc	48	708	546	<b>706</b>	<b>548</b>	705	548	48	708	546	<b>706</b>	<b>548</b>	705	548
429.mcf	48	<b>407</b>	<b>1070</b>	409	1070	407	1080	48	<b>407</b>	<b>1070</b>	409	1070	407	1080
445.gobmk	48	966	521	<b>972</b>	<b>518</b>	980	514	48	<b>926</b>	<b>544</b>	934	539	925	544
456.hammer	48	<b>494</b>	<b>907</b>	496	904	491	913	48	462	970	<b>460</b>	<b>973</b>	460	973
458.sjeng	48	1112	522	<b>1113</b>	<b>522</b>	1115	521	48	1090	533	1086	535	<b>1088</b>	<b>534</b>
462.libquantum	48	<b>227</b>	<b>4380</b>	228	4360	227	4390	48	<b>227</b>	<b>4380</b>	228	4360	227	4390
464.h264ref	48	<b>1220</b>	<b>871</b>	1216	873	1225	867	48	1209	879	<b>1218</b>	<b>872</b>	1218	872
471.omnetpp	48	<b>739</b>	<b>406</b>	741	405	738	407	48	691	434	<b>692</b>	<b>434</b>	693	433
473.astar	48	826	408	823	410	<b>824</b>	<b>409</b>	48	826	408	823	410	<b>824</b>	<b>409</b>
483.xalancbmk	48	447	740	447	741	<b>447</b>	<b>740</b>	48	447	740	447	741	<b>447</b>	<b>740</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Drive Write Cache set to Enabled in HP Array Configuration Utility, CLI version  
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write in HP Array Configuration Utility, CLI version

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Maximum Performance  
Memory Power Savings Mode set to Maximum Performance  
Thermal Configuration set to Maximum Cooling  
Collaborative Power Control set to Disabled  
Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /cpu2006/config/sysinfo.rev6818  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4607)

SPECint\_rate2006 = 720

SPECint\_rate\_base2006 = 696

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** May-2013  
**Hardware Availability:** Dec-2012  
**Software Availability:** Feb-2013

### Platform Notes (Continued)

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on BL660c-Gen8-4P2 Thu Jun 13 13:14:08 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4607 0 @ 2.20GHz
 4 "physical id"s (chips)
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
  physical 2: cores 0 1 2 3 4 5
  physical 3: cores 0 1 2 3 4 5
cache size : 12288 KB
```

```
From /proc/meminfo
MemTotal:      264485124 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux BL660c-Gen8-4P2 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 13 13:07
```

```
SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3       ext4     133G  7.7G  118G   7% /
```

```
Additional information from dmidecode:
BIOS HP I32 12/14/2012
Memory:
 32x HP Not Specified 8 GB 1067 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 720**

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4607)

**SPECint\_rate\_base2006 = 696**

**CPU2006 license:** 3

**Test date:** May-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Dec-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 720**

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4607)

**SPECint\_rate\_base2006 = 696**

**CPU2006 license:** 3

**Test date:** May-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Dec-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 720**

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4607)

**SPECint\_rate\_base2006 = 696**

**CPU2006 license:** 3

**Test date:** May-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Dec-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.html>

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:24:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 July 2013.