



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

**SPECint®2006 = 59.8**

Express5800/R110f-1E (Intel Xeon E3-1230 v3)

**SPECint\_base2006 = 57.4**

CPU2006 license: 9006


Test date: Aug-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

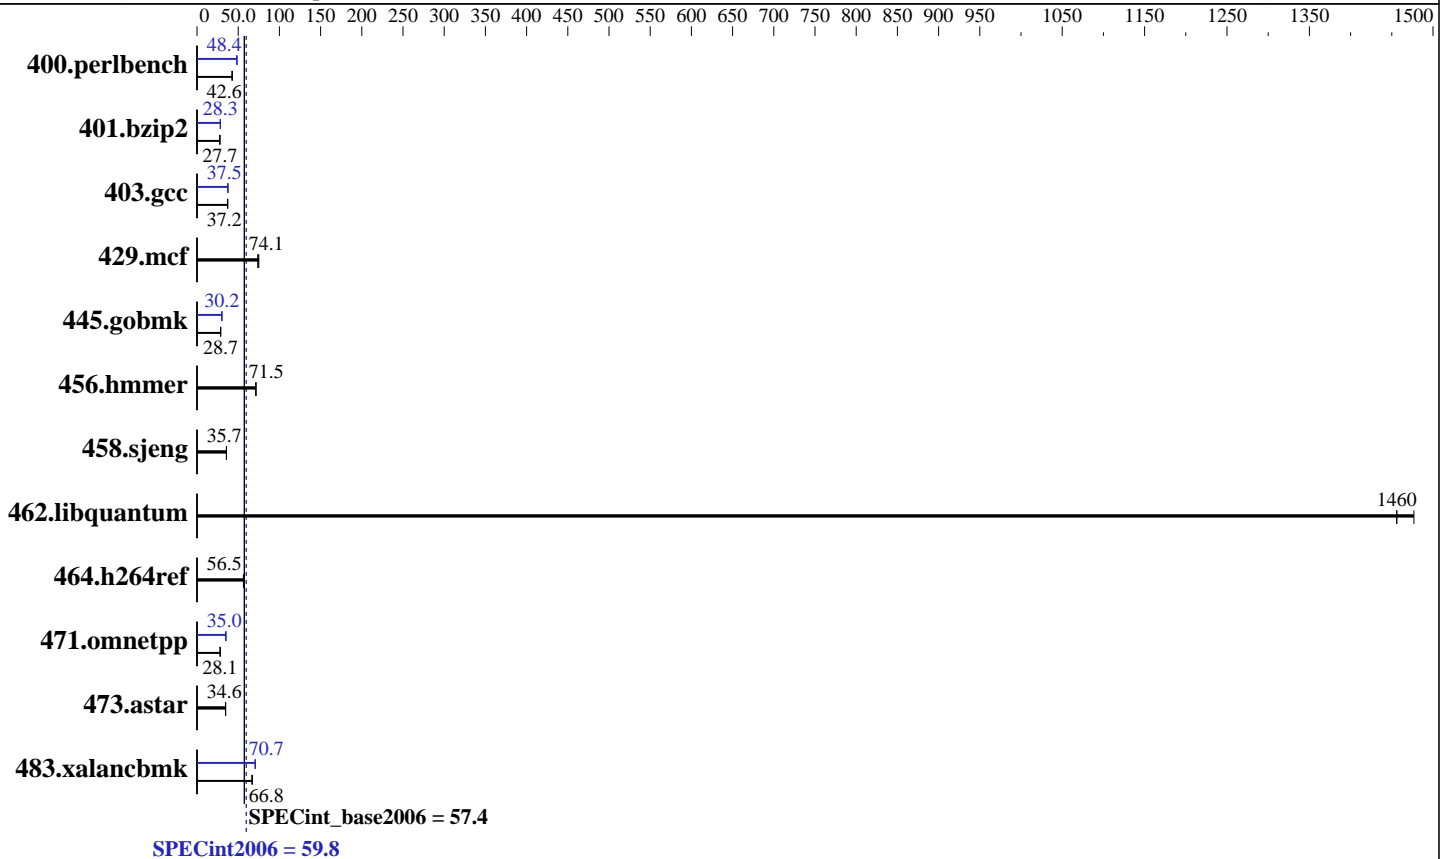

### Hardware

CPU Name: Intel Xeon E3-1230 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Kernel 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint2006 = **59.8**

Express5800/R110f-1E (Intel Xeon E3-1230 v3)

SPECint\_base2006 = **57.4**

CPU2006 license: 9006

Test date: Aug-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	229	42.6	<u>229</u>	<u>42.6</u>	229	42.7	<u>202</u>	<u>48.4</u>	202	48.4	202	48.4
401.bzip2	348	27.8	348	27.7	<u>348</u>	<u>27.7</u>	340	28.4	<u>341</u>	<u>28.3</u>	341	28.3
403.gcc	216	37.2	<u>216</u>	<u>37.2</u>	217	37.2	215	37.4	<u>215</u>	<u>37.5</u>	214	37.6
429.mcf	122	75.0	123	73.9	<u>123</u>	<u>74.1</u>	122	75.0	123	73.9	<u>123</u>	<u>74.1</u>
445.gobmk	365	28.8	366	28.7	<u>366</u>	<u>28.7</u>	348	30.2	<u>348</u>	<u>30.2</u>	348	30.2
456.hammer	131	71.4	130	71.5	<u>131</u>	<u>71.5</u>	131	71.4	130	71.5	<u>131</u>	<u>71.5</u>
458.sjeng	338	35.8	339	35.7	<u>339</u>	<u>35.7</u>	338	35.8	339	35.7	<u>339</u>	<u>35.7</u>
462.libquantum	<u>14.2</u>	<u>1460</u>	14.2	1460	14.0	1480	<u>14.2</u>	<u>1460</u>	14.2	1460	14.0	1480
464.h264ref	393	56.3	391	56.7	<u>392</u>	<u>56.5</u>	393	56.3	391	56.7	<u>392</u>	<u>56.5</u>
471.omnetpp	222	28.1	222	28.2	<u>222</u>	<u>28.1</u>	<u>178</u>	<u>35.0</u>	178	35.1	179	34.9
473.astar	203	34.6	202	34.8	<u>203</u>	<u>34.6</u>	203	34.6	202	34.8	<u>203</u>	<u>34.6</u>
483.xalancbmk	103	66.8	<u>103</u>	<u>66.8</u>	103	67.1	<u>97.5</u>	<u>70.7</u>	97.5	70.8	97.8	70.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"  
OMP\_NUM\_THREADS = "4"

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 59.8

Express5800/R110f-1E (Intel Xeon E3-1230 v3)

SPECint\_base2006 = 57.4

CPU2006 license: 9006

Test date: Aug-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 59.8

Express5800/R110f-1E (Intel Xeon E3-1230 v3)

SPECint\_base2006 = 57.4

CPU2006 license: 9006

Test date: Aug-2013

Test sponsor: NEC Corporation

Hardware Availability: Jul-2013

Tested by: NEC Corporation

Software Availability: Mar-2013

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

```

C++ benchmarks:

```

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias
              -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint2006 = 59.8**

Express5800/R110f-1E (Intel Xeon E3-1230 v3)

**SPECint\_base2006 = 57.4**

**CPU2006 license:** 9006

**Test date:** Aug-2013

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jul-2013

**Tested by:** NEC Corporation

**Software Availability:** Mar-2013

## Peak Optimization Flags (Continued)

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:57:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 September 2013.