



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp<sup>®</sup>\_rate2006 = 470

SPECfp\_rate\_base2006 = 459

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

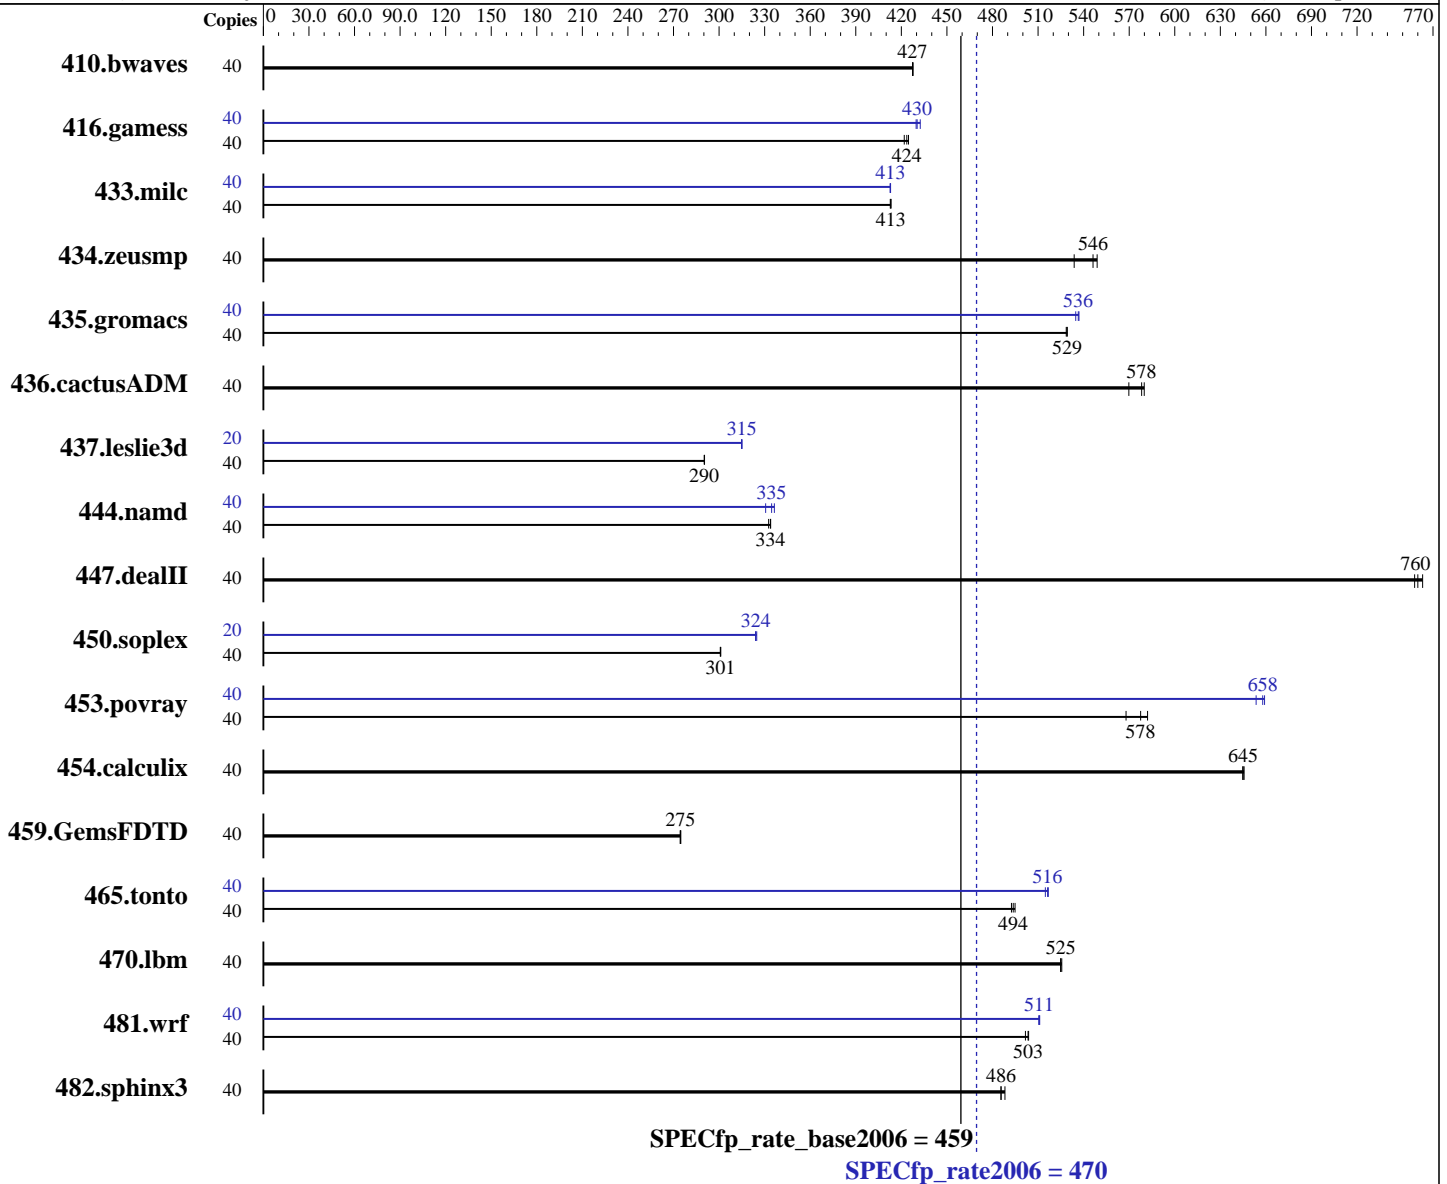

### Hardware

CPU Name: Intel Xeon E5-2650L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp\_rate2006 = 470

SPECfp\_rate\_base2006 = 459

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3L-12800R-11, ECC)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1271	428	1272	427	<u>1272</u>	<u>427</u>	40	1271	428	1272	427	<u>1272</u>	<u>427</u>
416.gamess	40	1844	425	1856	422	<u>1849</u>	<u>424</u>	40	1811	432	1823	430	<u>1820</u>	<u>430</u>
433.milc	40	890	413	889	413	<u>889</u>	<u>413</u>	40	<u>889</u>	<u>413</u>	889	413	890	413
434.zeusmp	40	682	534	663	549	<u>666</u>	<u>546</u>	40	682	534	663	549	<u>666</u>	<u>546</u>
435.gromacs	40	<u>540</u>	<u>529</u>	540	529	540	529	40	532	537	<u>532</u>	<u>536</u>	534	535
436.cactusADM	40	<u>827</u>	<u>578</u>	839	570	824	580	40	<u>827</u>	<u>578</u>	839	570	824	580
437.leslie3d	40	<u>1295</u>	<u>290</u>	1295	290	1295	290	20	597	315	597	315	<u>597</u>	<u>315</u>
444.namd	40	<u>961</u>	<u>334</u>	961	334	964	333	40	954	336	970	331	<u>959</u>	<u>335</u>
447.dealII	40	<u>602</u>	<u>760</u>	600	763	604	758	40	<u>602</u>	<u>760</u>	600	763	604	758
450.soplex	40	1108	301	1109	301	<u>1108</u>	<u>301</u>	20	<u>515</u>	<u>324</u>	514	325	515	324
453.povray	40	<u>368</u>	<u>578</u>	375	568	366	582	40	326	654	<u>323</u>	<u>658</u>	323	659
454.calculix	40	<u>512</u>	<u>645</u>	512	645	511	646	40	<u>512</u>	<u>645</u>	512	645	511	646
459.GemsFDTD	40	1544	275	1547	274	<u>1546</u>	<u>275</u>	40	1544	275	1547	274	<u>1546</u>	<u>275</u>
465.tonto	40	<u>797</u>	<u>494</u>	795	495	799	492	40	765	515	762	517	<u>762</u>	<u>516</u>
470.lbm	40	1046	526	1047	525	<u>1047</u>	<u>525</u>	40	1046	526	1047	525	<u>1047</u>	<u>525</u>
481.wrf	40	<u>888</u>	<u>503</u>	891	502	887	504	40	874	511	<u>875</u>	<u>511</u>	875	510
482.sphinx3	40	1597	488	1605	486	<u>1605</u>	<u>486</u>	40	1597	488	1605	486	<u>1605</u>	<u>486</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp\_rate2006 = 470

SPECfp\_rate\_base2006 = 459

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Oct-2013  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp\_rate2006 = 470

SPECfp\_rate\_base2006 = 459

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Oct-2013  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

## Base Optimization Flags

### C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

### C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

### Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

### Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

### C benchmarks:

icc -m64

### C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

### Fortran benchmarks:

ifort -m64

### Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp\_rate2006 = 470

SPECfp\_rate\_base2006 = 459

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Oct-2013  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S4, Intel Xeon E5-2650L v2, 1.70 GHz

SPECfp\_rate2006 = 470

SPECfp\_rate\_base2006 = 459

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Oct-2013  
Hardware Availability: Oct-2013  
Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 17:59:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 December 2013.