



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro 7047A-T
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECint[®]_rate2006 = 963

SPECint_rate_base2006 = 933

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

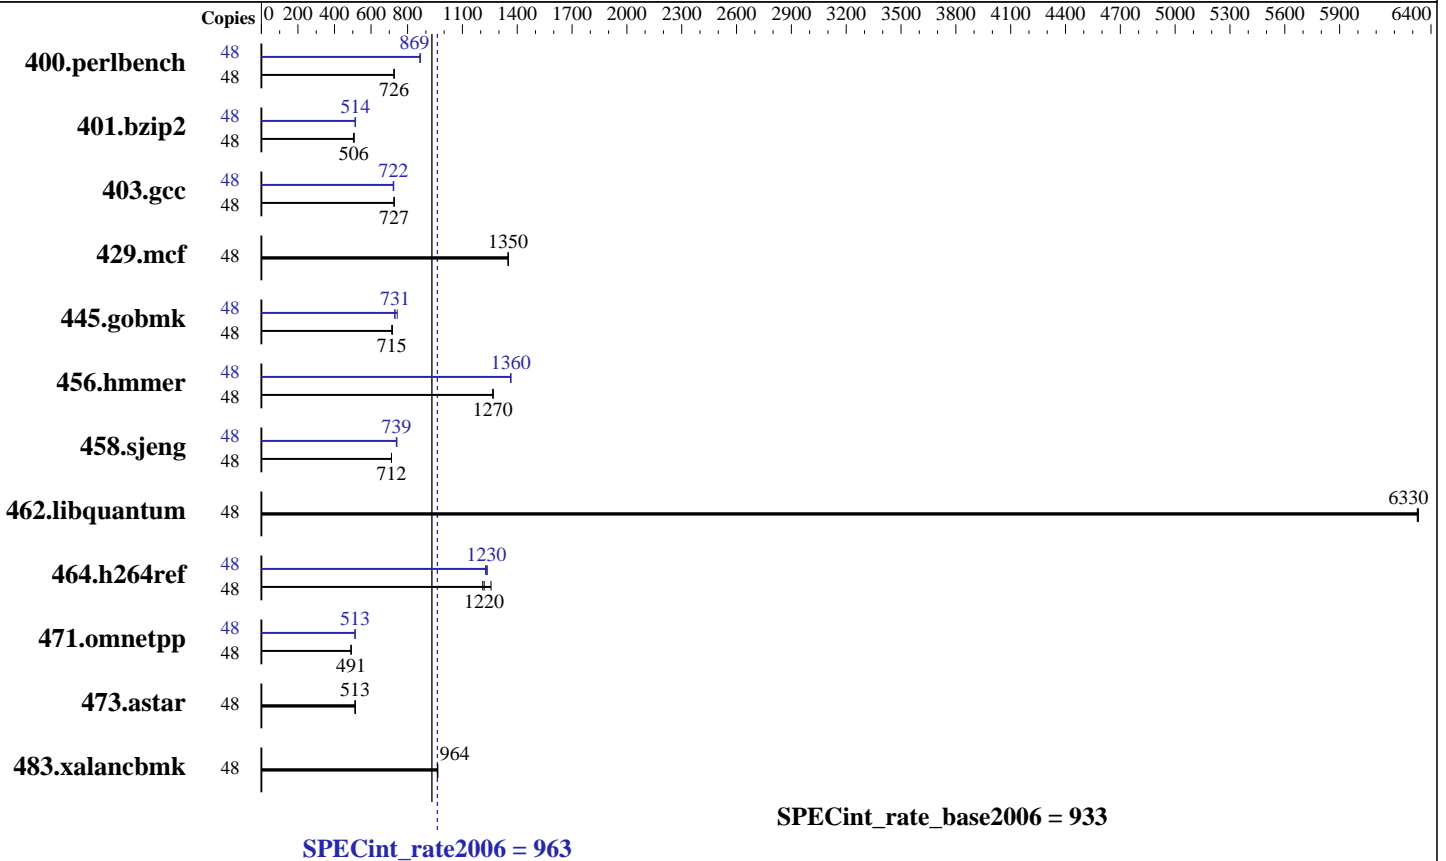

Hardware

CPU Name: Intel Xeon E5-2697 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 300 GB SATA III, 10000 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4
 Kernel 2.6.32-358.23.2.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro 7047A-T
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECint_rate2006 = 963

SPECint_rate_base2006 = 933

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	645	727	647	725	646	726	48	540	868	539	870	540	869
401.bzip2	48	917	505	913	508	916	506	48	902	513	901	514	901	514
403.gcc	48	532	727	532	727	532	726	48	535	722	533	724	535	722
429.mcf	48	324	1350	324	1350	324	1350	48	324	1350	324	1350	324	1350
445.gobmk	48	705	715	702	717	705	714	48	690	730	689	731	677	743
456.hammer	48	354	1270	353	1270	354	1270	48	328	1360	328	1370	329	1360
458.sjeng	48	816	712	816	712	816	712	48	785	739	783	742	787	738
462.libquantum	48	157	6320	157	6330	157	6330	48	157	6320	157	6330	157	6330
464.h264ref	48	871	1220	877	1210	845	1260	48	863	1230	859	1240	866	1230
471.omnetpp	48	611	491	611	491	611	491	48	585	513	585	513	586	512
473.astar	48	657	513	657	513	655	514	48	657	513	657	513	655	514
483.xalancbmk	48	344	963	344	964	343	966	48	344	963	344	964	343	966

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on 188-209.jnet Fri Nov 15 11:29:46 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v2 @ 2.70GHz
2 "physical id"s (chips)
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 24

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 963

Supermicro 7047A-T
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECint_rate_base2006 = 933

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      132123036 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux 188-209.jnet 2.6.32-358.18.1.el6.x86_64 #1 SMP Fri Aug 2 17:04:38 EDT
2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 15 11:27
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_188209-lv_home
                ext4      210G  159G   42G   80% /home
```

```
Additional information from dmidecode:
BIOS American Megatrends Inc. 3.0 11/12/2013
Memory:
16x 8 GB
16x Hynix Semiconducto HMT41GR7AFR8C 8 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro 7047A-T
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECint_rate2006 = 963

SPECint_rate_base2006 = 933

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro 7047A-T
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECint_rate2006 = 963

SPECint_rate_base2006 = 933

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
429.mcf: basepeak = yes
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
462.libquantum: basepeak = yes
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap
473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro 7047A-T
(X9DAi , Intel Xeon E5-2697 v2, 2.70 GHz)

SPECint_rate2006 = 963

SPECint_rate_base2006 = 933

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 20:03:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 February 2014.