



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R820 (Intel Xeon E5-4607 v2, 2.60 GHz)

SPECfp<sup>®</sup>\_rate2006 = 764

SPECfp\_rate\_base2006 = 749

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2013

Hardware Availability: Mar-2014

Software Availability: Aug-2013

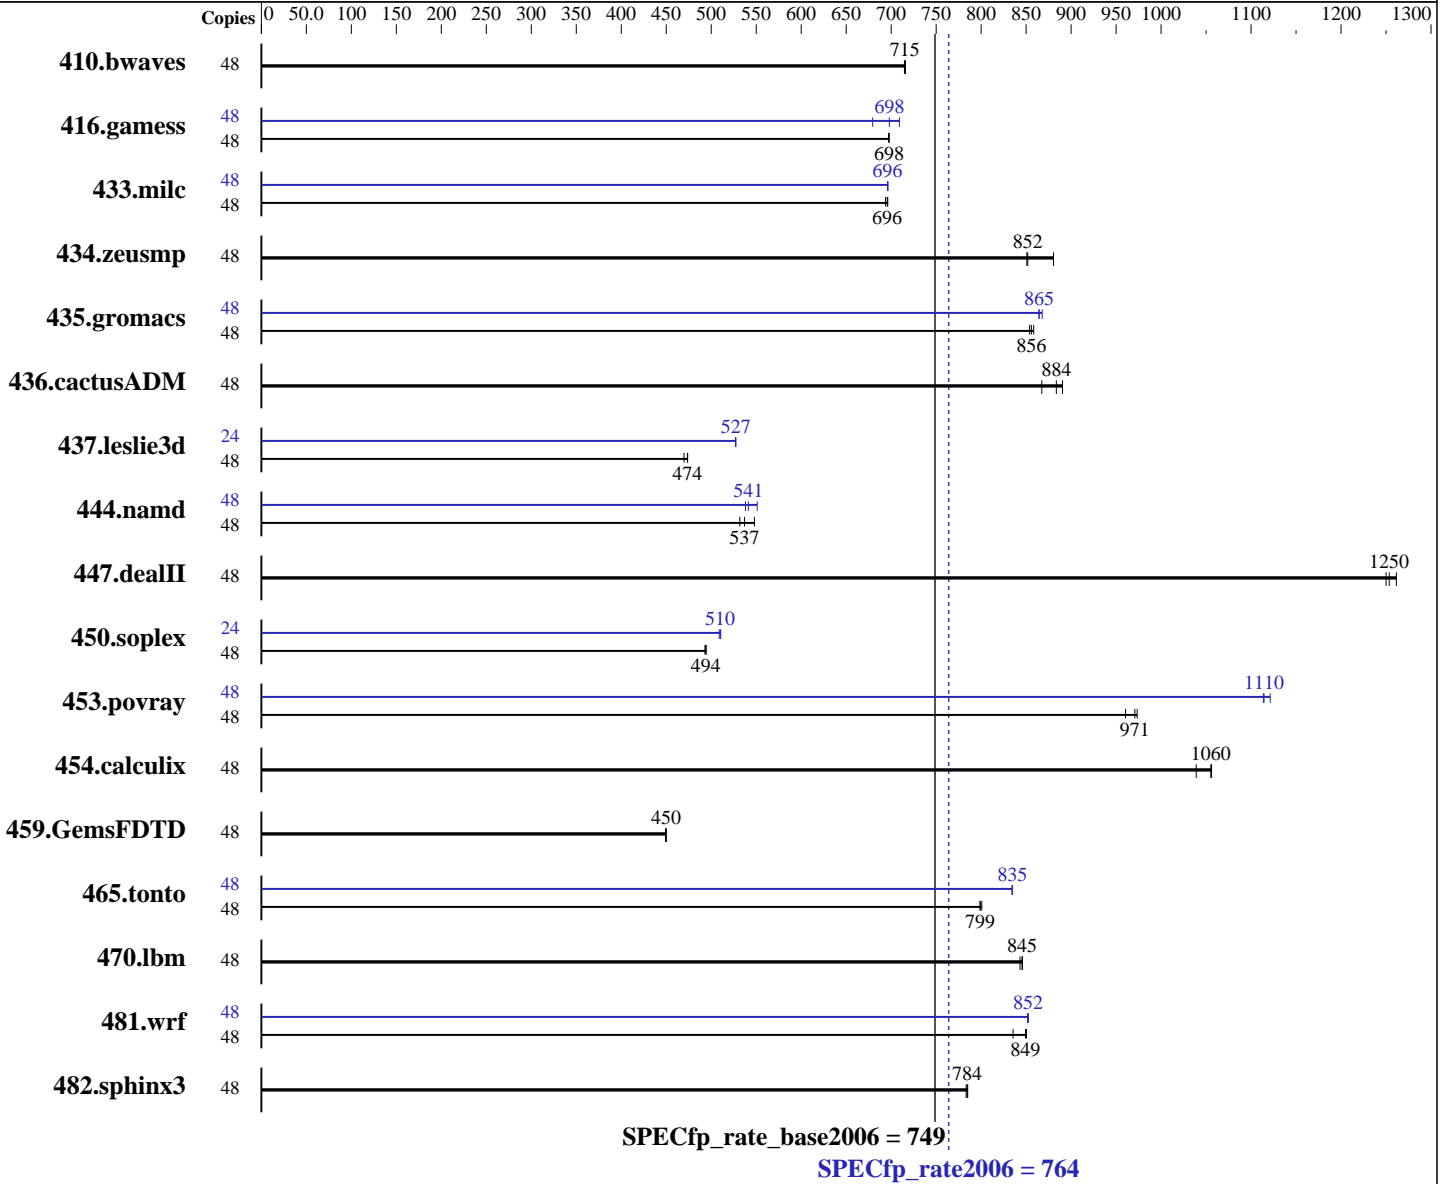

### Hardware

CPU Name: Intel Xeon E5-4607 v2  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R820 (Intel Xeon E5-4607 v2, 2.60 GHz)

SPECfp\_rate2006 = 764

SPECfp\_rate\_base2006 = 749

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2013

Hardware Availability: Mar-2014

Software Availability: Aug-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 200 GB SAS SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	<u>912</u>	<u>715</u>	913	715	911	716	48	<u>912</u>	<u>715</u>	913	715	911	716
416.gamess	48	<u>1347</u>	<u>698</u>	1348	697	1347	698	48	<u>1347</u>	<u>698</u>	1325	709	1383	679
433.milc	48	635	694	<u>633</u>	<u>696</u>	633	696	48	633	696	<u>633</u>	<u>696</u>	633	696
434.zeusmp	48	496	880	513	851	<u>513</u>	<u>852</u>	48	496	880	513	851	<u>513</u>	<u>852</u>
435.gromacs	48	401	854	<u>400</u>	<u>856</u>	399	858	48	397	864	395	868	<u>396</u>	<u>865</u>
436.cactusADM	48	661	867	644	890	<u>649</u>	<u>884</u>	48	661	867	644	890	<u>649</u>	<u>884</u>
437.leslie3d	48	961	470	952	474	<u>953</u>	<u>474</u>	24	428	527	428	527	<u>428</u>	<u>527</u>
444.namd	48	724	532	<u>717</u>	<u>537</u>	702	548	48	<u>711</u>	<u>541</u>	715	538	699	551
447.dealII	48	435	1260	439	1250	<u>438</u>	<u>1250</u>	48	435	1260	439	1250	<u>438</u>	<u>1250</u>
450.soplex	48	810	494	812	493	<u>810</u>	<u>494</u>	24	392	511	393	509	<u>392</u>	<u>510</u>
453.povray	48	262	973	<u>263</u>	<u>971</u>	266	960	48	<u>229</u>	<u>1110</u>	228	1120	229	1110
454.calculix	48	<u>375</u>	<u>1060</u>	375	1060	381	1040	48	<u>375</u>	<u>1060</u>	375	1060	381	1040
459.GemsFDTD	48	1132	450	<u>1132</u>	<u>450</u>	1133	449	48	1132	450	<u>1132</u>	<u>450</u>	1133	449
465.tonto	48	<u>591</u>	<u>799</u>	590	801	591	799	48	566	835	566	834	<u>566</u>	<u>835</u>
470.lbm	48	<u>780</u>	<u>845</u>	780	846	782	843	48	<u>780</u>	<u>845</u>	780	846	782	843
481.wrf	48	630	850	642	835	<u>631</u>	<u>849</u>	48	<u>629</u>	<u>852</u>	630	852	629	852
482.sphinx3	48	1192	785	<u>1193</u>	<u>784</u>	1194	783	48	1192	785	<u>1193</u>	<u>784</u>	1194	783

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
Execute Disable disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp\_rate2006 = 764**

PowerEdge R820 (Intel Xeon E5-4607 v2, 2.60 GHz)

**SPECfp\_rate\_base2006 = 749**

**CPU2006 license:** 55

**Test date:** Oct-2013

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Platform Notes (Continued)

System Profile set to Performance  
Sysinfo program /root/cpu2006.1.2.ic13/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on linux Tue Oct 29 03:34:09 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4607 v2 @ 2.60GHz
 4 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
physical 2: cores 0 1 2 3 4 5
physical 3: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal: 529392212 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 28 14:34 last=S
```

```
SPEC is set to: /root/cpu2006.1.2.ic13
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext2 175G 53G 122G 31% /
```

```
Additional information from dmidecode:
BIOS Dell Inc. 2.0.17 10/01/2013
Memory:
32x 00AD00B300AD HMT42GR7AFR4C-RD 16 GB 1333 MHz
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R820 (Intel Xeon  
E5-4607 v2, 2.60 GHz)

**SPECfp\_rate2006 = 764**

**SPECfp\_rate\_base2006 = 749**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2013

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006.1.2.ic13/libs/32:/root/cpu2006.1.2.ic13/libs/64:/root/cpu2006.1.2.ic13/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R820 (Intel Xeon  
E5-4607 v2, 2.60 GHz)

**SPECfp\_rate2006 = 764**

**SPECfp\_rate\_base2006 = 749**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2013

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R820 (Intel Xeon  
E5-4607 v2, 2.60 GHz)

**SPECfp\_rate2006 = 764**

**SPECfp\_rate\_base2006 = 749**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2013

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R820 (Intel Xeon E5-4607 v2, 2.60 GHz)

**SPECfp\_rate2006 = 764**

**SPECfp\_rate\_base2006 = 749**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Oct-2013

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:41:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 April 2014.