



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp[®]_rate2006 = 133

Intel DH77KC motherboard (Intel i7-3770K)

SPECfp_rate_base2006 = 130

CPU2006 license: 13


Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: May-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

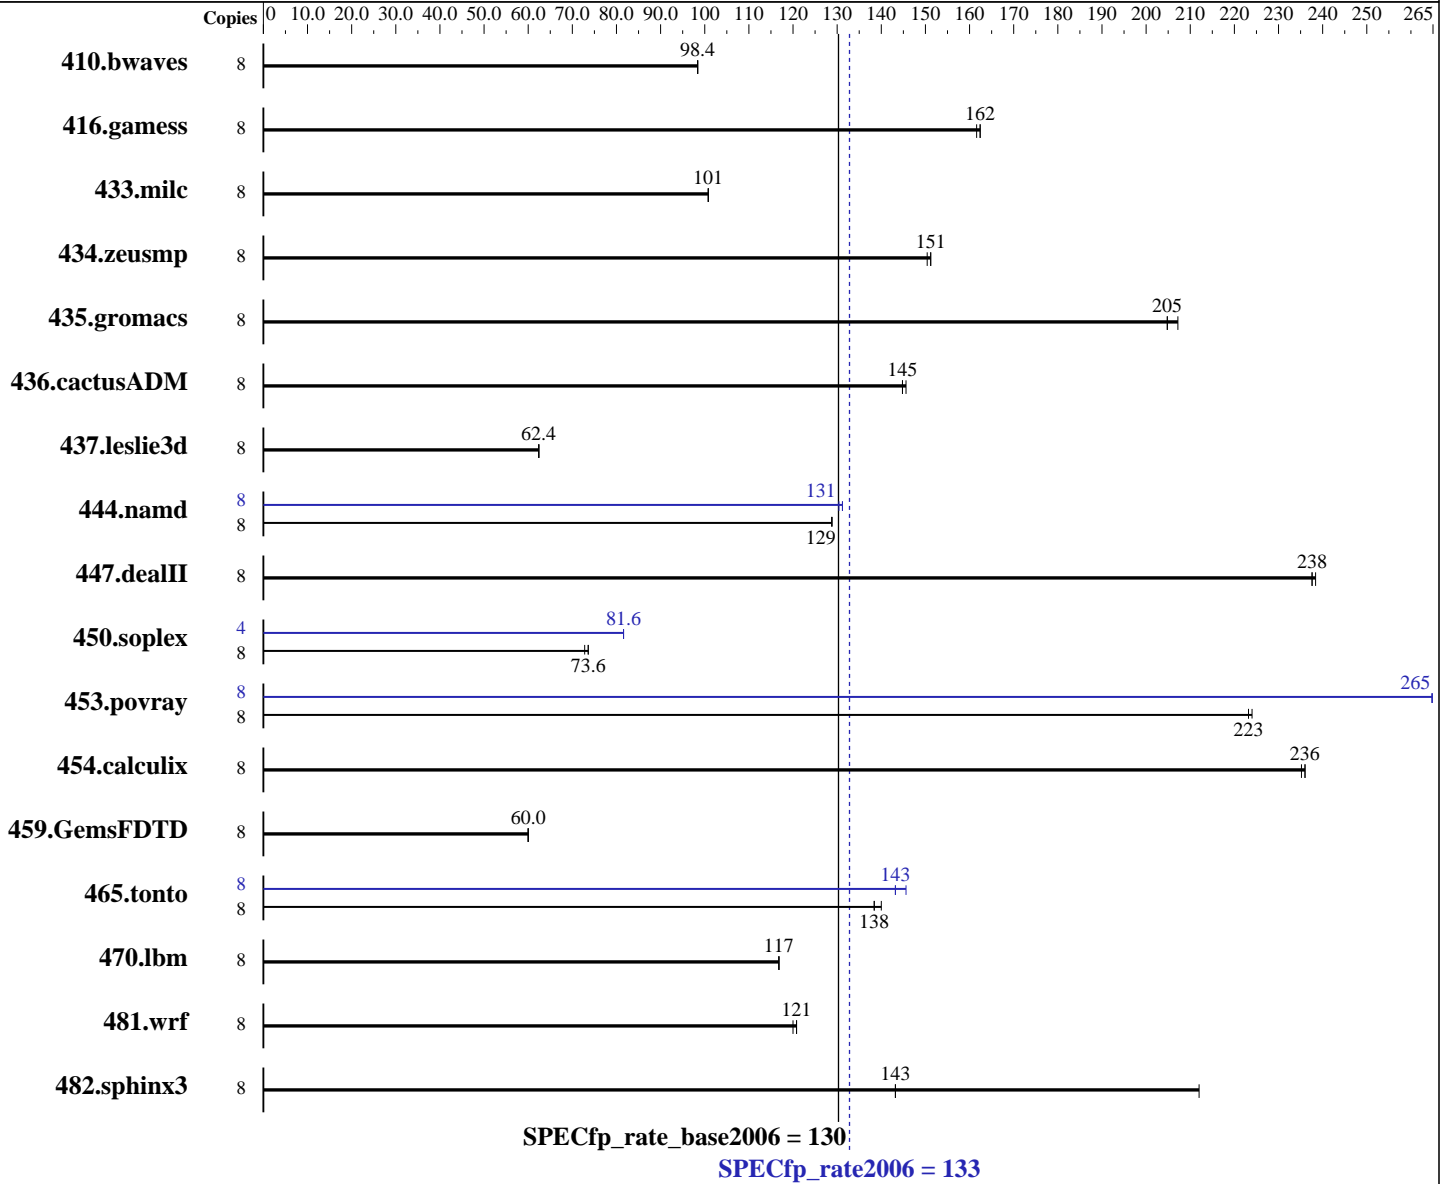

Hardware

CPU Name: Intel Core i7-3770K
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 133

Intel DH77KC motherboard (Intel i7-3770K)

SPECfp_rate_base2006 = 130

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: May-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
 Disk Subsystem: 180 GB Intel SSD 530
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	1108	98.4	1107	98.4	1108	98.4	8	1108	98.4	1107	98.4	1108	98.4		
416.gamess	8	966	162	968	162	964	162	8	966	162	968	162	964	162		
433.milc	8	731	101	730	101	730	101	8	731	101	730	101	730	101		
434.zeusmp	8	482	151	484	150	481	151	8	482	151	484	150	481	151		
435.gromacs	8	279	205	279	205	276	207	8	279	205	279	205	276	207		
436.cactusADM	8	659	145	657	146	660	145	8	659	145	657	146	660	145		
437.leslie3d	8	1206	62.4	1204	62.4	1205	62.4	8	1206	62.4	1204	62.4	1205	62.4		
444.namd	8	499	129	498	129	497	129	8	488	131	489	131	491	130		
447.dealII	8	385	238	385	238	384	238	8	385	238	385	238	384	238		
450.soplex	8	902	73.6	903	73.6	912	72.8	4	410	81.6	409	81.6	410	81.6		
453.povray	8	191	223	190	223	190	224	8	161	265	161	265	161	265		
454.calculix	8	279	236	281	235	280	236	8	279	236	281	235	280	236		
459.GemsFDTD	8	1414	60.0	1415	60.0	1415	60.0	8	1414	60.0	1415	60.0	1415	60.0		
465.tonto	8	568	138	570	138	561	140	8	542	146	550	143	550	143		
470.lbm	8	942	117	943	117	941	117	8	942	117	943	117	941	117		
481.wrf	8	740	121	741	121	744	120	8	740	121	741	121	744	120		
482.sphinx3	8	1088	143	736	212	1091	143	8	1088	143	736	212	1091	143		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
 "ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 133

Intel DH77KC motherboard (Intel i7-3770K)

SPECfp_rate_base2006 = 130

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: May-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on IVB9600 Sat May 17 14:50:47 2014

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8.1 Pro
OS Version : 6.3.9600 N/A Build 9600
System Manufacturer: INTEL_
System Model : DH77KC__
Processor(s) : 1 Processor(s) Installed.
 [01]: Intel64 Family 6 Model 58 Stepping 8 GenuineIntel ~3501 Mhz
BIOS Version : Intel Corp. KCH7710H.86A.0110.2013.0513.1018, 5/13/2013
Total Physical Memory: 8,089 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 1024
L3CacheSize : 8192
MaxClockSpeed : 3501
Name : Intel(R) Core(TM) i7-3770K CPU @ 3.50GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 8

(End of data from sysinfo program)

BIOS: SATA mode set to RAID

Windows Disk Driver: Intel Rapid Storage Technology 12.9.0.1001

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 133

Intel DH77KC motherboard (Intel i7-3770K)

SPECfp_rate_base2006 = 130

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: May-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 -Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 133

Intel DH77KC motherboard (Intel i7-3770K)

SPECfp_rate_base2006 = 130

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: May-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000
sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 133

Intel DH77KC motherboard (Intel i7-3770K)

SPECfp_rate_base2006 = 130

CPU2006 license: 13

Test date: May-2014

Test sponsor: Intel Corporation

Hardware Availability: May-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 9 10:44:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2014.