



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®2006 = **63.9**

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_base2006 = **62.3**

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Jun-2014

Software Availability: Oct-2013

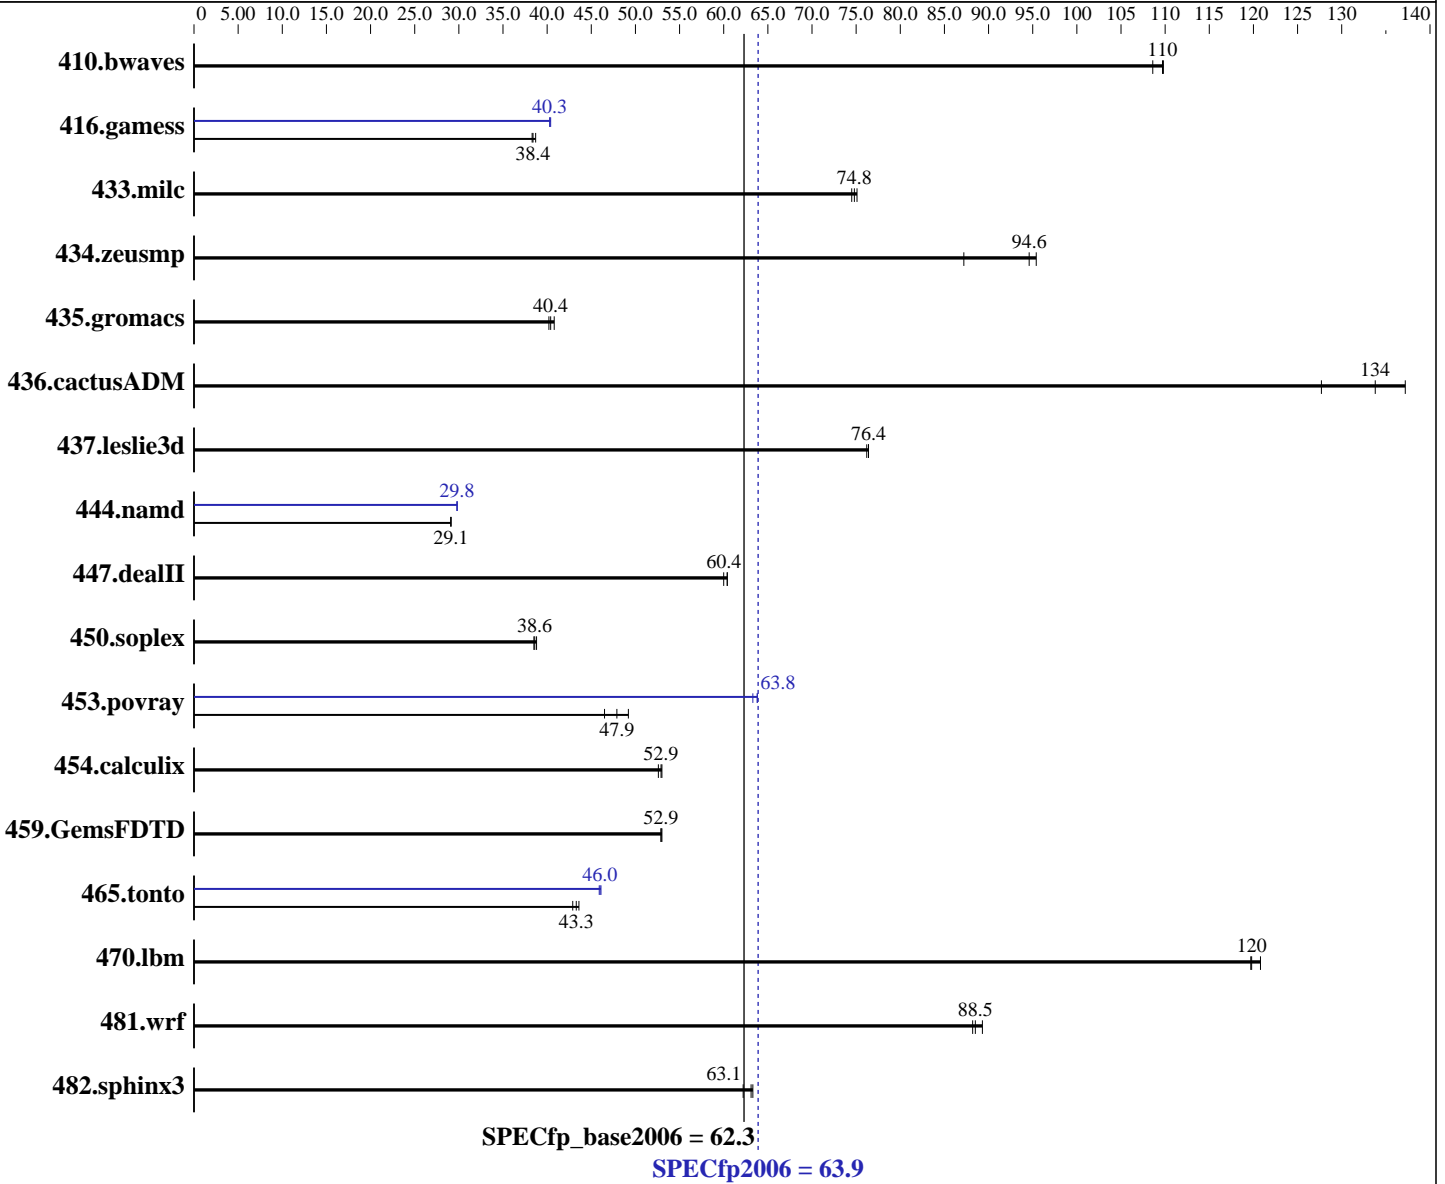

Hardware

CPU Name: Intel Core i5-4590
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: Yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = **63.9**

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_base2006 = **62.3**

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
 Disk Subsystem: 1 TB SATA HDD, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	125	109	124	110	124	110	125	109	124	110	124	110
416.gamess	511	38.3	506	38.7	510	38.4	486	40.3	485	40.4	486	40.3
433.milc	122	75.1	123	74.5	123	74.8	122	75.1	123	74.5	123	74.8
434.zeusmp	95.4	95.4	104	87.2	96.2	94.6	95.4	95.4	104	87.2	96.2	94.6
435.gromacs	178	40.2	175	40.8	177	40.4	178	40.2	175	40.8	177	40.4
436.cactusADM	87.1	137	89.3	134	93.6	128	87.1	137	89.3	134	93.6	128
437.leslie3d	123	76.4	123	76.2	123	76.4	123	76.4	123	76.2	123	76.4
444.namd	276	29.1	276	29.1	276	29.1	269	29.8	269	29.8	269	29.8
447.dealII	190	60.4	189	60.4	191	60.0	190	60.4	189	60.4	191	60.0
450.soplex	216	38.6	215	38.8	217	38.5	216	38.6	215	38.8	217	38.5
453.povray	111	47.9	115	46.5	108	49.2	83.4	63.8	83.4	63.8	84.0	63.3
454.calculix	157	52.6	156	53.0	156	52.9	157	52.6	156	53.0	156	52.9
459.GemsFDTD	200	53.0	200	52.9	201	52.9	200	53.0	200	52.9	201	52.9
465.tonto	226	43.6	227	43.3	230	42.9	214	45.9	214	46.1	214	46.0
470.lbm	115	120	114	121	115	120	115	120	114	121	115	120
481.wrf	125	89.3	126	88.5	127	88.2	125	89.3	126	88.5	127	88.2
482.sphinx3	308	63.3	313	62.2	309	63.1	308	63.3	313	62.2	309	63.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
 "ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Platform Notes

Sysinfo program C:\SPEC14.0\Docs\sysinfo
 \$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
 running on Clt10C37B4DEDF8 Fri Jun 27 20:23:09 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 63.9

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_base2006 = 62.3

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8.1 Pro

OS Version : 6.3.9600 N/A Build 9600

System Manufacturer: ASUS

System Model : All Series

Processor(s) : 1 Processor(s) Installed.

[01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3301 Mhz

BIOS Version : American Megatrends Inc. 2001, 6/13/2014

Total Physical Memory: 8,006 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0

L2CacheSize : 1024

L3CacheSize : 6144

MaxClockSpeed : 3301

Name : Intel(R) Core(TM) i5-4590 CPU @ 3.30GHz

NumberOfCores : 4

NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores

KMP_AFFINITY set to granularity=fine,scatter

Binaries compiled on a system with 1x Intel Core i7-860 CPU

+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 63.9

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_base2006 = 62.3

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

C++ benchmarks:

```

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000

```

Benchmarks using both Fortran and C:

```

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

Peak Compiler Invocation

C benchmarks:

```

icl -Qvc10 -Qstd=c99

```

C++ benchmarks:

```

icl -Qvc10

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 63.9

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_base2006 = 62.3

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
sh1W64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 63.9

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_base2006 = 62.3

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 9 10:50:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 August 2014.